



# Chelsio Unified Wire for Linux

## Installation and User Guide



---

This document and related products are distributed under licenses restricting their use, copying, distribution, and reverse-engineering.

No part of this document may be reproduced in any form or by any means without prior written permission by Chelsio Communications.

All third-party trademarks are copyright of their respective owners.

THIS DOCUMENTATION IS PROVIDED “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

THE USE OF THE SOFTWARE AND ANY ASSOCIATED MATERIALS (COLLECTIVELY THE “SOFTWARE”) IS SUBJECT TO THE SOFTWARE LICENSE TERMS OF CHELSIO COMMUNICATIONS, INC.



**Chelsio Communications (Headquarters)**

735 N Pastoria Avenue,  
Sunnyvale, CA 94085  
U.S.A

[www.chelsio.com](http://www.chelsio.com)

Tel: 408.962.3600  
Fax: 408.962.3661

**Chelsio (India) Private Limited**

Subramanya Arcade, Floor 3, Tower B  
No. 12, Bannerghatta Road,  
Bangalore-560029  
Karnataka,  
India

Tel: +91-80-4039-6800

**Sales**

For all sales inquiries, send an email to [sales@chelsio.com](mailto:sales@chelsio.com)

**Support**

For all support related questions, send an email to [support@chelsio.com](mailto:support@chelsio.com)

Copyright © 2026. Chelsio Communications. All Rights Reserved.

Chelsio ® is a registered trademark of Chelsio Communications.

All other marks and names mentioned herein may be trademarks of their respective companies.

---

## Document History

Version	Revision Date
1.5.7	01/31/2022
1.5.8	03/15/2022
1.5.9	07/29/2022
1.6.0	12/02/2022
1.6.1	04/07/2023
1.6.2	08/04/2023
1.6.3	01/22/2024
1.6.4	04/30/2024
1.6.5	11/22/2024
1.6.6	11/28/2025
1.6.7	01/30/2026
1.6.8	03/02/2026
1.6.9	03/31/2026
1.7.0	04/15/2026
1.7.1	04/30/2026
1.7.2	05/27/2026
1.7.3	06/08/2026

---

## **TABLE OF CONTENTS**

<b>I. CHELSIO UNIFIED WIRE</b>	<b>16</b>
<b>1. Introduction</b>	<b>17</b>
1.1. Features	18
1.2. Hardware Requirements	19
1.3. Software Requirements	19
1.4. Package Contents	19
<b>2. Hardware Installation</b>	<b>22</b>
2.1. Installing the Chelsio T7 Adapters	22
2.2. Installing the Chelsio T6 Adapters	23
<b>3. Software/Driver Installation</b>	<b>25</b>
3.1. Pre-requisites	25
3.2. Installing Chelsio Unified Wire	26
3.3. Firmware flash and init/vpd update	32
3.4. Mounting debugfs	34
3.5. Collect all adapter logs using cudbg_app	34
<b>4. Configuring Chelsio Network Interfaces</b>	<b>35</b>
4.1. Configuring Chelsio T7 Adapters	35
4.2. Configuring Chelsio T6 Adapters	35
4.3. Configuring NetworkManager keyfiles	39
4.4. Creating Network Manager keyfiles manually	40
4.5. Configuring IPv6	41
4.6. Checking Link	41
<b>5. Performance Tuning</b>	<b>42</b>
5.1. Generic	42
5.2. Throughput	42
5.3. Latency	43
<b>6. Software/Driver Update</b>	<b>44</b>
<b>7. Software/Driver Uninstallation</b>	<b>45</b>
7.1. Uninstalling Chelsio Unified Wire from source	45
<b>II. NETWORK (NIC/TOE)</b>	<b>46</b>
<b>1. Introduction</b>	<b>47</b>
1.1. Hardware Requirements	47
1.2. Software Requirements	48
<b>2. Software/Driver Installation</b>	<b>49</b>
<b>3. Software/Driver Loading</b>	<b>50</b>
3.1. Loading in NIC mode (without full offload support)	50
3.2. Loading in TOE mode (with full offload support)	50
<b>4. Software/Driver Configuration</b>	<b>51</b>
4.1. Enabling TCP Offload	51

---

4.2.	VXLAN Offload	51
4.3.	HMA	54
4.4.	Performance Tuning	54
<b>5.</b>	<b>Software/Driver Unloading</b>	<b>60</b>
5.1.	Unloading the NIC Driver	60
5.2.	Unloading the TOE Driver	60
<b>III.</b>	<b>VIRTUAL FUNCTION NETWORK (VNIC)</b>	<b>61</b>
<b>1.</b>	<b>Introduction</b>	<b>62</b>
1.1.	Hardware Requirements	62
1.2.	Software Requirements	63
<b>1.</b>	<b>Software/Driver Installation</b>	<b>64</b>
1.1.	Pre-requisites	64
1.2.	Installation	64
<b>2.</b>	<b>Software/Driver Loading</b>	<b>65</b>
2.1.	Instantiate Virtual Functions (SR-IOV)	65
2.2.	Loading the Driver	65
<b>3.</b>	<b>Software/Driver Configuration and Fine-tuning</b>	<b>66</b>
3.1.	VF Communication	66
3.2.	VF Link state	67
3.3.	VF Rate Limiting	67
3.4.	Bonding	68
3.5.	High Capacity VF Configuration	70
<b>4.</b>	<b>Software/Driver Unloading</b>	<b>72</b>
4.1.	Unloading the Driver	72
<b>IV.</b>	<b>IWARP RDMA OFFLOAD</b>	<b>73</b>
<b>1.</b>	<b>Introduction</b>	<b>74</b>
1.1.	Hardware Requirements	74
1.2.	Software Requirements	74
<b>2.</b>	<b>Software/Driver Installation</b>	<b>75</b>
2.1.	Pre-requisites	75
2.2.	Installation	75
<b>3.</b>	<b>Software/Driver Loading</b>	<b>76</b>
3.1.	Loading iWARP Driver	76
<b>4.</b>	<b>Software/Driver Configuration and Fine-tuning</b>	<b>77</b>
4.1.	Testing connectivity with <i>ping</i> and <i>rping</i>	77
4.2.	Enabling various MPIs	78
4.3.	Setting up NFS-RDMA	82
4.4.	HMA	83
4.5.	Performance Tuning	84
<b>5.</b>	<b>Software/Driver Unloading</b>	<b>85</b>

---

---

<b>V. ROCEV2</b>	<b>86</b>
<b>1. Introduction</b>	<b>87</b>
1.1. Hardware Requirements	87
1.2. Software Requirements	87
<b>2. Software/Driver Loading</b>	<b>88</b>
2.1. Loading RoCEv2 Driver	88
<b>3. Software/Driver Configuration and Fine-tuning</b>	<b>89</b>
3.1. Testing connectivity with <i>ping</i> and <i>rping</i>	89
3.2. Setting up NFS-RDMA	90
3.3. Performance Tuning	91
<b>4. Software/Driver Unloading</b>	<b>92</b>
<b>VI. NVME-OF IWARP</b>	<b>93</b>
<b>1. Introduction</b>	<b>94</b>
1.1. Hardware Requirements	94
1.2. Software Requirements	94
<b>2. Kernel Configuration</b>	<b>95</b>
3.1. Pre-requisites	96
3.2. Installation	96
<b>4. Software/Driver Loading</b>	<b>97</b>
<b>5. Software/Driver Configuration and Fine-tuning</b>	<b>98</b>
5.1. Target	98
5.2. Initiator	99
5.3. HMA	100
5.4. Performance Tuning	100
<b>6. Software/Driver Unloading</b>	<b>102</b>
<b>VII. NVME-OF ROCEV2</b>	<b>103</b>
<b>1. Introduction</b>	<b>104</b>
1.1. Hardware Requirements	104
1.2. Software Requirements	104
<b>2. Kernel Configuration</b>	<b>105</b>
<b>3. Software/Driver Loading</b>	<b>106</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>107</b>
4.1. Target	107
4.2. Performance Tuning	108
<b>5. Software/Driver Unloading</b>	<b>109</b>
<b>VIII. SPDK (USER SPACE) NVME-OF IWARP</b>	<b>110</b>
<b>1. Introduction</b>	<b>111</b>
1.1. Hardware Requirements	111
1.2. Software Requirements	111

---

---

<b>2. Kernel Configuration</b>	<b>112</b>
<b>3. Software/Driver Loading</b>	<b>113</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>114</b>
4.1. Target	114
4.2. Initiator	115
4.3. Performance Tuning	115
<b>5. Software/Driver Unloading</b>	<b>116</b>
<b>IX. SPDK (USER SPACE) NVME-OF ROCEV2</b>	<b>117</b>
<b>1. Introduction</b>	<b>118</b>
1.1. Hardware Requirements	118
1.2. Software Requirements	118
<b>2. Kernel Configuration</b>	<b>119</b>
<b>3. Software/Driver Loading</b>	<b>120</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>121</b>
4.1. Target	121
4.2. Initiator	122
4.3. Performance Tuning	122
<b>5. Software/Driver Unloading</b>	<b>123</b>
<b>X. NVME-OF TOE</b>	<b>124</b>
<b>1. Introduction</b>	<b>125</b>
1.1. Hardware Requirements	125
1.2. Software Requirements	125
<b>2. Kernel Configuration</b>	<b>126</b>
<b>3. Software/Driver Installation</b>	<b>127</b>
3.1. Installation	127
<b>4. Software/Driver Loading</b>	<b>128</b>
<b>5. Software/Driver Configuration and Fine-tuning</b>	<b>129</b>
5.1. Target	129
5.2. Initiator	129
5.3. HMA	130
5.4. Performance Tuning	131
<b>6. Software/Driver Unloading</b>	<b>132</b>
<b>XI. SPDK (USER SPACE) NVME-OF TOE</b>	<b>133</b>
<b>1. Introduction</b>	<b>134</b>
1.1. Hardware Requirements	134
1.2. Software Requirements	134
<b>2. Kernel Configuration</b>	<b>135</b>
<b>3. Software/Driver Installation</b>	<b>136</b>
3.1. Installation	136

---

---

<b>4. Software/Driver Loading</b>	<b>137</b>
<b>5. Software/Driver Configuration and Fine-tuning</b>	<b>138</b>
5.1. Target	138
5.2. Initiator	139
<b>6. Software/Driver Unloading</b>	<b>140</b>
<b>XII. NVME-OF/TCP PDU OFFLOAD</b>	<b>141</b>
<b>1. Introduction</b>	<b>142</b>
1.1. Hardware Requirements	142
1.2. Software Requirements	142
<b>2. Kernel Configuration</b>	<b>143</b>
<b>3. Software/Driver Loading</b>	<b>144</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>145</b>
4.1. Target	145
4.2. Initiator	146
<b>5. Software/Driver Unloading</b>	<b>147</b>
<b>XIII. SPDK (USER SPACE) NVME/TCP PDU OFFLOAD</b>	<b>148</b>
<b>1. Introduction</b>	<b>149</b>
1.1. Hardware Requirements	149
1.2. Software Requirements	149
<b>2. Driver Installation</b>	<b>150</b>
<b>3. Software/Driver Loading</b>	<b>151</b>
<b>4. Configuration</b>	<b>152</b>
4.1. Configuring SPDK NVMe/TCP PDU Offload	152
4.2. SPDK NVMe/TCP PDU Offload Target	152
4.3. SPDK NVMe/TCP PDU Offload Initiator	153
<b>5. Software/Driver Unloading</b>	<b>154</b>
<b>XIV. SPDK NVME/TCP OVER MEMFREE TOE</b>	<b>155</b>
<b>1. Introduction</b>	<b>156</b>
1.1. Hardware Requirements	156
1.2. Software Requirements	156
<b>2. Compiling and installing spdk</b>	<b>157</b>
<b>3. Software/Driver Loading</b>	<b>158</b>
<b>4. Configuration</b>	<b>159</b>
4.1. Configuring SPDK NVMe/TCP over Memfree TOE	159
4.2. SPDK NVMe/TCP over Memfree TOE Target	159
4.3. SPDK NVMe/TCP Over Memfree TOE Initiator	160
<b>XV. SOFTIWARP</b>	<b>161</b>
<b>1. Introduction</b>	<b>162</b>

---

---

1.1.	Hardware Requirements	162
1.2.	Software Requirements	163
<b>2.</b>	<b>Kernel Configuration</b>	<b>164</b>
<b>3.</b>	<b>Software/Driver Loading</b>	<b>165</b>
<b>4.</b>	<b>Software/Driver Configuration and Fine-tuning</b>	<b>166</b>
4.1.	Initiator/Client	166
<b>5.</b>	<b>Software/Driver Unloading</b>	<b>167</b>
 <b>XVI. LIO ISCSI TARGET OFFLOAD</b>		 <b>168</b>
<b>1.</b>	<b>Introduction</b>	<b>169</b>
1.1.	Hardware Requirements	169
1.2.	Software Requirements	170
<b>2.</b>	<b>Kernel Configuration</b>	<b>171</b>
<b>3.</b>	<b>Software/Driver Installation</b>	<b>173</b>
3.1.	Pre-requisites	173
3.2.	Installation	173
<b>4.</b>	<b>Software/Driver Loading</b>	<b>175</b>
<b>5.</b>	<b>Software/Driver Configuration and Fine-tuning</b>	<b>176</b>
5.1.	Configuring LIO iSCSI Target	176
5.2.	Offloading LIO iSCSI Connection	176
5.3.	Running LIO iSCSI and Network Traffic Concurrently	176
5.4.	Performance Tuning	177
<b>6.</b>	<b>Software/Driver Unloading</b>	<b>178</b>
6.1.	Unloading the LIO iSCSI Target Offload Driver	178
6.2.	Unloading the NIC Driver	178
 <b>XVII. ISCSI PDU OFFLOAD INITIATOR</b>		 <b>179</b>
<b>1.</b>	<b>Introduction</b>	<b>180</b>
1.1.	Hardware Requirements	180
1.2.	Software Requirements	181
1.3.	Pre-requisites	181
<b>2.</b>	<b>Software/Driver Installation</b>	<b>182</b>
2.1.	Pre-requisites	182
2.2.	Installation	182
<b>3.</b>	<b>Software/Driver Loading</b>	<b>183</b>
<b>4.</b>	<b>Software/Driver Configuration and Fine-tuning</b>	<b>184</b>
4.1.	Accelerating open-iSCSI Initiator	184
4.2.	HMA	186
4.3.	Auto login from cxgb4i initiator at OS bootup	187
4.4.	Performance Tuning	187
<b>5.</b>	<b>Software/Driver Unloading</b>	<b>188</b>

---

---

<b>XVIII.SPDK (USER SPACE) ISCSI PDU OFFLOAD</b>	<b>189</b>
<b>1. Introduction</b>	<b>190</b>
1.1. Hardware Requirements	190
1.2. Software Requirements	190
<b>2. Driver Installation</b>	<b>191</b>
<b>3. Software/Driver Loading</b>	<b>192</b>
<b>4. Configuration</b>	<b>193</b>
4.1. Configuring SPDK iSCSI PDU Offload target/initiator	193
4.2. SPDK iSCSI PDU Offload Target	193
4.3. SPDK iSCSI PDU Offload Initiator	194
<b>5. Software/Driver Unloading</b>	<b>194</b>
<b>XIX. SPDK (USER SPACE) ISCSI OVER MEMFREE TOE</b>	<b>195</b>
<b>1. Introduction</b>	<b>196</b>
1.1. Hardware Requirements	196
1.2. Software Requirements	196
<b>2. Compiling and installing spdk</b>	<b>197</b>
<b>3. Software/Driver Loading</b>	<b>198</b>
<b>4. Configuration</b>	<b>199</b>
4.1. Configuring SPDK iSCSI over Memfree TOE target	199
4.2. SPDK iSCSI over Memfree TOE Target	199
<b>XX. CRYPTO OFFLOAD</b>	<b>200</b>
<b>1. Introduction</b>	<b>201</b>
1.1. Hardware Requirements	201
1.2. Software Requirements	201
<b>2. Kernel Configuration</b>	<b>202</b>
<b>3. Software/Driver Installation</b>	<b>204</b>
3.1. Pre-requisites	204
3.2. Installation	204
<b>4. Software/Driver Loading</b>	<b>205</b>
4.1. Inline	205
4.2. Co-processor	205
<b>5. Software/Driver Configuration and Fine-tuning</b>	<b>207</b>
5.1. Configuring OpenSSL	207
5.2. Co-processor IPsec Offload	209
5.3. Inline TLS Offload	213
5.4. Co-processor	216
5.5. Performance Tuning	219
<b>6. Software/Driver Unloading</b>	<b>220</b>
<b>XXI. INLINE IPSEC OFFLOAD</b>	<b>221</b>

---

---

<b>1. Introduction</b>	<b>222</b>
1.1. Hardware Requirements	222
1.2. Software Requirements	222
<b>2. Kernel Configuration</b>	<b>223</b>
2.1. Kernel Configuration	223
<b>3. Software/Driver Loading</b>	<b>224</b>
<b>4. Configuration</b>	<b>225</b>
4.1. Using ip xfrm	225
<b>5. Software/Driver Unloading</b>	<b>230</b>
<b>XXII. ISER</b>	<b>231</b>
<b>1. Introduction</b>	<b>232</b>
1.1. Hardware Requirements	232
1.2. Software Requirements	232
<b>2. Kernel Configuration</b>	<b>233</b>
<b>3. Software/Driver Installation</b>	<b>234</b>
3.1. Pre-requisites	234
3.2. Installation	234
<b>4. Software/Driver Loading</b>	<b>235</b>
<b>5. Software/Driver Configuration and Fine-tuning</b>	<b>236</b>
5.1. HMA	237
5.2. Performance Tuning	237
<b>6. Software/Driver Unloading</b>	<b>238</b>
<b>XXIII.WD-UDP</b>	<b>239</b>
<b>1. Introduction</b>	<b>240</b>
1.1. Hardware Requirements	240
1.2. Software Requirements	240
<b>2. Software/Driver Installation</b>	<b>241</b>
2.1. Pre-requisites	241
2.2. Installation	241
<b>3. Software/Driver Loading</b>	<b>242</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>243</b>
4.1. Accelerating UDP Socket Communications	243
<b>5. Software/Driver Unloading</b>	<b>248</b>
<b>XXIV. DATA CENTER BRIDGING (DCB)</b>	<b>249</b>
<b>1. Introduction</b>	<b>250</b>
1.1. Hardware Requirements	250
1.2. Software Requirements	251
<b>2. Software/Driver Installation</b>	<b>252</b>
<b>3. Software/Driver Loading</b>	<b>253</b>

---

---

<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>254</b>
4.1. Configuring Cisco Nexus 5010 switch	254
4.2. Configuring the Brocade 8000 switch	256
<b>5. Running NIC &amp; iSCSI Traffic together with DCBx</b>	<b>258</b>
<b>XXV. FCOE FULL OFFLOAD INITIATOR</b>	<b>259</b>
<b>1. Introduction</b>	<b>260</b>
1.1. Hardware Requirements	260
1.2. Software Requirements	261
<b>2. Software/Driver Installation</b>	<b>262</b>
<b>3. Software/Driver Loading</b>	<b>263</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>264</b>
4.1. Configuring Cisco Nexus 5010 and Brocade switch	264
4.2. FCoE fabric discovery verification	264
4.3. Formatting the LUNs and Mounting the Filesystem	267
4.4. Creating Filesystem	268
4.5. Mounting the formatted LUN	269
<b>5. Software/Driver Unloading</b>	<b>270</b>
<b>XXVI. OFFLOAD BONDING</b>	<b>271</b>
<b>1. Introduction</b>	<b>272</b>
1.1. Hardware Requirements	272
1.2. Software Requirements	272
<b>2. Software/Driver Installation</b>	<b>273</b>
<b>3. Software/Driver Loading</b>	<b>274</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>275</b>
4.1. Offloading TCP traffic over a bonded interface	275
<b>5. Software/Driver Unloading</b>	<b>276</b>
<b>XXVII. UDP SEGMENTATION OFFLOAD AND PACING</b>	<b>277</b>
<b>1. Introduction</b>	<b>278</b>
1.1. Hardware Requirements	279
1.2. Software Requirements	279
<b>2. Software/Driver Installation</b>	<b>280</b>
<b>3. Software/Driver Loading</b>	<b>281</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>282</b>
4.1. Modifying the Application	282
4.2. Configuring UDP Pacing	284
4.3. Enabling Offload	285
<b>5. Software/Driver Unloading</b>	<b>286</b>
<b>XXVIII. OFFLOAD IPV6</b>	<b>287</b>

---

---

<b>1. Introduction</b>	<b>288</b>
1.1. Hardware Requirements	288
1.2. Software Requirements	289
<b>2. Software/Driver Installation</b>	<b>290</b>
2.1. Pre-requisites	290
2.2. Installation	290
<b>3. Software/Driver Loading</b>	<b>291</b>
<b>4. Software/Driver Configuration and Fine-tuning</b>	<b>292</b>
<b>5. Software/Driver Unloading</b>	<b>293</b>
5.1. Unloading the NIC Driver	293
5.2. Unloading the TOE Driver	293
<b>XXIX. WD SNIFFING AND TRACING</b>	<b>294</b>
<b>1. Theory of Operation</b>	<b>295</b>
1.1. Hardware Requirements	297
1.2. Software Requirements	297
<b>2. Software/Driver Installation</b>	<b>298</b>
2.1. Pre-requisites	298
2.2. Installation	298
<b>3. Usage</b>	<b>299</b>
3.1. Installing Basic Support	299
3.2. Using Sniffer ( <i>wd_sniffer</i> )	299
3.3. Using Tracer ( <i>wd_tcpdump_trace</i> )	300
<b>XXX. CLASSIFICATION AND FILTERING</b>	<b>301</b>
<b>1. Introduction</b>	<b>302</b>
1.1. Hardware Requirements	302
1.2. Software Requirements	303
<b>2. LE-TCAM Filters</b>	<b>304</b>
2.1. Configuration	304
2.2. Creating Filter Rules	307
2.3. Listing Filter Rules	308
2.4. Removing Filter Rules	308
2.5. Layer 3 Example	309
2.6. Layer 2 Example	310
2.7. Filtering VF traffic	312
<b>3. Hash/DDR Filters</b>	<b>314</b>
3.1. Configuration	314
3.2. Creating Filter Rules	316
3.3. Listing Filter Rules	318
3.4. Removing Filter Rules	319
3.5. Filter Priority	319

---

3.6.	Swap MAC Feature	319
3.7.	Traffic Mirroring	319
3.8.	Packet Tracing and Hit Counters	321
<b>4.</b>	<b>NAT Filtering</b>	<b>328</b>
<b>XXXI. MESH TOPOLOGY</b>		<b>329</b>
<b>1.</b>	<b>Introduction</b>	<b>330</b>
1.1.	Hardware Requirements	330
1.2.	Software Requirements	330
1.3.	Mesh topology	331
<b>2.</b>	<b>Software/Driver Installation</b>	<b>332</b>
<b>3.</b>	<b>Software/Driver Configuration and Fine-tuning</b>	<b>333</b>
<b>XXXII. TRAFFIC MANAGEMENT</b>		<b>334</b>
<b>1.</b>	<b>Introduction</b>	<b>335</b>
1.1.	Hardware Requirements	335
1.2.	Software Requirements	337
<b>2.</b>	<b>Software/Driver Loading</b>	<b>338</b>
<b>3.</b>	<b>Software/Driver Configuration and Fine-tuning</b>	<b>339</b>
3.1.	Traffic Management Rules	339
3.2.	Configuring Traffic Management	341
<b>4.</b>	<b>Usage</b>	<b>344</b>
4.1.	Non-Offloaded Connections	344
4.2.	Offloaded Connections	344
4.3.	Offloaded Connections with Modified Application	345
4.4.	Inline TLS Offload Connections	346
<b>5.</b>	<b>Software/Driver Unloading</b>	<b>347</b>
<b>XXXIII. UNIFIED BOOT</b>		<b>348</b>
<b>1.</b>	<b>Introduction</b>	<b>349</b>
1.1.	Hardware Requirements	349
1.2.	Software Requirements	350
1.3.	Pre-requisites	350
<b>2.</b>	<b>Secure Boot</b>	<b>351</b>
<b>3.</b>	<b>Chelsio T7 Adapter</b>	<b>352</b>
3.1.	Flashing firmware, option ROM and boot.cfg	352
3.2.	Configuring PXE Server	362
3.3.	PXE Boot Process	366
3.4.	OS Installation	370
<b>4.</b>	<b>Unified Boot for T6 Adapter</b>	<b>373</b>
4.1.	Flashing Firmware and Option ROM	373
4.2.	Configuring PXE Server	387

---

---

4.3.	PXE Boot Process	388
4.4.	FCoE Boot Process	396
4.5.	iSCSI Boot Process	408
4.6.	Update Option ROM settings	426
4.7.	iPXE	429
<b>XXXIV.</b>	<b>APPENDIX</b>	<b>435</b>
<b>1.</b>	<b>Limitations</b>	<b>436</b>
<b>2.</b>	<b>Troubleshooting</b>	<b>436</b>
<b>3.</b>	<b>Chelsio End-User License Agreement (EULA)</b>	<b>439</b>

## I. Chelsio Unified Wire

---

# 1. Introduction

Thank you for choosing Chelsio Unified Wire adapters. These high-speed, single-chip, multicore firmware cards provide enterprises and data centers with high-performance solutions for various network and storage-related requirements. Designed to meet the demands of modern workloads, Chelsio adapters offer advanced offloads, scalable throughput, and low latency to enhance performance across diverse applications.

The **Terminator series** represents Chelsio's next generation of highly integrated, hyper-virtualized adapters built around a programmable protocol-processing engine. These Unified Wire Adapters provide full offload support for a complete Unified Wire solution, integrating **NIC, TOE, iWARP, RoCEv2, and iSCSI** functionalities within a single platform. They deliver scalable, true line-rate performance across **10/25/40/50/100/200/400GbE**, efficiently supporting workloads ranging from a single TCP connection to thousands of concurrent connections. Leveraging multiple physical channels within the ASIC, the architecture enables ultra-low latency and high-bandwidth operation while allowing unmodified IP sockets, Fibre Channel, and InfiniBand applications to run simultaneously over Ethernet.

Building on this innovation, the **Chelsio T7 adapter family** provides advanced hardware acceleration, protocol offloads, and scalable throughput to address modern networking demands. The family includes **T7 Storage and DPU Adapters** and **S7 SmartNICs**. The T7 Storage and DPU Adapters and S7 SmartNICs are high-performance Ethernet Unified Wire ASICs available in quad/dual/single-port configurations, supporting **10/25/40/50/100/200/400GbE**, along with **PCIe Gen5** and advanced offload features. In comparison, the Chelsio T6 adapter family supports configurations up to 10/25/40/50/100GbE. The T7 platform sets new benchmarks in bandwidth, latency, CPU offload, and feature integration, making it an ideal solution for Linux-based data centers, storage systems, and high-performance computing environments.

The **T7 Storage and DPU Adapters** have integrated ARM cores and support all port configurations and a full range of offloads, including **NIC, TOE, iWARP, RoCEv2, and iSCSI** functionalities. The **Chelsio S7 SmartNICs** are an Ethernet Unified Wire SmartNIC ASIC optimized for base offloads—including **TOE, RDMA, Crypto, and iSCSI**—using host memory and supporting a wide range of data center networking applications.

The **Chelsio Unified Wire software** is provided in source code format, allowing users to compile the package to generate necessary binaries—an approach recommended when using a custom-built kernel.

This document describes the installation, use, and maintenance of the Unified Wire software and its various components, helping users configure and operate Chelsio adapters to achieve optimal performance in their network and storage environments.

**Disclaimer:** This initial release may contain corner-case and platform-specific issues.

## 1.1. Features

The Chelsio Unified Wire package uses a single command to install various drivers and utilities. It consists of the following software:

- **Network (NIC/TOE)**
- **Virtual Function Network (vNIC)**
- **iWARP RDMA Offload**
- **RoCEv2**
- **NVMe-oF iWARP (Target and Initiator)**
- **NVMe-oF RoCEv2 (Target)**
- **SPDK (user space) NVMe-oF iWARP (Target and Initiator)**
- **NVMe-oF TOE (Target and Initiator)**
- **SPDK (user space) NVMe-oF TOE (Target)**
- **NVMe-oF/TCP PDU Offload (Target and Initiator)**
- **SPDK (user space) NVMe/TCP PDU Offload (Target and Host)**
- **SPDK (user space) NVMe/TCP over Memfree TOE (Target and Initiator)**
- **SoftiWARP Initiator**
- **LIO iSCSI Target Offload**
- **iSCSI PDU Offload Initiator**
- **SPDK (user space) iSCSI PDU Offload (Target and Initiator)**
- **SPDK (user space) iSCSI over Memfree TOE (Target and Initiator)**
- **Crypto Offload**
- **Inline IPsec Offload**
- **iSER (Target and Initiator)**
- **WD-UDP**
- **Data Center Bridging (DCB)**
- **FCoE Full Offload Initiator**
- **Offload Bonding**
- **UDP Segmentation Offload and Pacing**
- **Offload IPV6**
- **WD Sniffing and Tracing**
- **Classification and Filtering**
- **Mesh Topology**
- **Traffic Management feature (TM)**
- **Unified Boot Software**
- **Utility Tools (cop,cxgbtool,t4\_perftune)**

For detailed instructions on loading, unloading, and configuring the drivers/tools, refer to their respective sections.

## 1.2. Hardware Requirements

---

The Chelsio Unified Wire software supports Chelsio Terminator series of Unified Wire adapters. To know more about the list of adapters supported by each driver, refer to the respective sections.

## 1.3. Software Requirements

---

The Chelsio Unified Wire software has been developed to run on 64-bit Linux based platforms and therefore it is a base requirement for running the driver. To know more about the complete list of operating systems supported by each driver, refer to their respective sections.

## 1.4. Package Contents

---

### 1.4.1. Source Package

The Chelsio Unified Wire source package consists of the following files/directories:

- **debrules:** This directory contains packaging specification files required for building Debian packages.
- **docs:** This directory contains support documents - README, Release Notes, and User Guide (this document) for the software.
- **libs:** This directory is for iWARP and WD-UDP libraries. The libibverbs library has an implementation of RDMA verbs which will be used by iWARP applications for data transfers. The librdmacm library works as an RDMA connection manager. The libcxgb4 library works as an interface between the above-mentioned generic libraries and Chelsio iWARP driver. The libcxgb4\_sock library is a LD\_PRELOAD-able library that accelerates UDP Socket communications transparently and without recompilation of the user application.
- **RPM-Manager:** This directory contains support scripts used for cluster deployment.
- **scripts:** Support scripts used by the Unified Wire Installer.
- **specs:** The packaging specification files required for building RPM packages.
- **src:** Source code for different drivers.
- **support:** This directory contains source files for the dialog utility.
- **tools:**
  - **autoconf-x.xx:** This directory contains the source for Autoconf tool needed for iWARP and WD-UDP libraries.
  - **benchmarks:** This directory contains various benchmarking tools to measure throughput and latency of various networks.
  - **chelsio\_adapter\_config:** This directory contains scripts and binaries needed to configure Chelsio adapters.
  - **cop:** The cop tool compiles offload policies into a simple program form that can be loaded into the kernel and interpreted. These offload policies are used to determine

the settings to be used for various connections. The connections to which the settings are applied are based on matching filter specifications. Find more details on this tool in its manual page (run `man cop` command).

- **cudbg**: Chelsio Unified Debug tool which facilitates collection and viewing of various debug entities like register dump, Devlog, CIM LA, etc.
- **cxgbtool**: The `cxgbtool` queries or sets various aspects of Chelsio network interface cards. It complements standard tools used to configure network settings and provides functionality not available through such tools. Find more details on this tool in its manual page (run `man cxgbtool` command).
- **nvme\_utils**: This directory contains `nvmecli`, `nvmetcli` and `targetcli` installation files, and dependent components.
- **t4\_sniffer**: This directory contains sniffer tracing and filtering libraries. See [WD Sniffing and Tracing](#) chapter for more information.
- **90-rdma.rules**: This file contains udev rules needed for running RDMA applications as a non-root user.
- **chdebug**: This script collects operating system environment details and debug information which can be sent to the support team, to troubleshoot Chelsio hardware/software related issues.
- **chiscsi\_set\_affinity.sh**: This shell script is used for mapping iSCSI Worker threads to different CPUs.
- **chsetup**: The `chsetup` tool loads NIC, TOE and iWARP drivers, and creates WD-UDP configuration file.
- **chstatus**: This utility provides status information on any Chelsio NIC in the system.
- **Makefile**: The Makefile for building and installing tools.
- **t4\_latencytune.sh**: Script used for latency tuning of Chelsio adapters.
- **t4\_perftune.sh**: This shell script is to tune the system for higher performance. It achieves it through modifying the IRQ-CPU binding. This script can also be used to change Tx coalescing settings.
- **t4-forward.sh**: RFC2544 Forward test tuning script.
- **uname\_r**: This file is used by `chstatus` script to verify whether the Linux platform is supported or not.
- **wdload**: UDP acceleration tool.
- **wdunload**: Used to unload all the loaded Chelsio drivers.
- **Uboot**: The directory contains Unified Boot Option ROM image (`cubt4.bin`), uEFI driver (`ChelsioUD.efi`), default boot configuration file (`boot.cfg`), and Linux Driver (`cxgb4.ko`) files for supported OSes.
- **install.py, dialog.py**: Python scripts needed for the GUI installer.
- **EULA**: Chelsio's End User License Agreement.
- **install.log**: File containing installation summary.
- **Makefile**: The Makefile for building and installing from the source.

### 1.4.2. RPM Package

The Chelsio Unified Wire RPM package consists of the following:

- **config:** This directory contains firmware configuration files.
- **docs:** This directory contains support documents. That is README, Release Notes, and User Guide (this document) for the software.
- **DRIVER-RPMS:** RPM packages of Chelsio drivers.
- **scripts:** Support scripts used by the Unified Wire Installer.
- **EULA:** Chelsio's End User License Agreement.
- **install.py:** Python script that installs the RPM package. See **Chelsio Unified Wire's Software/Driver Installation** section for more information.
- **uninstall.py:** Python script that uninstalls the RPM package. See **Chelsio Unified Wire's Software/Driver Uninstallation** section for more information.
- **Uboot:** The directory contains Unified Boot Option ROM image (*cbt4.bin*), uEFI driver (*ChelsioUD.efi*), default boot configuration file (*boot.cfg*), and Linux Driver (*cxgb4.ko*) files for supported OSes.

## 2. Hardware Installation

This section consists of the following topics:

- Installing the Chelsio T7 Adapters
- Installing the Chelsio T6 Adapters

### 2.1. Installing the Chelsio T7 Adapters

Follow these steps to install the Chelsio T7 adapter in your system:

1. Shutdown/power off your system.
2. Power off all remaining peripherals attached to your system.
3. Unpack the Chelsio adapter and place it on an anti-static surface.
4. Remove the system case cover as per the system manufacturer's instructions.
5. Remove the PCI filler plate from the slot where you will install the Ethernet adapter.
6. For maximum performance, it is highly recommended to install the adapter into a PCIe x8/x16 slot.
7. Holding the Chelsio adapter by the edges, align the edge connector with the PCI connector on the motherboard. Apply even pressure on both edges until the card is firmly seated. It may be necessary to remove the SFP (transceiver) modules prior to inserting the adapter.
8. Secure the Chelsio adapter with a screw, or other securing mechanism, as described by the system manufacturer's instructions. Replace the case cover.
9. After securing the card, ensure that the card is still fully seated in the PCIE x8/x16 slot as sometimes the process of securing the card causes the card to become unseated.
10. Connect a fiber optic cable to the Chelsio T7 adapter port.
11. Power on your system.
12. Run `update-pciids` command to download the current version of PCI ID list.

```
[root@ ~]# update-pciids
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total     Spent    Left     Speed
100 227k 100 227k    0     0 68592      0  0:00:03  0:00:03 --:--:-- 68610
Done.
```

13. Verify if the adapter was installed successfully by using the `lspci` command.

```
[root@ ~]# lspci | grep -i Chelsio
c7:00.0 Ethernet controller: Chelsio Communications Inc Device 7007
c7:00.1 Ethernet controller: Chelsio Communications Inc Device 7007
c7:00.2 Ethernet controller: Chelsio Communications Inc Device 7007
c7:00.3 Ethernet controller: Chelsio Communications Inc Device 7007
c7:00.4 Ethernet controller: Chelsio Communications Inc Device 7407
c7:00.5 SCSI storage controller: Chelsio Communications Inc Device 7507
c7:00.6 Fibre Channel: Chelsio Communications Inc Device 7607
```

For Chelsio adapters, the physical functions are currently assigned as:

- Physical functions 0 - 3: for the SR-IOV functions of the adapter
- Physical function 4: for all NIC functions of the adapter
- Physical function 5: for iSCSI
- Physical function 6: for FCoE
- Physical function 7: Currently not assigned

Once Unified Wire package is installed and loaded, examine the output of `dmesg` to see if the card is discovered. You should see a similar output:

```
[ 497.356490] cxgb4 0000:16:00.4: Chelsio T72200 rev 1
[ 497.356493] cxgb4 0000:16:00.4: S/N: PT11260163, P/N: 11013067005
[ 497.356494] cxgb4 0000:16:00.4: Firmware version: ██████████
[ 497.356496] cxgb4 0000:16:00.4: Bootstrap version: 2.0.4.0
[ 497.356497] cxgb4 0000:16:00.4: TP Microcode version: 0.1.30.0
[ 497.356498] cxgb4 0000:16:00.4: Expansion ROM version: 3.0.0.5
[ 497.356499] cxgb4 0000:16:00.4: Serial Configuration version: 0x1100002
[ 497.356501] cxgb4 0000:16:00.4: VPD version: 0x2
```

The above outputs indicate the hardware configuration of the adapter and the serial number.

## 2.2. Installing the Chelsio T6 Adapters

---

Follow these steps to install the Chelsio T6 adapter in your system:

1. Shutdown/power off your system.
2. Power off all remaining peripherals attached to your system.
3. Unpack the Chelsio adapter and place it on an anti-static surface.
4. Remove the system case cover as per the system manufacturer's instructions.
5. Remove the PCI filler plate from the slot where you will install the Ethernet adapter.
6. For maximum performance, it is highly recommended to install the adapter into a PCIe x8/x16 slot.
7. Holding the Chelsio adapter by the edges, align the edge connector with the PCI connector on the motherboard. Apply even pressure on both edges until the card is firmly seated. It may be necessary to remove the SFP (transceiver) modules prior to inserting the adapter.
8. Secure the Chelsio adapter with a screw, or other securing mechanism, as described by the system manufacturer's instructions. Replace the case cover.
9. After securing the card, ensure that the card is still fully seated in the PCIE x8/x16 slot as sometimes the process of securing the card causes the card to become unseated.
10. Connect a fiber/twinax cable, multi-mode for short range (SR) optics or single-mode for long range (LR) optics, to the Ethernet adapter or regular Ethernet cable for the 1Gb Ethernet adapter.
11. Power on your system.
12. Run `update-pciids` command to download the current version of PCI ID list

```
[root@ ~]# update-pciids
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total      Spent    Left     Speed
100 227k 100 227k  0    0 68592    0 0:00:03 0:00:03 --:--:-- 68610
Done.
```

13. Verify if the adapter was installed successfully by using the `lspci` command

```
[root@ ~]# lspci | grep -i Chelsio
81:00.0 Ethernet controller: Chelsio Communications Inc T62100-LP-CR Unified Wire Ethernet Controller
81:00.1 Ethernet controller: Chelsio Communications Inc T62100-LP-CR Unified Wire Ethernet Controller
81:00.2 Ethernet controller: Chelsio Communications Inc T62100-LP-CR Unified Wire Ethernet Controller
81:00.3 Ethernet controller: Chelsio Communications Inc T62100-LP-CR Unified Wire Ethernet Controller
81:00.4 Ethernet controller: Chelsio Communications Inc T62100-LP-CR Unified Wire Ethernet Controller
81:00.5 SCSI storage controller: Chelsio Communications Inc T62100-LP-CR Unified Wire Storage Controller
81:00.6 Fibre Channel: Chelsio Communications Inc T62100-LP-CR Unified Wire Storage Controller
```

For Chelsio adapters, the physical functions are currently assigned as:

- Physical functions 0 - 3: for the SR-IOV functions of the adapter
- Physical function 4: for all NIC functions of the adapter
- Physical function 5: for iSCSI
- Physical function 6: for FCoE
- Physical function 7: Currently not assigned

Once Unified Wire package is installed and loaded, examine the output of `dmesg` to see if the card is discovered. You should see a similar output:

```
[ 1119.854346] cxgb4 0000:81:00.4: Chelsio T62100-LP-CR rev 0
[ 1119.854347] cxgb4 0000:81:00.4: S/N: RE41160042, P/N: 11012106003
[ 1119.854348] cxgb4 0000:81:00.4: Firmware version:
[ 1119.854349] cxgb4 0000:81:00.4: Bootstrap version: 255.255.255.255
[ 1119.854350] cxgb4 0000:81:00.4: TP Microcode version: 0.1.23.2
[ 1119.854351] cxgb4 0000:81:00.4: No Expansion ROM loaded
[ 1119.854351] cxgb4 0000:81:00.4: Serial Configuration version: 0x7002000
[ 1119.854352] cxgb4 0000:81:00.4: VPD version: 0x52
[ 1119.854354] cxgb4 0000:81:00.4: Configuration: NIC MSI-X, non-Offload capable
[ 1119.854355] eth0: Chelsio T62100-LP-CR (eth0) 100GBASE-CR4_QSFP
```

The above outputs indicate the hardware configuration of the adapter as well as serial number.

**Note** *Network device names for Chelsio's physical ports are assigned using the following convention: The port farthest from the motherboard appears as the first network interface. For these adapters, the port nearest to the motherboard will appear as the first network interface.*

## 3. Software/Driver Installation

Chelsio Unified Wire package can be installed using source only. The source package supports CLI mode.

The following table describes the various *configuration tuning options* available during installation and drivers/software installed with each option by default:

Configuration Tuning Option	Description	Driver/Software installed
Unified Wire (Default)	Default Configuration. Configures adapters to run all protocols simultaneously.	Network (NIC/TOE), Virtual Function Network (vNIC), iWARP RDMA Offload, RoCEv2, NVMe-oF iWARP (Target and Initiator), NVMe-oF RoCEv2 (Target), SPDK (user space) NVMe-oF iWARP (Target and Initiator), NVMe-oF TOE (Target and Initiator), SPDK (user space) NVMe-oF TOE (Target), NVMe-oF/TCP PDU Offload (Target and Initiator), SPDK (user space) NVMe/TCP PDU Offload (Target and Host), SPDK (user space) NVMe/TCP over Memfree TOE (Target and Initiator)*, SoftiWARP Initiator, LIO iSCSI Target Offload, iSCSI PDU Offload Initiator, SPDK (user space) iSCSI PDU Offload (Target and Initiator)*, SPDK (user space) iSCSI over Memfree TOE (Target and Initiator)*, Crypto Offload, Inline IPsec Offload, iSER (Target and Initiator), WD-UDP, Data Center Bridging (DCB), FCoE Full Offload Initiator, Offload Bonding, UDP Segmentation Offload and Pacing, Offload IPV6, WD Sniffing and Tracing, Classification and Filtering, Mesh Topology, Traffic Management feature (TM), Unified Boot Software, Utility Tools (cop, cxgbtool, t4_perftune)

\* RHEL/Rocky 10.0(6.12.0-55.9.1.el10\_0.x86\_64)/9.6 (5.14.0-570.12.1.el9\_6.x86\_64) is not supported.

### 3.1. Pre-requisites

- Package Manager yum should be configured using any of the OS recommended ways to resolve and install missing packages.
- Install *python3* to run the Chelsio Unified Wire package scripts.
- The *make*, *gcc*, *kernel-devel*, *kernel-headers*, *openssl-devel*, *libibverbs*, *libibverbs-devel*, *librdmacm*, *librdmacm-devel*, *rdma-core-devel*, *cmake*, *libnl3*, *libnl3-devel*, *fuse3*, *fuse3-devel*, *fuse3-libs*, *numactl-devel*, *libuuid-devel*, *libaio-devel*, *ncurses-devel*, *pciutils-devel*, *meson*, *patchelf*, *wheel*, *pyelftools*, and *ninja-build* packages should be installed for the compilation of drivers and utilities.
- Uninstall any OFED present in the machine.
- Installation must be attempted as 'root' user.
- Compilation of drivers can be attempted as non-root user using below command:

```
[user@host ~]$ make KSRC="<kernel source path>" KOBJ="<kernel object path>"
```

OR

```
[user@host ~]$ make KDIR="<kernel directory path>"
```

Example 1:

```
[user@host ChelsioUwire-x.x.x.x]$ make KSRC=/home/linux-5.14.0-570.12.1.el9_6/  
KOBJ=/lib/modules/5.14.0-570.12.1.el9_6.x86_64/build
```

Example 2:

```
[user@host ChelsioUwire-x.x.x.x]$ make KDIR=/usr/src/kernels/linux-6.12.91/
```

Example 3:

```
[user@host ChelsioUwire-x.x.x.x]$ make KSRC=/root/linux-source-6.8.0/  
KOBJ=/lib/modules/6.8.0-110-generic/build
```

## 3.2. Installing Chelsio Unified Wire

### 3.2.1. GUI mode (with Dialog utility)

1. Download the Unified Wire driver package (tarball) from [Chelsio Download Center](#).
2. Extract the downloaded package using the following command:

```
[root@host~]# tar zxvfm <driver_package>.tar.gz
```


3. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```


4. Run the following script to start the GUI installer:

```
[root@host~]# ./install.py
```


5. If **Dialog** utility is present, you can skip to step 6. If not, press **y** to install it when the installer prompts for input.
6. Select **install** under **Choose an action**.

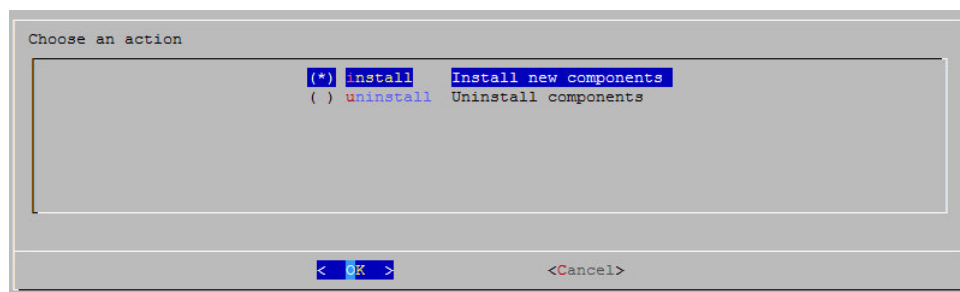

7. Select *Enable IPv6-Offload* to install drivers with IPv6 Offload support or *Disable IPv6-offload* to continue installation without IPv6 offload support.

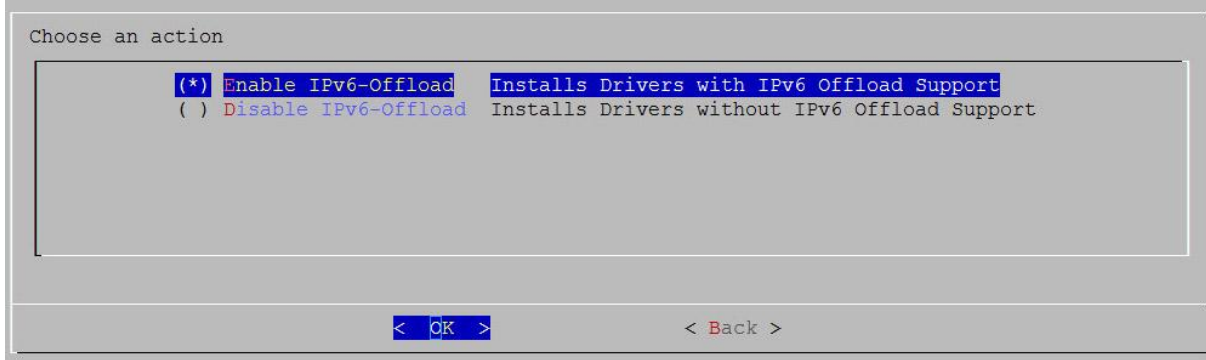


8. Select the required configuration tuning option.

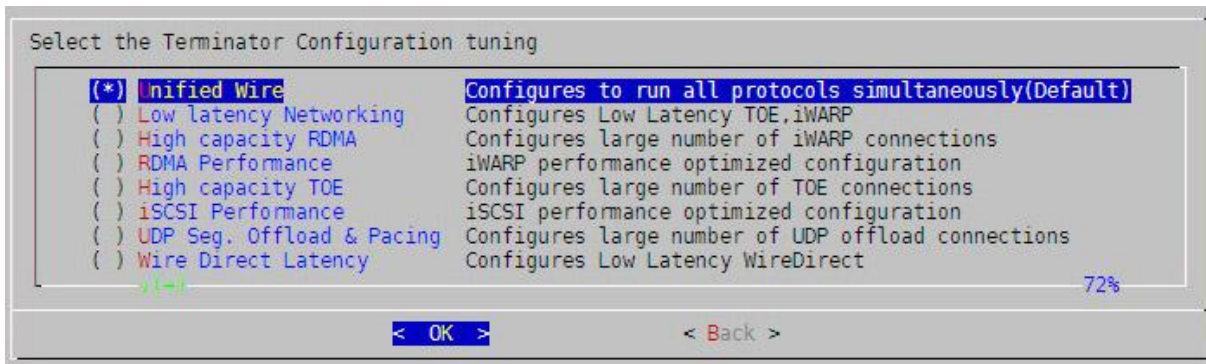

**Note** *The tuning options may vary depending on the Linux distribution.*


9. Under **Choose install components**, select **all** to install all the related components for the option chosen in step 8 or select **custom** to install specific components.

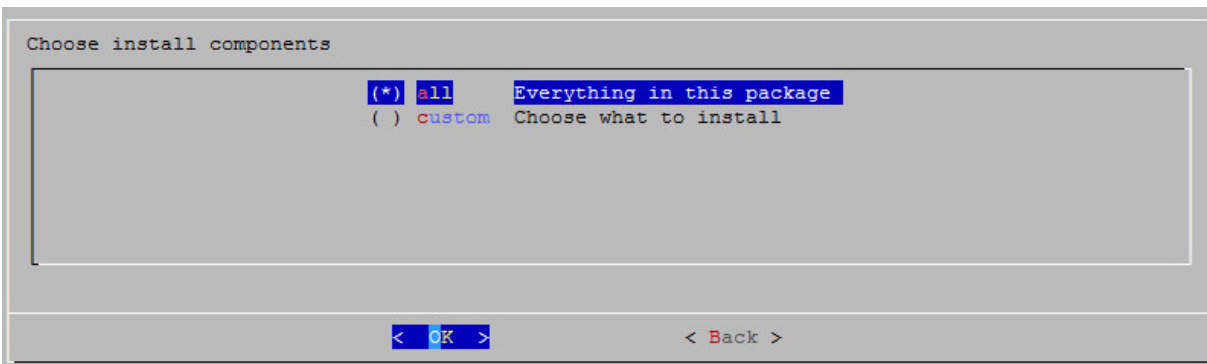

**Important** *To install Crypto Offload, OVS drivers and benchmark tools, select **custom** option.*


10. Select the required performance tuning option.
  - i. Enable Binding IRQs to CPUs: Bind MSI-X interrupts to different CPUs and disable IRQ balance daemon.

- ii. *Retain IRQ balance daemon*: Do not disable IRQ balance daemon.
- iii. *TX-Coalasce*: Write tx\_coal=2 to modprobe.d/conf.

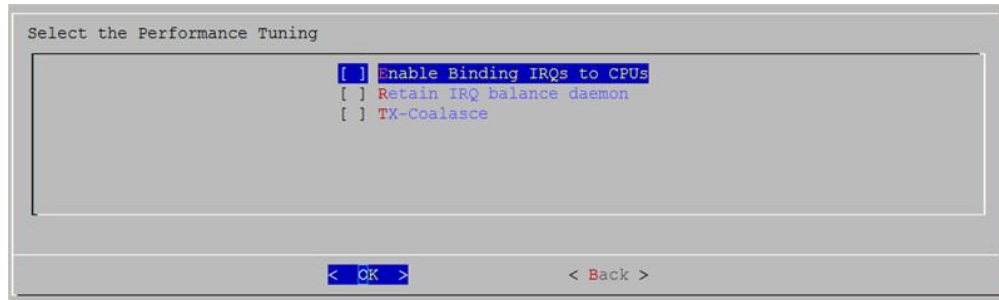


**Note** For more information on the Performance tuning options, refer to the [Performance Tuning](#) section of the **Network (NIC/TOE)** chapter.

11. The selected components will now be installed.

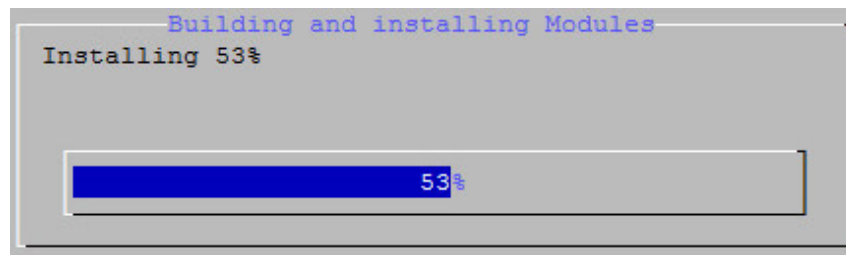

12. After successful installation, a summary of installed components are displayed.

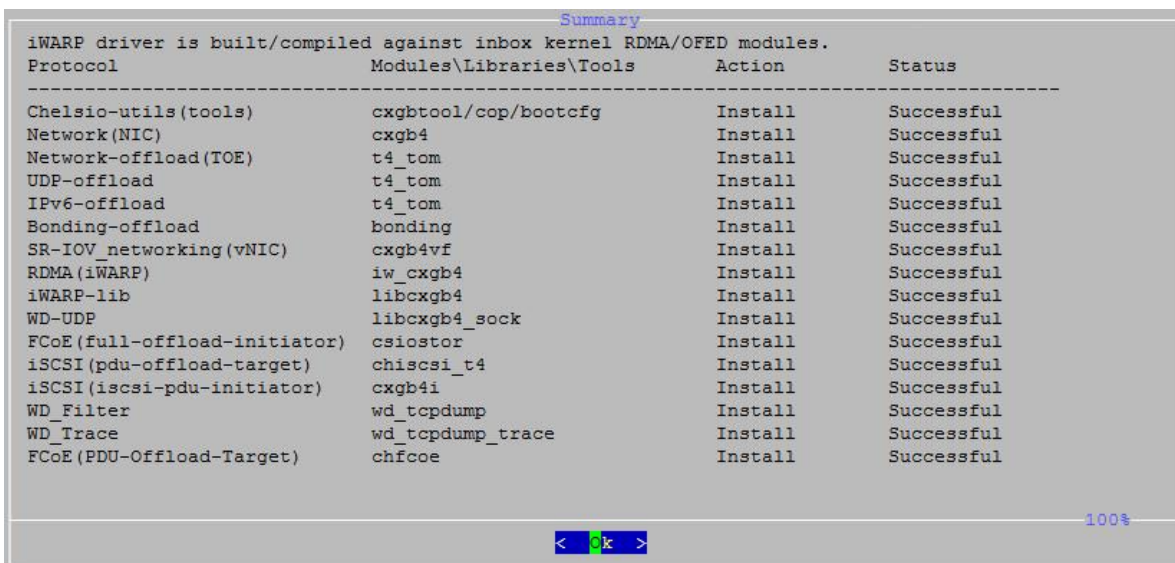

13. Select **View log** to view the installation log or **Exit** to continue.

```
Installation completed successfully. Please reboot the host for the changes to take effect.
To view log messages please refer install.log.

<view log> < Exit >
```

14. Select **Yes** to exit the installer or **No** to go back.

```
Do you want to exit

< Yes > < No >
```

15. Reboot your machine for changes to take effect.

**Note** Press *Esc* or *Ctrl+C* to exit the installer at any point of time.

### 3.2.2. CLI mode (without Dialog utility)

If your system does not have **Dialog** or you choose not to install it, follow the steps mentioned below to install the Unified Wire package:

1. Download the Unified Wire driver package from the [Chelsio Download Center](#).
2. Extract the downloaded package using the following command:

```
[root@host~]# tar zxvfm <driver_package>.tar.gz
```

3. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

4. Run the following script to start the installer.

```
[root@host~]# ./install.py -c <target>
```

5. Enter the number corresponding to the Configuration tuning option in the Input field and press *Enter*.

- The selected components will now be installed.  
After successful installation, press `1` to view the installation log. Press any key to exit from the installer.

**Important** *To customize the installation, view the help by typing*  
`[root@host~]# ./install.py -h`

- Reboot your machine for changes to take effect.

### • iWARP driver installation on Cluster nodes

**Important** *Ensure that you have enabled password less authentication with ssh on the peer nodes for this feature to work.*

Chelsio's Unified Wire package allows installing iWARP drivers on multiple Cluster nodes with a single command. Follow the procedure mentioned below:

- Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

- Create a file (*machinefilename*) containing the IP addresses or hostnames of the nodes in the cluster. You can view the sample file, *sample\_machinefile*, provided in the package to view the format in which the nodes have to be listed.
- Now, execute the following command:

```
[root@host~]# ./install.py -C -m <machinefilename>
```

- Select the required configuration tuning option. The tuning options may vary depending on the Linux distribution.
- Select the required Cluster Configuration.
- The selected components will now be installed.

The above commands will install iWARP (*iw\_cxgb4*) and TOE (*t4\_tom*) drivers on all the nodes listed in the *machinefilename* file.

### 3.2.3. CLI mode

- Download the tarball specific to your operating system and architecture from the [Chelsio Download Center](#).
- Extract the downloaded package. Example, for RHEL/Rocky/AlmaLinux 9.7:

```
[root@host~]# tar zxvfm ChelsioUwire-x.x.x.x-RHEL9.7-x86_64.tar.gz
```

3. Change your current working directory to the Chelsio Unified Wire package directory.


```
[root@host~]# cd ChelsioUwire-x.x.x.x-<OS>-<arch>
```

4. Install Unified Wire.

```
[root@host~]# ./install.py -i <nic_toe/all/udpso/wd/crypto/ovs>
```

Here,

*nic\_toe* : NIC and TOE drivers only  
*all* : All Chelsio drivers  
*udpso* : UDP segmentation offload capable NIC and TOE drivers only  
*wd* : Wire Direct drivers and libraries only  
*crypto* : Crypto drivers and OpenSSL modules.  
*ovs* : OVS modules and NIC driver.

 **Note** *The Installation options may vary depending on the Linux Distribution.*

5. The default configuration tuning option is *Unified Wire*. The configuration tuning can be selected using the following command:


```
[root@host~]# ./install.py -i <Installation mode> -c <configuration_tuning>
```

 **Note** *To view the different configuration tuning options, view the help by typing*

```
[root@host~]# ./install.py -h
```

6. Reboot your machine for changes to take effect.

- **iWARP driver installation on cluster nodes**

 **Important** *Ensure that you have enabled password less authentication with ssh on the peer nodes for this feature to work.*

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x-<OS>-<arch>
```

2. Create a file (*machinefilename*) containing the IP addresses or hostnames of the nodes in the cluster. You can view the sample file, *sample\_machinefile*, provided in the package to view the format in which the nodes have to be listed.

3. Now, execute the following command:

```
[root@host~]# ./install.py -C -m <machinefilename> -i  
<nic_toe/all/udpso/wd> -c <configuration_tuning>
```

The above command will install iWARP (*iw\_cxgb4*) and TOE (*t4\_tom*) drivers on all the nodes listed in the <machinefilename> file.

4. Reboot your machine for changes to take effect.

### 3.3. Firmware flash and init/vpd update

The firmware is installed on the system, typically in `/lib/firmware/cxgb4`, and the driver will auto-load the firmware if an update is required. The kernel must be configured to enable userspace firmware loading support:

#### Device Drivers > Generic Driver Options > Userspace firmware loading support

The firmware version can be verified using *ethtool*.

```
[root@host~]# ethtool -i <iface>
```

#### 3.3.1. Firmware flash and init/vpd update

1. Download the Unified Wire driver package from the [Chelsio Download Center](#).
2. Extract the downloaded package using the following command.

```
[root@host~]# tar zxvfm ChelsioUwire-x.x.x.x.tar.gz
```

3. Change your current working directory to the Chelsio Unified Wire package directory and build and install the drivers, tools and libraries from source.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
[root@host~]# make
[root@host~]# make install
```

**Note** *If a previous version of driver package is installed, execute below commands before attempting installation:*

```
[root@host~]# make uninstall ; make clean
```

4. Flash the updated init and vpd on the Chelsio T7 adapter.

```
[root@host~]# t7seeprom -flash -b <pci-id of chelsio card> write -f:< path
to seeprom.bin file >
```

**Example:**

- For T72200-FH:

```
[root@host~]# t7seeprom -flash -b 11:00.0 write -
f:/lib/firmware/cxgb4/config/
t72200_fh_init_gen5x16_2_mem_2ch_4800_2x200g_vpd_mfg.bin
```

- For T72200:

```
[root@host~]# t7seeprom -flash -b 11:00.0 write -
f:/lib/firmware/cxgb4/config/t72200_init_gen5x16_mem_2ch_4800_2x200g_vpd_mfg
.bin
```

- For T7450:

```
[root@host~]# t7seeprom -flash -b 11:00.0 write -
f:/lib/firmware/cxgb4/config/t7450_init_gen5x16_mem_2ch_4800_4x50g_vpd_mfg.b
in
```

- For S72200:

```
[root@host~]# t7seeprom -flash -b 11:00.0 write -
f:/lib/firmware/cxgb4/config/s72200_init_gen5x16_no_mem_2x200g_vpd_mfg.bin
```

- For S71400:

```
[root@host~]# t7seeprom -flash -b 11:00.0 write -
f:/lib/firmware/cxgb4/config/s71400_init_gen5x16_no_mem_1x400g_vpd_mfg.bin
```

- For S7450:

```
[root@host~]# t7seeprom -flash -b 11:00.0 write -
f:/lib/firmware/cxgb4/config/s7450_init_gen5x16_no_mem_4x40g_vpd_mfg.bin
```

**5. Update the firmware on the Chelsio T7 adapter.**

Run the following commands to update the firmware manually:

```
[root@host~]# rmmmod iw_cxgb4 cxgb4
[root@host~]# modprobe cxgb4 fw_attach=0
[root@host~]# cxgbtool ethX loadfw /lib/firmware/cxgb4/config/t7fwbootstrap-
2.0.4.0.bin
[root@host~]# cxgbtool ethX loadfw /lib/firmware/cxgb4/t7fw.bin
```

**6. Reboot your machine for changes to take effect.**

```
[root@host~]# reboot
```

7. Verify the firmware version after the host boots.

The firmware (v2.1.x.x is installed on the system, typically in `/lib/firmware/cxgb4`. The firmware version can be verified using:

```
[root@host~]# ethtool -i ethX
driver: cxgb4
...
firmware-version: 2.1.x.x,TP 0.1.30.0
```

### 3.4. Mounting debugfs

---

All the driver debug data is stored in debugfs, which will be mounted in most cases. If not, mount it manually.

```
[root@host~]# mount -t debugfs none /sys/kernel/debug
```

### 3.5. Collect all adapter logs using `cudbg_app`

---

To collect all adapter logs using `cudbg_app`, run the following command.

```
[root@host~]# cudbg_app --collect all ethX logs --skip mpstcam
```

---

## 4. Configuring Chelsio Network Interfaces

To effectively test the features of Chelsio adapters, it is recommended to use two machines, each installed with Chelsio's network adapters. These two machines can be connected directly without a switch (back-to-back), or both connected to a switch. The interfaces have to be declared and configured.



*Some operating systems may attempt to auto-configure the detected hardware, and some may not detect all ports on a multi-port adapter. If this happens, refer to the operating system documentation for manually configuring the network device.*

### 4.1. Configuring Chelsio T7 Adapters

T7 Adapters operate at a speed of **10/25/40/50/100/200/400GbE** with optic cables connected to Arista Switches with optics modules.

For the best performance, use JDSU optic module for 10G, Finisar optic module for 25G, SM100G optic module for 100G, and FS.COM optic module for 50G, 200G, and 400G.



*T7 Unified Wire adapters do not support auto-negotiation and FEC.*

### 4.2. Configuring Chelsio T6 Adapters

T6 Unified Wire adapters support auto-negotiation (enabled by default) which allows link parameters like speed, duplex, FEC, and Pause to be negotiated with the PEER.

#### 4.2.1. Setting Speed

T6 100G ports support multiple speeds viz. 100G, 50G, 40G, 25G, 10G, and 1G. T6 25G ports support 25G, 10G, and 1G speeds. The supported speeds can be seen using `ethtool`.



*Ensure that `ethtool` v4.8 or higher is required.*

Below is a sample output for T6 100G port:

```
[root@~]# ethtool enp2s0f4d1
Settings for enp2s0f4d1:
Supported ports: [ FIBRE ]
Supported link modes:  1000baseT/Full
                      10000baseKR/Full
                      40000baseSR4/Full
                      25000baseCR/Full
                      50000baseCR2/Full
                      100000baseCR4/Full

Supported pause frame use: Symmetric
Supports auto-negotiation: Yes
Supported FEC modes: BaseR RS
Advertised link modes:  40000baseSR4/Full
                      25000baseCR/Full
                      50000baseCR2/Full
                      100000baseCR4/Full

Advertised pause frame use: Symmetric
Advertised auto-negotiation: Yes
Advertised FEC modes: None
Link partner advertised link modes:  40000baseSR4/Full
                                    25000baseCR/Full
                                    50000baseCR2/Full
                                    100000baseCR4/Full

Link partner advertised pause frame use: Symmetric
Link partner advertised auto-negotiation: Yes
Link partner advertised FEC modes: RS
Speed: 100000Mb/s
Duplex: Full
Port: Direct Attach Copper
PHYAD: 255
Transceiver: internal
Auto-negotiation: on
Current message level: 0x000000ff (255)
                        drv probe link timer ifdown ifup rx_err tx_err
Link detected: yes
```

- **Optics**

Optics do not support auto-negotiation. Use the following command to change the speed:

```
[root@host~]# ethtool -s <ethX> speed <speed> autoneg off
```

The speed, duplex and FEC (if applicable) should be manually set to the same values on the PEER for the link to come up. For example, to set 25G speed on 100G port:

```
[root@host~]# ethtool -s <ethX> speed 25000 autoneg off
```

- **Twinax**

Twinax cables support auto-negotiation. The following speeds can be set in the *advertise* field.

- Advertise only 100G

```
[root@host~]# ethtool --change <ethX> advertise 0x4000000000
```

- Advertise only 40G

```
[root@host~]# ethtool --change <ethX> advertise 0x2000000
```

- Advertise only 50G

```
[root@host~]# ethtool --change <ethX> advertise 0x400000000
```

- Advertise only 25G

```
[root@host~]# ethtool --change <ethX> advertise 0x80000000
```

- Advertise 100/50/40/25G

```
[root@host~]# ethtool --change <ethX> advertise 0x4482000000
```

- Auto-negotiation OFF

The *advertise* option is only supported with Auto-negotiation enabled. If it is disabled or to set 10G/1G speeds (which do not support Auto-negotiation), use the following command:

```
[root@host~]# ethtool -s <ethX> speed <speed> autoneg off
```

## 4.2.2. Setting FEC

100G, 50G, and 25G speeds support changing Forward Error Correction (FEC). The existing FEC settings can be viewed using,

```
[root@host~]# cxgbtool <ethX> fec
```

Below is a sample output on the T6 100G port:

```
[root@~]# cxgbtool ens1f4 fec
supported:      auto (IEEE 802.3) Base-R/Reed-Solomon Reed-Solomon
IEEE 802.3 'auto': auto (IEEE 802.3) Base-R/Reed-Solomon Reed-Solomon
requested:      auto (IEEE 802.3)
actual:         Reed-Solomon
```

RS FEC is set by default for the T6 port at 100G speed. FEC will be automatically determined with the PEER and the link will come up.

To configure a different FEC, use the below command:

```
[root@host~]# cxgbtool <ethX> fec <value>
```

Here *value* can be:

*rs*: Reed-Solomon FEC

*baser*: Base-R/Reed-Solomon FEC

*auto*: Use standard FEC settings as specified by IEEE 802.3 interpretations of Cable Transceiver Module parameters.

*off*: Turn off FEC

**Important** *RS FEC is not supported on 50G links.*

### 4.2.3. Setting Pause

Pause Autonegotiation is enabled by default. To override it and set Pause parameters, run:

```
[root@host ~]# ethtool -A <ethX> autoneg off tx on rx on
```

### 4.2.4. Spider and QSA Modes

- **T6 Adapters**

Chelsio T6 100G adapters can be configured in the following two modes:

- 2X100Gbps: This is the default mode of operation where each port functions as 100Gbps link. The port farthest to the motherboard appears as the first network interface (Port 0).
- 2X25Gbps (Spider): In this mode, port 0 functions as two 25Gbps links and port 1 is disabled.

**Note** *QSA modules work in the default mode.*

To configure/change the mode of operation, use the following procedure:

1. Run the `chelsio_adapter_config.py` command to detect all the Chelsio adapter(s) present in system. Select the adapter to configure by specifying the adapter index.

```
[root@~]# chelsio_adapter_config.py
Chelsio adapter detected

|-----|
| Choose Chelsio card: |
| 1. T62100_LP_CR  2:0.0 |
| 2. T520_LL_CR   3:0.0 |
|-----|
Select card: 1
```

2. Select *Change adapter mode*.

```
Card T62100_LP_CR(2:0.0) selected

-----|
| Choose option |
| 1. Change to Default settings |
| 2. Change T62100 mode |
|-----|
Select option: 2
```

3. Select the required mode.

```
Changing T62100 mode

-----|
| Possible Chelsio adapter modes: |
| 1: Spider(2x25G ) |
|-----|
Spider mode (2x25G ) selected
```

4. Reload the network driver to make the changes.

```
[root@host~]# rmmod cxgb4
[root@host~]# modprobe cxgb4
```

**Note** *If the default option is selected in step 2, reboot the machine to apply the changes.*

## 4.3. Configuring NetworkManager keyfiles

A typical interface NetworkManager keyfiles (Example: enp3s0f4) on RHEL 9.X looks like the following:

```
# cat /etc/NetworkManager/system-connections/enp3s0f4.nmconnection
[connection]
id=enp3s0f4
uuid=a52c3985-3fc3-41cd-bec0-77c19fab5cae
type=ethernet
autoconnect=true
interface-name=enp3s0f4
timestamp=1740991901

[ethernet]
mac-address=00:07:43:3d:d9:e0

[ipv4]
address1=103.1.1.77/24
method=manual

[ipv6]
addr-gen-mode=eui64
dhcp-timeout=90
method=link-local
```

In the case of DHCP addressing use the below template:

```
# cat /etc/NetworkManager/system-connections/enp3s0f4.nmconnection
[connection]
id=enp3s0f4
uuid=a52c3985-3fc3-41cd-bec0-77c19fab5cae
type=ethernet
autoconnect=true
interface-name=enp3s0f4
timestamp=1740991901

[ethernet]
mac-address=00:07:43:3d:d9:e0

[ipv4]
method=auto

[ipv6]
addr-gen-mode=eui64
dhcp-timeout=90
method=link-local
```

## 4.4. Creating Network Manager keyfiles manually

To spot the new interfaces, ensure the driver is unloaded first. To that point `ifconfig -a | grep HWaddr` should display all Non-Chelsio interfaces whose drivers are loaded, whether the interfaces are up or not.

```
[root@host~]# ifconfig -a | grep HWaddr
eth0 Link encap:Ethernet HWaddr 00:30:48:32:6A:AA
```

Then load the driver using the `modprobe cxgb4` command (for the moment it does not make any difference whether we are using NIC-only or the TOE-enabling driver). The output of `ifconfig` must display the adapter interfaces as:

```
[root@host~]# ifconfig -a | grep HWaddr
eth0 Link encap:Ethernet HWaddr 00:30:48:32:6A:AA
enp3s0f4 Link encap:Ethernet HWaddr 00:07:43:3D:D9:E0
enp3s0f4d1 Link encap:Ethernet HWaddr 00:07:43:3D:D9:E8
```

For each interface you can write a configuration file in `/etc/NetworkManager/system-connections`. The `enp3s0f4.nmconnection` could look like:

```
# cat /etc/NetworkManager/system-connections/enp3s0f4.nmconnection
[connection]
id=enp3s0f4
uuid=a52c3985-3fc3-41cd-bec0-77c19fab5cae
type=ethernet
```

```
autoconnect=true
interface-name=enp3s0f4
timestamp=1740991901

[ethernet]
mac-address=00:07:43:3d:d9:e0

[ipv4]
address1=103.1.1.77/24
method=manual

[ipv6]
addr-gen-mode=eui64
dhcp-timeout=90
method=link-local
```

Reload and bring up:

```
# nmcli connection reload
# nmcli connection up enp3s0f4
```

## 4.5. Configuring IPv6

---

The interfaces should come up with a link-local IPv6 address for complete and fully functional IPv6 configuration. Update the Interface NetworkManager keyfile with *method=link-local*.

## 4.6. Checking Link

---

Once the NetworkManager keyfiles are created for the interfaces you should check the link. That is, ensure it is actually connected to the network. First, bring up the interface you want to test using `ifup eth1`.

You should now be able to ping any other machine from your network provided it has ping response enabled.

## 5. Performance Tuning

The following section lists the steps to tune the system for optimal performance.

### 5.1. Generic

- Install the T6 adapter into a PCIe Gen3 x8/x16 slot. Ensure that **T7 400GbE adapters** are placed in PCIe **Gen5 x16** slots and not in x8\_in\_x16 slots.
- Ensure that the system is populated with the balanced memory configuration (Refer to the system manual for the recommended configurations). At least one DIMM per channel should be populated for maximum performance.
- Make sure the following BIOS settings are configured:
  1. Disable Hyper-Threading Technology.
  2. Disable Sub-NUMA Clustering (SNC).
  3. Disable virtualization, C-states technology, VT-d, Intel I/O AT, and SR-IOV.
  4. Disable CPU Power Management Features including C-states, P-states, and Turbo Boost.
  5. Configure System power management profile in Maximum Performance Mode.
- Turn off *irqbalance*.

```
[root@host~]# /etc/init.d/irqbalance stop
```

(or)

```
[root@host~]# systemctl stop irqbalance.service
```

### 5.2. Throughput

In addition to the generic settings,

- Add *intel\_pstate=disable processor.max\_cstate=1 intel\_idle.max\_cstate=0* to the kernel command line to prevent the system from entering power-saving/idle states and avoid CPU frequency changes.
- Set the below tuned-adm profile:

```
[root@host~]# tuned-adm profile network-throughput
```

## 5.3. Latency

---

In addition to the generic settings,

- Disable Hyperthreading in BIOS.
- Add *idle=poll* to the kernel command line.
- Disable SELinux.
- Set the below tuned-adm profile:

```
[root@host~]# tuned-adm profile network-latency
```

- Set sysctl param *net.ipv4.tcp\_low\_latency* to 1.

```
[root@host~]# sysctl -w net.ipv4.tcp_low_latency=1
```

To optimize your system for different protocols, refer to their respective chapters.

## 6. Software/Driver Update

For any distribution-specific problems, check **README** and **User Guide** (this document) included in the release for possible workarounds.

Visit the [Chelsio Download Center](#) for regular updates on various software/drivers. You can also subscribe to our newsletter for the latest software updates.

## 7. Software/Driver Uninstallation

Similar to installation, the Chelsio Unified Wire package can be uninstalled using the source code. By using the source, you can uninstall the package using the CLI mode.

### 7.1. Uninstalling Chelsio Unified Wire from source

---

#### 7.1.1. CLI mode

1. Change your current working directory to the *Chelsio Unified Wire package* directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Uninstall using the following command:

```
[root@host~]# make uninstall
```

## II. Network (NIC/TOE)

# 1. Introduction

Chelsio's Unified Wire adapters provide extensive support for NIC operation, including all stateless offload mechanisms for both IPv4 and IPv6 (IP, TCP, and UDP checksum offload, LSO - Large Send Offload aka TSO - TCP Segmentation Offload, and assist mechanisms for accelerating LRO - Large Receive Offload).

A high-performance fully offloaded and fully featured TCP/IP stack meets or exceeds software implementations in RFC compliance. Chelsio's Terminator engine provides unparalleled performance through a specialized data flow processor implementation and a host of features designed for high throughput and low latency in demanding conditions and networking environments. TCP offload is fully implemented in the hardware, thus freeing the CPU from TCP/IP overhead. The freed-up CPU resources can be used for other computing tasks. The TCP offload in turn removes network bottlenecks and enables applications to take full advantage of the networking capabilities.

## 1.1. Hardware Requirements

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
  - S71400
  - S72200
  - S7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T62100-SO-CR
  - T62100-SO-OCP3
  - T6225-CR
  - T6225-SO-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR
  - T520-SO-CR



*The S71400, S72200, S7450, T62100-SO-CR, T62100-SO-OCP3, T6225-SO-CR, and T520-SO-CR adapters support only NIC functionality.*

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- Kernel.org linux-6.6.141
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Software/Driver Installation

Change your current working directory to the Chelsio Unified Wire package directory.


```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

- To build and install NIC only driver (without offload support),

```
[root@host~]# make nic_install
```

- To build and install drivers with offload support,

```
[root@host~]# make toe_install
```

 **Note** For more installation options, run `make help` or `install.py -h`.

Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 3. Software/Driver Loading

**Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

The driver must be loaded by the *root* user. Any attempt to load the driver as a regular user will fail.

### 3.1. Loading in NIC mode (without full offload support)

To load the Network driver without full offload support,

```
[root@host~]# modprobe cxgb4
```

### 3.2. Loading in TOE mode (with full offload support)

To enable full offload support,

```
[root@host~]# modprobe t4_tom
```

**Note** *Offload support needs to be enabled upon each reboot of the system. This can be done manually as shown above.*

```
[root@host~]# modprobe t4_tom vmdirectio=1
```

## 4. Software/Driver Configuration

### 4.1. Enabling TCP Offload

Load the offload drivers and bring up the Chelsio interface.

```
[root@host~]# modprobe t4_tom
[root@host~]# ifconfig ethX <IP> up
```

All TCP traffic will be now offloaded over the Chelsio interface. To see the number of connections offloaded, run the following command:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<bus-id>/tids
```

```
[root@ ~]# cat /sys/kernel/debug/cxgb4/0000\:01\:00.4/tids
Connections in use: 8
TID range: 0..959/2048..18431, in use: 0/8
STID range: 960..1455, in use-IPv4/IPv6: 0/0
ATID range: 0..8191, in use: 0
FTID range: 1472..1967
UOTID range: 18432..19455, in use: 0
HW TID usage: 8 IP users, 0 IPv6 users
```

Where,

*TID* is the number of offload connections.

*STID* is the number of offload servers.

### 4.2. VXLAN Offload

Virtual Extensible LAN (VXLAN) is a network virtualization technique that uses overlay encapsulation protocol to provide Ethernet Layer 2 network services with extended scalability and flexibility. VXLAN extends the virtual LAN (VLAN) address space by adding a 24-bit segment ID and increasing the number of available logical networks from 4096 to 16 million. Thereby addressing the scalability and network segmentation issues associated with large cloud computing deployments. Chelsio adapters are uniquely capable of offloading the processing of VXLAN encapsulated frames such that all stateless offloads (checksums and TSO) are preserved, resulting in significant performance benefits. This is enabled by default when loading the driver.

### 4.2.1. Host Configuration

1. Load the network driver and vxlan driver.

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe vxlan
```

2. Configure larger MTU on the Chelsio interface to accommodate the larger frame size due to VXLAN encapsulation. Assign IP address and bring it up.

```
[root@host~]# ifconfig <interface> <IP address> mtu 1600 up
```

3. Create the VXLAN interface, with the required VNI, multicast group, port number, and flags.

#### IPv4

```
[root@host~]# ip link add <vxlan_interface> type vxlan id <vni> group  
239.1.1.1 dev <interface> dstport 4789 noudpcsum
```

#### IPv6

```
[root@host~]# ip link add <vxlan_interface> type vxlan id <vni> group  
ff08::114 dev <interface> dstport 4789 udp6zerocsumtx udp6zerocsumrx
```

4. Bring up the VXLAN interface.

```
[root@host~]# ifconfig <vxlan_interface> up
```

5. Create the bridge interface and bring it up.

```
[root@host~]# brctl addbr <bridge_interface>  
[root@host~]# ifconfig <bridge_interface> up
```

6. Add the VXLAN interface to the bridge interface.

```
[root@host~]# brctl addif <bridge_interface> <vxlan_interface>
```

7. Tx UDP Tunnel Segmentation Offload will be enabled by default when loading the network driver. To see the current settings,

```
[root@host~]# ethtool -k <interface>  
...  
tx-udp_tnl-segmentation: on
```

8. For better performance, configure the NIC settings of the [Performance Tuning](#) section.

## 4.2.2. Guest (VM) Configuration

1. Open the Virtual Machine Manager.

```
[root@host~]# virt-manager
```

2. Add a Virtual Network Interface to the VM, by specifying the Bridge name configured in Step 5. of the Host Configuration section and Device Model as *virtio*.

3. Bring up the Virtual Network interface with the required IP address.

```
[root@host~]# ifconfig <virtual-interface> <IP address> up
```

For better performance, the following settings are recommended:

1. Increase the number of queues for the Virtual network interface to 8.

```
[root@host~]# virsh edit <VM>
</interface>
<interface type='bridge'>
  <mac address='52:54:00:34:8a:4a' />
  <source bridge='br0' />
  <model type='virtio' />
  <driver name='vhost' queues='8' />
</interface>
```

2. Map the Virtual CPUs of the VM to physical CPUs which will be free.  
*Example:* On a machine with 16 cores, VM Virtual CPUs were pinned to physical cores 8-15, leaving cores 0-7 to be utilized by the host.

```
[root@host~]# virsh edit <VM>
  <vcpu placement='static' cpuset='8-15'>8</vcpu>
</vcpu>
```

3. Restart the libvirtd services and Virtual Machine Manager.


```
[root@host~]# systemctl restart libvirtd.service
[root@host~]# systemctl restart libvirt-guests.service
[root@host~]# virt-manager
```

4. Bind the Virtual Network Interface Queues to different CPUs.

5. Increase the TCP buffers by configuring the [sysctl variables](#) mentioned in NIC settings of the **Performance Tuning** section.

### 4.3. HMA

To use HMA, ensure that Unified Wire is installed using the *Unified Wire (Default)* configuration tuning option. Currently, 256 IPv4/128 IPv6 TOE connections are supported on T6 25G SO adapters.

 **Note** *The HMA feature is applicable only for T6 adapters.*

The following image shows the HMA reserved memory.

```
[root@ ~]# cat /sys/kernel/debug/cxgb4/0000\:05\:00.4/meminfo
EDCO: 0x0-0x3ffff [4.00 MiB]
EDC1: 0x400000-0x7ffff [4.00 MiB]
HMA: 0x800000-0x63ffff [92.0 MiB]
```

The following image shows the number of TOE offloaded connections.

```
[root@ ~]# cat /sys/kernel/debug/cxgb4/0000\:02\:00.4/tids
Connections in use: 256
TID range: 64..319, in use: 256
STID range: 320..383, in use-IPv4/IPv6: 0/0
ATID range: 0..127, in use: 0
FTID range: 384..879
HPFTID range: 0..63
HW TID usage: 256 IP users, 0 IPv6 users
```

### 4.4. Performance Tuning

Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.

- **TOE**
  1. Run the performance tuning script to update few kernel parameters using sysctl and map TOE queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

2. Disable Rx Coalesce and DDP using the following steps:
  - a. Create a COP policy.

```
[root@host~]# cat <policy_file>
all => offload !ddp !coalesce
```

b. Compile the policy.

```
[root@host~]# cop -d -o <policy_out> <policy_file>
```

c. Apply the policy.

```
[root@host~]# cxgbtool ethX policy <policy_out>
```

**Note** *The policy applied using cxgbtool is not persistent and should be applied every time drivers are reloaded, or the machine is rebooted.*

The applied cop policies can be read using,

```
[root@host~]# cat /proc/net/offload/toeX/read-cop
```

- **NIC**

1. Run the performance tuning script to update few kernel parameters using sysctl and map NIC queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

2. Enable adaptive-rx.

```
[root@host~]# ethtool -C enp2s0f4 adaptive-rx on
```

- **NIC Latency**

Enable BUSY\_POLL feature.

```
[root@host~]# sysctl -w net.core.busy_poll=50  
[root@host~]# sysctl -w net.core.busy_read=50
```

- **TOE Latency**

Set the below sysctl:

```
[root@host~]# sysctl -w toe.toeX_tom.recvmsg_spin_us=50
```

- **Receiver Side Scaling (RSS)**

The Receiver Side Scaling (RSS) enables the receiving network traffic to scale with the available number of processors on a modern networked computer. RSS enables parallel receive processing and dynamically balances the load among multiple processors. Chelsio's network controller fully supports Receiver Side Scaling for IPv4 and IPv6.

This script first determines the number of CPUs on the system and then each receiving queue is bound to an entry in the system interrupt table and assigned to a specific CPU. Thus, each receiving queue interrupts a specific CPU through a specific interrupt now. For example, on a 4-core system, `t4_perftune.sh` gives the following output:

```
[root@host~]# t4_perftune.sh
Discovering Chelsio T4/T5/T6 devices ...
Configuring Chelsio T4/T5/T6 devices ...
Tuning eth7
IRQ table length 4
Writing 1 in /proc/irq/62/smp_affinity
Writing 2 in /proc/irq/63/smp_affinity
Writing 4 in /proc/irq/64/smp_affinity
Writing 8 in /proc/irq/65/smp_affinity
eth7 now up and tuned
...
```

Because there are 4 CPUs on the system, 4 entries of interrupts are assigned. For other network interfaces, you should see a similar output message.

Now the receiving traffic is dynamically assigned to one of the system's CPUs through a Terminator queue. This achieves a balanced usage among all the processors. This can be verified, for example, by using the **iperf** tool. First set up a server on the receiver host.

```
[root@receiver_host~]# iperf -s
```

Then on the sender host, send data to the server using the iperf client mode. To emulate a moderate traffic workload, use `-P` option to request 20 TCP streams from the server.

```
[root@sender_host~]# iperf -c receiver_host_name_or_IP -P 20
```

Then on the receiver host, look at the interrupt rate at `/proc/interrupts`:

```
[root@receiver_host~]# cat /proc/interrupts | grep eth6
```

Id	CPU0	CPU1	CPU2	CPU3	type	interface
36:	115229	0	0	1	PCI-MSI-edge	eth6 (queue 0)
37:	0	121083	1	0	PCI-MSI-edge	eth6 (queue 1)
38:	0	0	105423	1	PCI-MSI-edge	eth6 (queue 2)
39:	0	0	0	115724	PCI-MSI-edge	eth6 (queue 3)

Now interrupts from eth6 are evenly distributed among the 4 CPUs.

Without Terminator's RSS support, the interrupts caused by network traffic may be distributed unevenly over CPUs. For your information, the traffic produced by the same iperf commands gives the following output in `/proc/interrupts`.

```
[root@receiver_host~]# cat /proc/interrupts | grep eth6
```

Id	CPU0	CPU1	CPU2	CPU3	type	interface
36:	0	9	0	17418	PCI-MSI-edge	eth6 (queue 0)

37:	0	0	21718	2063	PCI-MSI-edge	eth6 (queue 1)
38:	0	7	391519	222	PCI-MSI-edge	eth6 (queue 2)
39:	1	0	33	17798	PCI-MSI-edge	eth6 (queue 3)

Here there are 4 receiving queues from the eth6 interface, but they are not bound to a specific CPU or interrupt entry. Queue 2 has caused a very large number of interrupts on CPU2 while CPU0 and CPU1 are barely used by any of the four queues. Enabling RSS is thus essential for best performance.

**Note** *Linux's `irqbalance` may take charge of distributing interrupts among CPUs on a multiprocessor platform. However, `irqbalance` distributes interrupt requests from all hardware devices across processors. For a server with Chelsio network card constantly receiving large volume of data at 10/25/40/50/100/200/400 Gbps, the network interrupt demands are significantly high. Under such circumstances, it is necessary to enable RSS to balance the network load across multiple processors and achieve the best performance.*

- **Interrupt Coalescing**

The idea behind Interrupt Coalescing (IC) is to avoid flooding the host CPUs with too many interrupts. Instead of throwing one interrupt per incoming packet, IC waits for 'n' packets to be available in the Rx queues and placed into the host memory through DMA operations before an interrupt is thrown, reducing the CPU load and thus improving latency. It can be changed using the following command:

```
[root@host~]# ethtool -C ethX rx-frames n
```

**Note** *For more information, run the following command:*

```
[root@host~]# ethtool -h
```

- **Generic Receive Offload**

Generic Receive Offload (GRO) is a performance improvement feature at the receiving side. It aggregates the received packets that belong to the same stream and combines them to form a larger packet before pushing them to the receive host network stack. By doing this, rather than processing every small packet, the receiver CPU works on fewer packet headers but with the same amount of data. This helps to reduce the receive host CPU load and improve throughput in a 10/25/40/50/100/200/400Gb network environment where CPU can be the bottleneck. It is available from kernel 2.6.29 onwards.

Chelsio's card supports both hardware assisted GRO and Linux-based GRO. `t4_tom` is the kernel module that enables the hardware assisted GRO. If it is not already in the kernel module list, use the following command to insert it:

```
[root@host~]# lsmod | grep t4_tom
[root@host~]# modprobe t4_tom
[root@host~]# lsmod | grep t4_tom
t4_tom 88378 0 [permanent]
toecore 21618 1 t4_tom
cxgb4 225342 1 t4_tom
```

Then, Terminator's hardware GRO implementation is enabled.

If you would like to use the Linux GRO for any reason, first the `t4_tom` kernel module needs to be removed from kernel module list. Note that you might need to reboot your system. After removing the `t4_tom` module, you can use `ethtool` to check the status of the current GRO settings.

```
[root@host~]# ethtool -k eth6
Offload parameters for eth6:
rx-checksumming: on
tx-checksumming: on
scatter-gather: on
tcp-segmentation-offload: on
udp-fragmentation-offload: off
generic-segmentation-offload: on
generic-receive-offload: on
large-receive-offload: off [fixed]
```

Note that `generic-receive-offload` option is ON. This means GRO is enabled. When GRO is enabled, Chelsio's driver provides the following GRO-related statistics:

```
[root@host~]# ethtool -S eth6
...
GROPackets : 0
GROMerged : 897723
...
```

`GROPackets` is the number of held packets. Those are candidate packets held by the kernel to be processed individually or to be merged into larger packets. By default, this number is zero.

`GROMerged` is the number of packets that are merged to larger packets. Usually, this number increases if there is any continuous traffic stream present.

`ethtool` can also be used to switch off the GRO options when necessary.

```
[root@host~]# ethtool -K eth6 gro off
[root@host~]# ethtool -k eth6
Offload parameters for eth6:
rx-checksumming: on
tx-checksumming: on
scatter-gather: on
```

## Network (NIC/TOE)

---

```
tcp-segmentation-offload: on
udp-fragmentation-offload: off
generic-segmentation-offload: on
generic-receive-offload: off
large-receive-offload: off [fixed]
```

The output above shows a disabled GRO.

Note that if your Linux system has IP forwarding enabled. That is acting as a bridge or router, the GRO needs to be disabled. This is due to a known kernel issue.

## 5. Software/Driver Unloading

### 5.1. Unloading the NIC Driver

To unload the NIC driver,

```
[root@host~]# rmmod cxgb4
```

### 5.2. Unloading the TOE Driver

A reboot is required to unload the TOE driver. To avoid rebooting, follow the steps below:

1. Load *t4\_tom* driver with the *unsupported\_allow\_unload* parameter.

```
[root@host~]# modprobe t4_tom unsupported_allow_unload=1
```

2. Stop all the offloaded traffic, servers, and connections. Check for the reference count.

```
[root@host~]# cat /sys/module/t4_tom/refcnt
```

If the reference count is 0, the driver can be directly unloaded. Skip to step 3.

If the count is non-zero, load a COP policy which disables offload using the following procedure:

- a. Create a policy file which disables offload.

```
[root@host~]# cat policy_file  
all => !offload
```

- b. Compile and apply the output policy file.

```
[root@host~]# cop -o no-offload.cop policy_file  
[root@host~]# cxgbtool ethX policy no-offload.cop
```

3. Unload the driver.

```
[root@host~]# rmmod t4_tom  
[root@host~]# rmmod toecore  
[root@host~]# rmmod cxgb4
```

## III. Virtual Function Network (vNIC)

---

# 1. Introduction

The ever-increasing network infrastructure of IT enterprises has led to a phenomenal increase in maintenance and operational costs. IT managers are forced to acquire more physical servers and other data center resources to satisfy storage and network demands. To solve the Network and I/O overhead, users are opting for server virtualization which consolidates I/O workloads onto lesser physical servers thus resulting in efficient, dynamic, and economical data center environments. Other benefits of Virtualization include improved disaster recovery, server portability, cloud computing, Virtual Desktop Infrastructure (VDI), etc.

Chelsio's Unified Wire family of adapters deliver increased bandwidth, lower latency, and lower power with virtualization features to maximize cloud scaling and utilization. The adapters also provide full support for PCI-SIG SR-IOV to improve I/O performance on a virtualized system. Users can configure up to 64 Virtual and 8 Physical functions (with 4 PFs as SR-IOV capable) along with 336 virtual MAC addresses.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T62100-SO-CR
  - T62100-SO-OCP3
  - T6225-CR
  - T6225-SO-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR
  - T520-SO-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Virtual Function Network driver is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

# 1. Software/Driver Installation

The Virtual Function implementation for Chelsio adapters comprises of two modules:

- Standard NIC driver module, *cxgb4*, which runs on base Hypervisor and is responsible for instantiation and management of the PCIe Virtual Functions (VFs) on the adapter.
- VF NIC driver module, *cxgb4vf*, which runs on Virtual Machine (VM) guest OS using VFs **attached** through Hypervisor VM initiation commands.

## 1.1. Pre-requisites

Ensure that the following requirements are met before driver installation:

- PCI Express Slot should be ARI capable.
- SR-IOV should be enabled in the machine.
- Intel Virtualization Technology for Directed I/O (VT-d) should be enabled in the BIOS.
- Add *intel\_iommu=on* to the kernel command line in grub/grub2 menu, to use VFs in VMs.

## 1.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. On the host, install network driver.

```
[root@host~]# make nic_install
```

3. On the guest (VM), install vNIC driver.

```
[root@host~]# make vnic_install
```

 **Note** For more installation options, run `make help` or `install.py -h`.

4. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 2. Software/Driver Loading

### 2.1. Instantiate Virtual Functions (SR-IOV)

To instantiate Virtual Functions (VFs) on the host, run the following commands:

```
[root@host~]# modprobe cxgb4
[root@host~]# echo n >
/sys/class/net/ethX/device/driver/<bus_id>/sriov_numvfs
```

Here, *ethX* is the interface and *n* specifies the number of VFs to be instantiated per physical function (*bus\_id*). VFs can be instantiated only from PFs 0 - 3 of the Chelsio adapter. A maximum of 64 virtual functions can be instantiated with 16 virtual functions per physical function.

*Example:* Instantiating 16 VFs on PF3 of Chelsio adapter.

```
[root@ ~]# modprobe cxgb4
[root@ ~]# echo 16 > /sys/class/net/eth0/device/driver/0000\:06\:00.3/sriov_numvfs
[root@ ~]#
```

**Note** *To get familiar with physical and virtual function terminologies, refer to the **PCI Express specification**.*

Unload the vNIC driver on the host (if loaded).

```
[root@host~]# rmmod cxgb4vf
```

The virtual functions can now be assigned to virtual machines (guests).

### 2.2. Loading the Driver

**Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4
libcxgbi libcxgb
```

The vNIC driver must be loaded on the Guest OS by the root user. Any attempt to load the driver as a regular user will fail.

To load the driver, run the following command:

```
[root@host~]# modprobe cxgb4vf
```

## 3. Software/Driver Configuration and Fine-tuning

### 3.1. VF Communication

Once the VF driver (*cxgb4vf*) is loaded in the VM and the VF interface is up with an IP address, it can communicate (send/receive network traffic).

```
[root@host~]# modprobe cxgb4vf
[root@host~]# ifconfig ethX <IP Address> up
```

#### 2-port card

VFs of PF0 and PF2 can communicate with each other and with hosts connected to Port 0.  
VFs of PF1 and PF3 can communicate with each other and with hosts connected to Port 1.

#### 4-port card

VFs of PF0 can communicate with each other and with hosts connected to Port 0.  
VFs of PF1 can communicate with each other and with hosts connected to Port 1.  
VFs of PF2 can communicate with each other and with hosts connected to Port 2.  
VFs of PF3 can communicate with each other and with hosts connected to Port 3.

By default, the VFs (in VM) can not communicate with PFs (on Host). To enable this communication, set ethtool private flag *port\_tx\_vm\_wr* for PF interface (on Host).

```
[root@host~]# ethtool --set-priv-flags ethX port_tx_vm_wr on
```

#### Example:

- 1 VF was instantiated on PF0.

```
[root@host~]# modprobe cxgb4
[root@host~]# echo 1 >
/sys/class/net/eth1/device/driver/0000\:01\:00.0/sriov_numvfs
[root@host~]# rmmod cxgb4vf
```

2. The ethtool private flag was set on the Host and PF interface was brought up on the Host.

```
[root@host~]# ethtool --set-priv-flags eth1 port_tx_vm_wr on
[root@host~]# ifconfig eth1 10.1.1.2/24 up
```

3. VF was assigned to a VM. VF was brought up in the VM.

```
[root@VM ~]# modprobe cxgb4vf
[root@VM ~]# ifconfig eth2 10.1.1.3/24 up
```

VF will be able to communicate with PF interface on the host.

## 3.2. VF Link state

VF link state depends on the physical port link status to which the VF is mapped. Refer to the above section for VF to physical port mappings. To override this and always enable the VF link, follow the below procedure. This enables VF to VF communication irrespective of the physical port link status.

1. After instantiating the VFs, check the current VF link state using the below command on Host (hypervisor). By default, it will be *auto*.

```
[root@host~]# ip link show mgmtpfX,Y
```

```
[root@host ~]# ip link show mgmtpf1,0
18: mgmtpf1,0: <NOARP> mtu 0 qdisc noop state DOWN mode DEFAULT group default qlen 1
    link/none
    vf 0 MAC 06:44:04:b4:e0:00, link-state auto
    vf 1 MAC 06:44:04:b4:e0:01, link-state auto
```

2. Enable the VF link state for the required VFs.

```
[root@host~]# ip link set dev mgmtpfX,Y vf Z state enable
```

```
[root@host ~]# ip link set dev mgmtpf1,0 vf 0 state enable
[root@host ~]# ip link show mgmtpf1,0
18: mgmtpf1,0: <NOARP> mtu 0 qdisc noop state DOWN mode DEFAULT group default qlen 1
    link/none
    vf 0 MAC 06:44:04:b4:e0:00, link-state enable
    vf 1 MAC 06:44:04:b4:e0:01, link-state auto
```

3. The VFs can then be assigned to Virtual Machines. On loading cxgb4vf driver in the VM and bringing up the VF interface, the VF will be enabled. It can then communicate with other VFs (which are enabled) irrespective of the physical link.

```
[root@VM ~]# ifconfig enp7s1
enp7s1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    ether 06:44:04:b4:e0:00 txqueuelen 1000 (Ethernet)
```

To revert to the default behaviour, set the VF link state to *auto*.

```
[root@host~]# ip link set dev mgmtpfX,Y vf Z state auto
```

## 3.3. VF Rate Limiting

This section describes the method to rate-limit traffic passing through virtual functions (VFs).

1. The VF rate limit needs to be set on the Host (hypervisor). Apply rate-limiting using:

```
[root@host~]# ip link set dev mgmtpfXX vf <vf_number> rate <rate_in_mbps>
```

Here,

- *mgmtpfXX* is the management interface to be used. For each PF on which VFs are instantiated, 1 management interface will be created (in "ifconfig -a").
  - *vf\_number* is the VF on which rate-limiting is applied. Value 0-15.
2. Run traffic over the VF (using kernel mode cxgb4vf or DPDK PMD) and the throughput should be rate-limited as per the values set in the previous step.

*Example:*

1. Four VFs are instantiated on PF0.

```
[root@host~]# modprobe cxgb4
[root@host~]# echo 4 >
/sys/class/net/ethX/device/driver/<bus_id>/sriov_numvfs
```

2. Two VMs are configured with two VFs each. Two different networks are configured with the following IP configuration:

```
VM0: VF0 (102.1.1.2/24), VF1 (102.2.2.2/24)
VM1: VF2 (102.1.1.3/24), VF3 (102.2.2.3/24)
```

3. VF Rate-limiting is configured on the host.

```
[root@host~]# ip link set dev mgmtpf10 vf 0 rate 2000
[root@host~]# ip link set dev mgmtpf10 vf 1 rate 3000
```

The traffic on 102.1.1.X network will be rate-limited to 2Gbps whereas, traffic on 102.2.2.X network will be rate-limited to 3Gbps.

### 3.4. Bonding

---

The VF network interfaces (assigned to a VM) can be aggregated into a single logical bonded interface effectively combining the bandwidth into a single connection. It also provides redundancy in case one of the link fails. Execute the following steps in the VM (attached with more than 1 VF interface):

1. Load the Virtual Function network driver.

```
[root@host~]# modprobe cxgb4vf
```

2. Create a bond interface.

```
[root@host~]# modprobe bonding mode=<bonding mode> <optional parameters>
```

3. Bring up the bond interface and enslave the VF interfaces to the bond.

```
[root@host~]# ifconfig bond0 up
[root@host~]# ifenslave bond0 ethX ethY
```

**Note** *ethX and ethY are the VF interfaces attached to the same VM. It is recommended to use VFs of different Ports to achieve redundancy in case of link failures.*

4. Assign IPv4/IPv6 address to the bond interface.

```
[root@host~]# ifconfig bond0 X.X.X.X/Y
[root@host~]# ifconfig bond0 inet6 add <128-bit IPv6 Address> up
```

### Example:

1. Two VFs are instantiated each on PF0 (Port 0) and PF1 (Port 1) on the host.

```
[root@host~]# modprobe cxgb4
[root@host~]# echo 2 >
/sys/class/net/eth4/device/driver/0000\:01\:00.0/sriov_numvfs
[root@host~]# echo 2 >
/sys/class/net/eth4/device/driver/0000\:01\:00.1/sriov_numvfs
```

2. One VM was configured with VF0 of PF0 and VF1 of PF1.

```
[root@host~]# modprobe cxgb4vf force_link_up=0
[root@host~]# ifconfig enp8s1
enp8s1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
ether 06:44:3c:a8:40:00 txqueuelen 1000 (Ethernet)
[root@host~]# ifconfig enp8s1f5d1
enp8s1f5d1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
ether 06:44:3c:a8:40:11 txqueuelen 1000 (Ethernet)
```

3. Bonding mode=1 was configured in the VM.

```
[root@host~]# modprobe bonding mode=1 miimon=100
[root@host~]# ifconfig bond0 up
[root@host~]# ifenslave bond0 enp8s1 enp8s1f5d1
[root@host~]# ifconfig bond0 10.1.1.223/24
```

The traffic will run over the bond interface in Active-Backup mode. If the link fails on enp8s1, the traffic will failover to enp8s1f5d1.

## 3.5. High Capacity VF Configuration

Chelsio adapters by default support 16 VFs per PF. To use more VFs per PF, follow the below steps on the host:

**Important** *This feature is currently supported only on T6225-SO-CR adapter.*

1. Change your current working directory to the Chelsio Unified Wire package directory and install the driver.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
[root@host~]# make CONF=HIGH_CAPACITY_VF install
```

**Note** *For more installation options, run `make help` or `install.py -h`.*

2. Update the adapter configuration and reboot the machine.

```
[root@host~]# chelsio_adapter_config.py
Chelsio adapter detected
|-----|
| Choose Chelsio card: |
| 1. T580_SO_CR      3:0.0 |
| 2. T6225_SO       4:0.0 |
|-----|
Select card: 2
Card T6225_SO(4:0.0) selected
|-----|
| Choose option |
| 1. Change to Default settings |
| 2. Change Adapter Config settings |
|-----|
Select option: 2
Changing Adapter Config settings
|-----|
| Possible Chelsio adapter settings: |
| 1: 248 VFs mode |
|-----|
248 VF setting selected
```

3. Instantiate virtual functions.

```
[root@host~]# modprobe cxgb4
[root@host~]# echo n >
/sys/class/net/ethX/device/driver/<bus_id>/sriov_numvfs
```

- 124 virtual functions can be instantiated on T5 adapter, with 31 virtual functions per physical function pf {0..3}.
- 248 virtual functions can be instantiated on T6 adapter, with 62 virtual functions per physical function pf {0..3}.

4. Unload the vNIC driver on the host (if loaded).

```
[root@host~]# rmmod cxgb4vf
```

5. The virtual functions can now be assigned to virtual machines (guests).
6. For each PF on which VFs are instantiated, one management interface (mgmtpfX,Y) will be created. You can see them using `ip link show` command.

```
[root@host ~]# ip link show
14: mgmtpf1,0: <NOARP> mtu 0 qdisc noop state DOWN mode DEFAULT qlen 1
link/none
vf 0 MAC 06:44:3c:b1:00:00, link-state auto
15: mgmtpf1,1: <NOARP> mtu 0 qdisc noop state DOWN mode DEFAULT qlen 1
link/none
vf 0 MAC 06:44:3c:b1:80:10, link-state auto
16: mgmtpf1,2: <NOARP> mtu 0 qdisc noop state DOWN mode DEFAULT qlen 1
link/none
vf 0 MAC 06:44:3c:b1:80:20, link-state auto
17: mgmtpf1,3: <NOARP> mtu 0 qdisc noop state DOWN mode DEFAULT qlen 1
link/none
vf 0 MAC 06:44:3c:b1:80:30, link-state auto
```

7. To set a VLAN ID on Virtual Function,

```
[root@host ~]# ip link set <mgmtpfX,Y> vf <vf_index> vlan <vlan_id>
```

*Example:* The below command will set VLAN ID 20 to VF0 device instantiated on PF0 function.


```
[root@host ~]# ip link set mgmtpf1,0 vf 0 vlan 20
```

8. To set a MAC address on the Virtual Function,

```
[root@host ~]# ip link set <mgmtpfX,Y> vf <vf_index> mac <vnic_mac>
```

*Example:*

```
[root@host ~]# ip link set mgmtpf1,0 vf 0 mac 06:44:3c:11:22:33
```

 **Note** *The VF driver (cxgb4vf) needs to be reloaded on the VM for the new settings (VLAN or MAC address) to take effect.*

## 4. Software/Driver Unloading

### 4.1. Unloading the Driver

---

The vNIC driver must be unloaded on the Guest OS by the *root* user. Any attempt to unload the driver as a regular user may fail.

To unload the driver, execute the following command:

```
[root@host~]# rmmmod cxgb4vf
```

## IV. iWARP RDMA Offload

---

# 1. Introduction

Chelsio's Terminator engine implements a feature rich RDMA implementation which adheres to the IETF standards with optional markers and MPA CRC-32C.

The iWARP RDMA operation benefits from the virtualization, traffic management, and QoS mechanisms provided by the Terminator engine. It is possible to ACL process iWARP RDMA packets. It is also possible to rate control the iWARP traffic on a per-connection or per-class basis, and to give higher priority to QPs that implement distributed locking mechanisms. The iWARP operation also benefits from the high-performance and low latency TCP implementation in the offload engine.

## 1.1. Hardware Requirements

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel version:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Software/Driver Installation

### 2.1. Pre-requisites

Ensure that the following requirements are met before driver installation:

- Uninstall any OFED present in the machine.
- *The rdma-core-devel* package should be installed on RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4 systems.


### 2.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install iWARP drivers and libraries.

```
[root@host~]# make iwarp_install
```

 **Note** *For more installation options, run* `make help` *or* `install.py -h`

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 3. Software/Driver Loading

**Important**

*Ensure that all inbox drivers are unloaded before proceeding with the unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

### 3.1. Loading iWARP Driver

The driver must be loaded by the *root* user. Any attempt to load the driver as a regular user will fail.

To load the iWARP driver, load the NIC driver and core RDMA drivers first. Run the following commands:

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe iw_cxgb4  
[root@host~]# modprobe rdma_ucm
```

Optionally, you can start the iWARP Port Mapper daemon to enable port mapping.

```
[root@host~]# iwpmc
```

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Testing connectivity with *ping* and *rping*

Load the NIC, iWARP, and core RDMA modules as mentioned in the [Software/Driver Loading](#) section. After which, you will see two or four Ethernet interfaces for the Terminator device. Configure them with an appropriate IP address, netmask, etc. You can use the Linux *ping* command to test basic connectivity through the Terminator interface. To test RDMA, use the *rping* command that is included in the librdmacm-utils RPM.

Run the following command on the server machine:

```
[root@host~]# rping -s -a server_ip_addr -p 9999
```

Run the following command on the client machine:

```
[root@host~]# rping -c -Vv -C10 -a server_ip_addr -p 9999
```

You should see ping data like this on the client:

```
ping data: rdma-ping-0: ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqr
ping data: rdma-ping-1: BCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrs
ping data: rdma-ping-2: CDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrst
ping data: rdma-ping-3: DEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstu
ping data: rdma-ping-4: EFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuv
ping data: rdma-ping-5: FGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvw
ping data: rdma-ping-6: GHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwx
ping data: rdma-ping-7: HIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxy
ping data: rdma-ping-8: IJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz
ping data: rdma-ping-9: JKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyza
client DISCONNECT EVENT...
#
```

## 4.2. Enabling various MPis

### 4.2.1. Setting shell for Remote Login

User needs to set up authentication on the user account on all systems in the cluster to allow the user to remotely log on or executing commands without a password.

Quick steps to set up user authentication:

1. Change to the user home directory.

```
[root@host~]# cd
```

2. Generate authentication key.

```
[root@host~]# ssh-keygen -t rsa
```

3. Press *[Enter]* upon prompting to accept the default setup and empty password phrase.
4. Create an authorization file.

```
[root@host~]# cd .ssh  
[root@host~]# cat *.pub > authorized_keys  
[root@host~]# chmod 600 authorized_keys
```

5. Copy directory .ssh to all systems in the cluster.

```
[root@host~]# cd  
[root@host~]# scp -r /root/.ssh remotehostname-or-ipaddress:
```

### 4.2.2. Installation of libfabrics for Open MPI 5.X or higher version

Open MPI iWARP support is only available in Open MPI version 5.X or greater.

Follow the steps mentioned below to install libfabrics:

1. Download **libfabric-2.3.0.tar.bz2** from <https://github.com/ofiwg/libfabric>.
2. Extract it using the following command:

```
[root@host~]# tar -xvf libfabric-2.3.0.tar.bz2
```

3. Navigate to **libfabric-2.3.0** folder.

```
[root@host~]# cd libfabric-2.3.0/
```

4. Configure libfabrics using the following command:

```
[root@host~]# ./configure --prefix=/usr/local
```

5. Install libfabrics using the following command:

```
[root@host~]# make -j$(nproc) && make install
```

### 4.2.3. Installation of OpenMPI 5.X or higher version with libfabrics support

Follow the steps mentioned below to install OpenMPI with libfabrics support:

1. Download **openmpi-5.0.8** file from <https://download.open-mpi.org/release/open-mpi/v5.0/openmpi-5.0.8.tar.bz2>.
2. Extract it using the following command:

```
[root@host~]# tar xvf openmpi-5.0.8.tar.bz2
```

3. Navigate to **openmpi-5.0.8** folder.

```
[root@host~]# cd openmpi-5.0.8
```

4. Configure **OpenMPI** using the following command:

```
[root@host~]# ./configure CC=gcc CXX=g++ F77=gfortran FC=gfortran --  
prefix=/usr/mpi/gcc/openmpi-5.0.8 --libdir=/usr/mpi/gcc/openmpi-5.0.8/lib64  
--with-libfabric=/usr/local --with-libfabric-libdir=/usr/local/lib --enable-  
mpi-thread-multiple --enable-mpirun-prefix-by-default --with-contrib-vt-  
flags=--disable-iotrace --enable-mca-no-build=btl-uct
```

5. Install **OpenMPI** using the following command:

```
[root@host~]# make -j$(nproc) && make install
```

## 4.2.4. Installation of IMB-MPI benchmark

Follow the steps mentioned below to install IMB-MPI benchmark:

1. Download **IMB-v2021.8** file from <https://github.com/intel/mpi-benchmarks/archive/refs/tags/IMB-v2021.8.tar.gz>.
2. Extract it using the following command:

```
[root@host~]# tar -xvf mpi-benchmarks-IMB-v2021.8
```

3. Edited `/root/mpi-benchmarks-IMB-v2021.8/src_cpp/Makefile` as follows.

```
#ifeq ($(origin CC),default)
#CC=mpiicx
#endif
#ifeq ($(origin CXX),default)
#CXX=mpiicpx
#endif
#override CPPFLAGS += -I.
#override CFLAGS += -g -O0 -Wall -Werror
#override CXXFLAGS += -g -O0 -Wall -Wextra -Werror
#ifdef WITH_OPENMP
#ifeq ("$(CXX)",$(filter "$(CXX)", "mpiicpx" "icpx"))
#override CXXFLAGS += -qopenmp
#endif
#ifeq ("$(CC)",$(filter "$(CC)", "mpiicx" "icx"))
#override CFLAGS += -qopenmp
#endif
#ifeq ("$(CXX)",$(filter "$(CXX)", "mpiicpc" "icpc"))
#override CXXFLAGS += -qopenmp
#endif
#ifeq ("$(CC)",$(filter "$(CC)", "mpiicc" "icc"))
#override CFLAGS += -qopenmp
#endif
#ifeq "$(CXX)" "g++"
#override CXXFLAGS += -fopenmp
#endif
#ifeq "$(CC)" "gcc"
#override CFLAGS += -fopenmp
#endif
#ifeq "$(CXX)" "mpicxx"
#override CXXFLAGS += -fopenmp
#endif
#ifeq "$(CC)" "mpicc"
#override CFLAGS += -fopenmp
#endif
#endif
# ICC ICPC
```

```
ifeq ($(origin CC),default)
CC=/usr/mpi/gcc/openmpi-5.0.8/bin/mpicct
endif
ifeq ($(origin CXX),default)
CXX=/usr/mpi/gcc/openmpi-5.0.8/bin/mpicxx
endif
override CPPFLAGS += -I.
override CFLAGS = -g -Wall -Wextra -pedantic -Wno-long-long
CXXFLAGS = -g -Wall -Wextra -pedantic -Wno-long-long
```

4. Build and install IMB-MPI1 using the below command:

```
[root@host~]# make IMB-MPI1
```

5. Create *IMB* folder using the following command:

```
[root@host~]# mkdir -p /usr/mpi/gcc/openmpi-5.0.8/tests/IMB/
```

6. Copy the files using the following command:

```
[root@host~]# cp IMB-MPI1 /usr/mpi/gcc/openmpi-5.0.8/tests/IMB/
```

### 4.2.5. Running Open MPI

Follow the steps mentioned below to run Open MPI:

1. Load **cxgb4**, **iw\_cxgb4**, and **rdma\_ucm** and then bring up the interface.
2. Edit */root/hosts.txt* file with machine IPs.

```
root@host~]# cat /root/hosts.txt
10.193.80.216 slots=8
10.193.80.121 slots=8
```

3. Run the below command:

```
[root@host~]# /usr/mpi/gcc/openmpi-5.0.8/bin/mpirun -np 8 --hostfile
/root/hosts.txt --allow-run-as-root --map-by node --bind-to core --mca pml
cm --mca mtl ofi --mca mtl_ofi_provider_include verbs --mca osc rdma --mca
btl self,vader --mca mtl_ofi_use_device_rdma 1 /usr/mpi/gcc/openmpi-
5.0.8/tests/IMB/IMB-MPI1
```

## 4.3. Setting up NFS-RDMA

### 4.3.1. Starting NFS-RDMA

- **Server-side settings**

Follow the steps mentioned below to set up an NFS-RDMA server:

1. Make entry in `/etc/exports` file for the directories you need to export using NFS-RDMA on server as:

```
/share/rdma1      *(fsid=1,rw,async,insecure,no_root_squash)
/share/rdma2      *(fsid=2,rw,async,insecure,no_root_squash)
```

Note that for each directory you export, you must have a DIFFERENT fsid's.

2. Load the `iwarp` modules and make sure `peer2peer` is set to 1.
3. Load `xprtrdma` and `svcrdma` modules.

```
[root@host~]# modprobe xprtrdma
[root@host~]# modprobe svcrdma
```

4. Start the `nfs-server` service.

```
[root@host~]# service nfs-server start
```

All services in NFS should start without errors.

5. Now we need to edit the file `portlist` in the path `/proc/fs/nfsd/`. Include the rdma port 20049 into this file.

```
[root@host~]# echo rdma 20049 > /proc/fs/nfsd/portlist
```

6. Run `exportfs` to make local directories available for Network File System (NFS) clients to mount.

```
[root@host~]# exportfs -rav
```

Now the NFS-RDMA server is ready.

- **Client-side settings**

Follow the steps mentioned below on the client side:

1. Load the iwarp modules and make sure peer2peer is set to 1. Make sure that you are able to ping and ssh to the server Chelsio interface through which directories are exported.
2. Load the `xprtrdma` module.

```
[root@host~]# modprobe xprtrdma
```

3. Run the `showmount` command to show all directories from the server.

```
[root@host~]# showmount -e <server-chelsio-ip>
```

4. Once the exported directories are listed, mount the directories.

```
[root@host~]# mount.nfs <serverip>:<directory> <mountpoint-on-client> -o  
vers=3,rdma,port=20049,wsiz=65536,rsiz=65536
```

To use NFSv4, specify `vers=4`.

## 4.4. HMA

To use HMA, ensure that Unified Wire is installed using the *Unified Wire (Default)* configuration tuning option. Currently, 256 IPv4/128 IPv6 iWARP Offload connections are supported on T6 25G SO adapters.

 **Note** *The HMA feature is applicable only for T6 adapters.*

The following image shows the HMA reserved memory.

```
[root@~]# cat /sys/kernel/debug/cxgb4/0000\:05\:00.4/meminfo  
EDC0:          0x0-0x3ffff [4.00 MiB]  
EDC1:          0x400000-0x7ffff [4.00 MiB]  
HMA:           0x800000-0x63ffff [92.0 MiB]
```

The following image shows the number of iWARP offloaded connections.

```
[root@~]# cat /sys/kernel/debug/cxgb4/0000\:02\:00.4/tids  
Connections in use: 256  
TID range: 64..319, in use: 256  
STID range: 320..383, in use-IPv4/IPv6: 0/0  
ATID range: 0..127, in use: 0  
FTID range: 384..879  
HPFTID range: 0..63  
HW TID usage: 256 IP users, 0 IPv6 users
```

## 4.5. Performance Tuning

---

1. Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.
2. Run the performance tuning script to update few kernel parameters using sysctl and map iWARP queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

## 5. Software/Driver Unloading

To unload the iWARP driver, run the following command:

```
[root@host~]# rmmod iw_cxgb4
```

## V. RoCEv2

---

# 1. Introduction

Chelsio's Terminator engine implements a feature rich RDMA implementation which adheres to the IETF standards with optional markers and MPA CRC-32C.

RoCEv2 (RDMA over Converged Ethernet v2) enables low-latency, high-throughput data transfer by allowing direct memory access over standard Ethernet networks. It operates over UDP/IP at Layer 3, making it routable and scalable across modern data center networks. RoCEv2 reduces CPU overhead and improves performance.

**Note** *This is supported only on T7 family of adapters.*

**Note** *RoCEv2 is provided as a Alpha quality release.*

## 1.1. Hardware Requirements

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
    - T72200-FH
    - T72200
    - T7450
    - S72200\*
    - S71400\*
    - S7450\*
- \*Limited number of connections supported

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel version:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

---

## 2. Software/Driver Loading

**! Important**

*Ensure that all inbox drivers are unloaded before proceeding with the unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4
libcxgbi libcxgb
```

### 2.1. Loading RoCEv2 Driver

The driver must be loaded by the *root* user. Any attempt to load the driver as a regular user will fail.

To load the RoCEv2 driver, load the NIC driver and core RDMA drivers first. Run the following commands:

```
[root@host~]# modprobe cxgb4
[root@host~]# modprobe iw_cxgb4 roce_mode=1
[root@host~]# modprobe rdma_ucm
```

## 3. Software/Driver Configuration and Fine-tuning

### 3.1. Testing connectivity with *ping* and *rping*

Load the NIC, RoCEv2, and core RDMA modules as mentioned in the [Software/Driver Loading](#) section. After which, you will see two or four Ethernet interfaces for the Terminator device. Configure them with an appropriate IP address, netmask, etc. You can use the Linux *ping* command to test basic connectivity through the Terminator interface. To test RDMA, use the *rping* command that is included in the librdmacm-utils RPM.

Run the following command on the server machine:

```
[root@host~]# rping -s -a server_ip_addr -p 9999
```

Run the following command on the client machine:

```
[root@host~]# rping -c -Vv -C10 -a server_ip_addr -p 9999
```

You should see ping data like this on the client:

```
ping data: rdma-ping-0: ABCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqr
ping data: rdma-ping-1: BCDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrs
ping data: rdma-ping-2: CDEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrst
ping data: rdma-ping-3: DEFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstu
ping data: rdma-ping-4: EFGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuv
ping data: rdma-ping-5: FGHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvw
ping data: rdma-ping-6: GHIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwx
ping data: rdma-ping-7: HIJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxy
ping data: rdma-ping-8: IJKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz
ping data: rdma-ping-9: JKLMNOPQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyza
client DISCONNECT EVENT...
#
```

## 3.2. Setting up NFS-RDMA

### 3.2.1. Starting NFS-RDMA

- **Server-side settings**

Follow the steps mentioned below to set up an NFS-RDMA server:

1. Make entry in `/etc/exports` file for the directories you need to export using NFS-RDMA on server as:

```
/share/rdma1      *(fsid=1,rw,async,insecure,no_root_squash)
/share/rdma2      *(fsid=2,rw,async,insecure,no_root_squash)
```

Note that for each directory you export, you must have a DIFFERENT fsid's.

2. Load the `iwarp` modules and make sure `peer2peer` is set to 1.
3. Load `xprttdma` and `svcrdma` modules.

```
[root@host~]# modprobe xprttdma
[root@host~]# modprobe svcrdma
```

4. Start the `nfs-server` service.

```
[root@host~]# service nfs-server start
```

All services in NFS should start without errors.

5. Now we need to edit the file `portlist` in the path `/proc/fs/nfsd/`. Include the rdma port 20049 into this file.

```
[root@host~]# echo rdma 20049 > /proc/fs/nfsd/portlist
```

6. Run `exportfs` to make local directories available for Network File System (NFS) clients to mount.

```
[root@host~]# exportfs -rav
```

Now the NFS-RDMA server is ready.

- **Client-side settings**

Follow the steps mentioned below on the client side:

1. Load the iwarp modules and make sure peer2peer is set to 1. Ensure that you are able to ping and ssh to the server Chelsio interface through which directories are exported.
2. Load the `xprtrdma` module.

```
[root@host~]# modprobe xprtrdma
```

3. Run the `showmount` command to show all directories from the server.

```
[root@host~]# showmount -e <server-chelsio-ip>
```

4. Once the exported directories are listed, mount the directories.

```
[root@host~]# mount.nfs <serverip>:<directory> <mountpoint-on-client> -o  
vers=3,rdma,port=20049,wsiz=65536,rsiz=65536
```

To use NFSv4, specify `vers=4`.

### 3.3. Performance Tuning

---

1. Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.
2. Run the performance tuning script to update few kernel parameters using `sysctl` and map iWARP queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

## 4. Software/Driver Unloading

To unload the RoCEv2 driver, run the following command:

```
[root@host~]# rmmod iw_cxgb4
```

## VI. NVMe-oF iWARP

---

# 1. Introduction

NVMe over Fabrics specification extends the benefits of NVMe to large fabrics, beyond the reach and scalability of PCIe. NVMe enables deployments with hundreds or thousands of SSDs using a network interconnect, such as iWARP RDMA over Ethernet. Thanks to an optimized protocol stack, an end-to-end NVMe solution is expected to reduce access latency and improve performance, particularly when paired with a low-latency, high-efficiency transport such as iWARP RDMA. This allows applications to achieve fast storage response times, irrespective of whether the NVMe SSDs are attached locally or accessed remotely across enterprise or datacenter networks.

## 1.1. Hardware Requirements

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel version:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Ensure that the following NVMe-oF iWARP components are enabled in the kernel configuration file:

```
CONFIG_BLK_DEV_NVME
CONFIG_NVME_RDMA
CONFIG_NVME_TARGET
CONFIG_NVME_TARGET_RDMA
CONFIG_BLK_DEV_NULL_BLK
CONFIG_CONFIGFS_FS
```

2. If the NVMe-oF iWARP components are not enabled, enable them as follows:

```
CONFIG_BLK_DEV_NVME=m
CONFIG_NVME_RDMA=m
CONFIG_NVME_TARGET=m
CONFIG_NVME_TARGET_RDMA=m
CONFIG_BLK_DEV_NULL_BLK=m
CONFIG_CONFIGFS_FS=y
```

3. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

## 3. Software/Driver Installation

### 3.1. Pre-requisites

Ensure that the following requirements are met before driver installation:

- Uninstall any OFED present in the machine.
- The *rdma-core-devel* package should be installed on *RHEL/Rocky/AlmaLinux 10.X/9.7/9.6* and *Ubuntu-24.04.X* systems.

### 3.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install iWARP RDMA Offload driver and NVMe utilities.

```
[root@host~]# make nvme_install
```

**Note** *For more installation options, run `make help` or `install.py -h`.*

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 4. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

Follow the steps mentioned below on both target and initiator machines:

1. Load the following drivers:

```
[root@host~]# modprobe iw_cxgb4  
[root@host~]# modprobe rdma_ucm
```

2. Bring up the Chelsio interface(s).

```
[root@host~]# ifconfig ethX x.x.x.x up
```

3. Mount configs.

```
[root@host~]# mount -t configfs none /sys/kernel/config
```

4. On target, load the following drivers:

```
[root@host~]# modprobe null_blk  
[root@host~]# modprobe nvmet  
[root@host~]# modprobe nvmet-rdma
```

On initiator, load the following drivers:

```
[root@host~]# modprobe nvme  
[root@host~]# modprobe nvme-rdma
```

## 5. Software/Driver Configuration and Fine-tuning

The following sections describe the method to configure target and initiator.

### 5.1. Target

1. The following commands configure target using *nvmetcli* with a LUN:

```
[root@host~]# nvmetcli
/> cd subsystems
/subsystems> create nvme-ram0
/subsystems> cd nvme-ram0/namespaces
/subsystems/n...m0/namespaces> create nsid=1
/subsystems/n...m0/namespaces> cd 1
/subsystems/n.../namespaces/1> set device path=/dev/ram1
/subsystems/n.../namespaces/1> cd ../..
/subsystems/nvme-ram0> set attr allow_any_host=1
/subsystems/nvme-ram0> cd namespaces/1
/subsystems/n.../namespaces/1> enable
/subsystems/n.../namespaces/1> cd ../../../../..
/> cd ports
/ports> create 1
/ports> cd 1/
/ports/1> set addr adrfam=ipv4
/ports/1> set addr trtype=rdma
/ports/1> set addr trsvcid=4420
/ports/1> set addr traddr=102.1.1.102
/ports/1> cd subsystems
/ports/1/subsystems> create nvme-ram0
```

2. Save the target configuration to a file.

```
/ports/1/subsystems> saveconfig /root/nvme-target_setup
/ports/1/subsystems> exit
```

3. To clear the targets,

```
[root@host~]# nvmetcli clear
```

## 5.2. Initiator

### 1. Discover the target.

```
[root@host~]# nvme discover -t rdma -a <target_ip> -s 4420
```

### 2. Connect to the target.

- Connecting to a specific target.

```
[root@host~]# nvme connect -t rdma -a <target_ip> -s 4420 -n <target_name>
```

- Connecting to all targets configured on a portal.

```
[root@host~]# nvme connect-all -t rdma -a <target_ip> -s 4420
```

### 3. List the connected targets.

```
[root@host~]# nvme list
```

### 4. Format and mount the NVMe disks shown with the above command.

### 5. Disconnect from the target and unmount the disk.

```
[root@host~]# nvme disconnect -d <nvme_disk_name>
```

**Note** *nvme\_disk\_name is the name of the device (e.g., nvme0n1) and not the device path.*

## 5.3. HMA

To use HMA, ensure that Unified Wire is installed using the *Unified Wire (Default)* configuration tuning option. Currently, 256 IPv4/128 IPv6 NVMe-oF iWARP Initiator offload connections are supported on T6 25G SO adapters.

**Note** *The HMA feature is applicable only for T6 adapters.*

The following image shows the HMA reserved memory.

```
[root@~]# cat /sys/kernel/debug/cxgb4/0000\:05\:00.4/meminfo
EDC0:      0x0-0x3ffffff [4.00 MiB]
EDC1:      0x400000-0x7ffffff [4.00 MiB]
HMA:       0x800000-0x63ffffff [92.0 MiB]
```

The following image shows the number of NVMe-oF iWARP offloaded connections.

```
[root@~]# cat /sys/kernel/debug/cxgb4/0000\:02\:00.4/tids
Connections in use: 256
TID range: 64..319, in use: 256
STID range: 320..383, in use-IPv4/IPv6: 0/0
ATID range: 0..127, in use: 0
FTID range: 384..879
HPFTID range: 0..63
HW TID usage: 256 IP users, 0 IPv6 users
```

The total number of connections depends on the devices used and I/O queues. For example, if the Initiator connects to 2 target devices with 4 I/O queues per device (-i 4), a total of 10 NVMe-oF iWARP connections will be used.

## 5.4. Performance Tuning

Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.

1. Ensure that Unified Wire is installed with *NVMe Performance* configuration tuning.
2. Run the performance tuning script to update few kernel parameters using sysctl and map iWARP queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

3. Set the *inline data size* to 8192 before enabling the NVMe port.

```
[root@host~]# mkdir /sys/kernel/config/nvmet/ports/1
[root@host~]# echo 8192 >
/sys/kernel/config/nvmet/ports/1/param_inline_data_size
```

The following log should be seen in dmesg on enabling the NVMe port.

```
[84779.386553] nvmet_rdma: enabling port 1 (10.1.1.149:4420) inline_data_size 8192
```

## 6. Software/Driver Unloading

Follow the steps mentioned below to unload the drivers:

On target, run the following commands:

```
[root@host~]# rmmod nvmet-rdma  
[root@host~]# rmmod nvmet  
[root@host~]# rmmod iw_cxgb4
```

On initiator, run the following commands:

```
[root@host~]# rmmod nvme-rdma  
[root@host~]# rmmod nvme  
[root@host~]# rmmod iw_cxgb4
```

## VII. NVMe-oF RoCEv2

---

# 1. Introduction

NVMe over Fabrics specification extends the benefits of NVMe to large fabrics, beyond the reach and scalability of PCIe. NVMe enables deployments with hundreds or thousands of SSDs using a network interconnect.

RoCEv2 (RDMA over Converged Ethernet v2) enables low-latency, high-throughput data transfer by allowing direct memory access over standard Ethernet networks. It operates over UDP/IP at Layer 3, making it routable and scalable across modern data center networks. RoCEv2 reduces CPU overhead and improves performance.

 **Note** *NVMe-oF RoCEv2 is provided as an Alpha quality release.*

## 1.1. Hardware Requirements

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
  - S72200
  - S71400
  - S7450

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel versions:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Ensure that the following NVMe-oF iWARP components are enabled in the kernel configuration file:

```
CONFIG_BLK_DEV_NVME
CONFIG_NVME_RDMA
CONFIG_NVME_TARGET
CONFIG_NVME_TARGET_RDMA
CONFIG_BLK_DEV_NULL_BLK
CONFIG_CONFIGFS_FS
```

2. If the NVMe-oF iWARP components are not enabled, enable them as follows:

```
CONFIG_BLK_DEV_NVME=m
CONFIG_NVME_RDMA=m
CONFIG_NVME_TARGET=m
CONFIG_NVME_TARGET_RDMA=m
CONFIG_BLK_DEV_NULL_BLK=m
CONFIG_CONFIGFS_FS=y
```

3. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

## 3. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4
libcxgbi libcxgb
```

Follow the steps mentioned below on both target and initiator machines:

1. Load the following drivers:

```
[root@host~]# modprobe iw_cxgb4 roce_mode=1
[root@host~]# modprobe rdma_ucm
```

2. Bring up the Chelsio interface(s).

```
[root@host~]# ifconfig ethX x.x.x.x up
```

3. Mount configs.

```
[root@host~]# mount -t configfs none /sys/kernel/config
```

4. On target, load the following drivers:

```
[root@host~]# modprobe null_blk
[root@host~]# modprobe nvmet
[root@host~]# modprobe nvmet-rdma
```

On initiator, load the following drivers:

```
[root@host~]# modprobe nvme
[root@host~]# modprobe nvme-rdma
```

## 4. Software/Driver Configuration and Fine-tuning

The following sections describe the method to configure target and initiator.

### 4.1. Target

1. The following commands configure target using *nvmectl* with a LUN:

```
[root@host~]# nvmectl  
> cd subsystems  
/subsystems> create nvme-ram0  
/subsystems> cd nvme-ram0/namespaces  
/subsystems/n...m0/namespaces> create nsid=1  
/subsystems/n...m0/namespaces> cd 1  
/subsystems/n.../namespaces/1> set device path=/dev/ram1  
/subsystems/n.../namespaces/1> cd ../..  
/subsystems/nvme-ram0> set attr allow_any_host=1  
/subsystems/nvme-ram0> cd namespaces/1  
/subsystems/n.../namespaces/1> enable  
/subsystems/n.../namespaces/1> cd ../../../../..  
> cd ports  
/ports> create 1  
/ports> cd 1/  
/ports/1> set addr adrfam=ipv4  
/ports/1> set addr trtype=rdma  
/ports/1> set addr trsvcid=4420  
/ports/1> set addr traddr=102.1.1.102  
/ports/1> cd subsystems  
/ports/1/subsystems> create nvme-ram0
```

2. Save the target configuration to a file.

```
/ports/1/subsystems> saveconfig /root/nvme-target_setup  
/ports/1/subsystems> exit
```

3. To clear the targets,

```
[root@host~]# nvmectl clear
```

## 4.2. Performance Tuning

Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.

1. Ensure that Unified Wire is installed with *NVMe Performance* configuration tuning.
2. Run the performance tuning script to update few kernel parameters using sysctl and map NVMe-oF RoCEv2 queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

3. Set the *inline data size* to 8192 before enabling the NVMe port.

```
[root@host~]# mkdir /sys/kernel/config/nvmet/ports/1
[root@host~]# echo 8192 >
/sys/kernel/config/nvmet/ports/1/param_inline_data_size
```

The following log should be seen in dmesg on enabling the NVMe port.

```
[84779.386553] nvmet_rdma: enabling port 1 (10.1.1.149:4420) inline_data_size 8192
```

## 5. Software/Driver Unloading

Follow the steps mentioned below to unload the drivers:

On target, run the following commands:

```
[root@host~]# rmmod nvmet-rdma
[root@host~]# rmmod nvmet
[root@host~]# rmmod iw_cxgb4
```

On initiator, run the following commands:

```
[root@host~]# rmmod nvme-rdma
[root@host~]# rmmod nvme
[root@host~]# rmmod iw_cxgb4
```

## VIII. SPDK (user space) NVMe-oF iWARP

---

# 1. Introduction

SPDK (Storage Performance Development Kit) is designed to extract maximum performance by moving all the necessary drivers to user space, polling hardware for completions instead of relying on interrupts and avoiding all locks in the I/O path provides the benefits of high and scalable performance and low latency for storage applications. SPDK provides both user space NVMe-oF target (capable of serving disks) and initiator (host) which can run over iWARP RDMA transport.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel versions:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Ensure that the following SPDK NVMe-oF iWARP components are enabled in the kernel configuration file:

```
CONFIG_BLK_DEV_NVME
CONFIG_NVME_RDMA
CONFIG_NVME_TARGET
CONFIG_NVME_TARGET_RDMA
CONFIG_BLK_DEV_NULL_BLK
CONFIG_CONFIGFS_FS
```

2. If the SPDK NVMe-oF iWARP components are not enabled, enable them as follows:

```
CONFIG_BLK_DEV_NVME=m
CONFIG_NVME_RDMA=m
CONFIG_NVME_TARGET=m
CONFIG_NVME_TARGET_RDMA=m
CONFIG_BLK_DEV_NULL_BLK=m
CONFIG_CONFIGFS_FS=y
```

3. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

## 3. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

Follow the steps mentioned below on both target and initiator machines:

1. Load the iWARP RDMA Offload drivers.

```
[root@host~]# modprobe iw_cxgb4  
[root@host~]# modprobe rdma_ucm
```

2. Bring up the Chelsio interface(s).

```
[root@host~]# ifconfig ethX x.x.x.x up
```

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Target

#### 1. Download SPDK v24.05 LTS.

```
[root@host~]# git clone https://github.com/spdk/spdk
[root@host~]# cd spdk
[root@host~]# git checkout v24.05
[root@host~]# git submodule update -init
Change the below in CONFIG file.
CONFIG_FIO_PLUGIN=y
FIO_SOURCE_DIR=<path_to_FIO_source>
CONFIG_RDMA=y
CONFIG_RDMA_SEND_WITH_INVALID=y
```

#### 2. Run the below script to check that the minimum SPDK dependencies are installed.

```
[root@host~]# cd spdk
[root@host~]# sh scripts/pkgdep.sh
```

#### 3. Compile SPDK with RDMA and install it.

```
[root@host~]# make clean ; ./configure --with-rdma; make; make install
```

#### 4. Configure Huge Pages.

```
[root@host~]# mkdir -p /mnt/huge
[root@host~]# echo 8192 > /proc/sys/vm/nr_hugepages
[root@host~]# echo 0 > /sys/kernel/mm/hugepages/hugepages-
1048576kB/nr_hugepages
[root@host~]# echo 8192 > /sys/kernel/mm/hugepages/hugepages-
2048kB/nr_hugepages
[root@host~]# vim /etc/fstab
nodev          /dev/hugepages          hugetlbfs pagesize=2MB  0 0
nodev          /mnt/huge                hugetlbfs pagesize=1GB  0 0
[root@host~]# mount -a
[root@host~]# cd spdk
[root@host~]# NRHUGE=8192 scripts/setup.sh
```

#### 5. Start the SPDK NVMe-oF iWARP target.

```
[root@host~]# spdk/build/bin/nvmf_tgt -m 0xFF --wait-for-rpc &
[root@host~]# spdk/scripts/rpc.py iobuf_set_options --large-pool-count 8192
[root@host~]# spdk/scripts/rpc.py framework_start_init
```

## 6. Below are the sample configuration steps to create a malloc LUN.

```
[root@host~]# spdk/scripts/rpc.py nvme_create_transport -t RDMA -c 4096 -u
131072 -n 8192 -b 700
[root@host~]# spdk/scripts/rpc.py bdev_malloc_create -b Malloc$i 256 512
[root@host~]# spdk/scripts/rpc.py nvme_create_subsystem nqn.2016-
06.io.spdk:cnode0 -a -s SPDK0000000000000000 -d SPDK_Controller0
[root@host~]# spdk/scripts/rpc.py nvme_subsystem_add_ns nqn.2016-
06.io.spdk:cnode0 Malloc0
[root@host~]# spdk/scripts/rpc.py nvme_subsystem_add_listener nqn.2016-
06.io.spdk:cnode0 -t rdma -a 10.1.1.163 -s 4420
```

## 4.2. Initiator

SPDK NVMe-oF iWARP target works seamlessly with SPDK NVMe-oF iWARP initiator or any standard Linux kernel initiators. Refer to the [NVMe-oF iWARP Initiator](#) section for steps to use Linux kernel initiator. To use the SPDK NVMe-oF iWARP Initiator,

1. Follow steps 1 to 4 of the SPDK Target section above to configure and install SPDK.
2. Connect to the target using the fio plugin.

```
[root@host~]# LD_PRELOAD=/root/spdk/build/fi/spdk_nvme fio --
rw=randread/randwrite --name=random --norandommap=1 --
ioengine=/root/spdk/build/fio/spdk_nvme --thread=1 --size=400m --
group_reporting --exitall --invalidate=1 --direct=1 --filename='trtype=RDMA
adrfam=IPv4 traddr=10.1.1.163 trsvcid=4420 subnqn=nqn.2016-
06.io.spdk:cnode0 ns=1' --time_based --runtime=20 --iodepth=64 --numjobs=4
--unit_base=1 --bs=<value> --kb_base=1000 --ramp_time=3
```

## 4.3. Performance Tuning

Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.

1. Ensure that Unified Wire is installed with *NVMe Performance* configuration tuning.
2. Run the performance tuning script to update few kernel parameters using sysctl and map iWARP queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

## 5. Software/Driver Unloading

Follow the steps mentioned below to unload the SPDK NVMe-oF iWARP driver:

```
[root@host~]# rmmod iw_cxgb4
```

## IX. SPDK (user space) NVMe-oF RoCEv2

---

# 1. Introduction

**SPDK** (Storage Performance Development Kit) is designed to extract maximum performance by moving all the necessary drivers to user space, polling hardware for completions instead of relying on interrupts and avoiding all locks in the I/O path provides the benefits of high and scalable performance and low latency for storage applications. SPDK provides both user space NVMe-oF target (capable of serving disks) and initiator (host) which can run over RoCEv2 RDMA transport.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel version:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Ensure that the following SPDK NVMe-oF iWARP components are enabled in the kernel configuration file:

```
CONFIG_BLK_DEV_NVME
CONFIG_NVME_RDMA
CONFIG_NVME_TARGET
CONFIG_NVME_TARGET_RDMA
CONFIG_BLK_DEV_NULL_BLK
CONFIG_CONFIGFS_FS
```

2. If the SPDK NVMe-oF iWARP components are not enabled, enable them as follows:

```
CONFIG_BLK_DEV_NVME=m
CONFIG_NVME_RDMA=m
CONFIG_NVME_TARGET=m
CONFIG_NVME_TARGET_RDMA=m
CONFIG_BLK_DEV_NULL_BLK=m
CONFIG_CONFIGFS_FS=y
```

3. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

## 3. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

Follow the steps mentioned below on both target and initiator machines:

1. Load the iWARP RDMA Offload drivers.

```
[root@host~]# modprobe iw_cxgb4 roce_mode=1  
[root@host~]# modprobe rdma_ucm
```

2. Bring up the Chelsio interface(s).

```
[root@host~]# ifconfig ethX x.x.x.x up
```

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Target

1. Download SPDK v24.05 LTS.

```
[root@host~]# git clone https://github.com/spdk/spdk
[root@host~]# cd spdk
[root@host~]# git checkout v24.05
[root@host~]# git submodule update -init
Change the below in CONFIG file.
CONFIG_FIO_PLUGIN=y
FIO_SOURCE_DIR=<path_to_FIO_source>
CONFIG_RDMA=y
CONFIG_RDMA_SEND_WITH_INVALID=y
```

2. Run the below script to check that the minimum SPDK dependencies are installed.

```
[root@host~]# cd spdk
[root@host~]# sh scripts/pkgdep.sh
```

3. Compile SPDK with RDMA and install it.

```
[root@host~]# make clean ; ./configure --with-rdma; make; make install
```

4. Configure Huge Pages.

```
[root@host~]# mkdir -p /mnt/huge
[root@host~]# echo 8192 > /proc/sys/vm/nr_hugepages
[root@host~]# echo 0 > /sys/kernel/mm/hugepages/hugepages-
1048576kB/nr_hugepages
[root@host~]# echo 8192 > /sys/kernel/mm/hugepages/hugepages-
2048kB/nr_hugepages
[root@host~]# vim /etc/fstab
nodev          /dev/hugepages          hugetlbfs pagesize=2MB  0 0
nodev          /mnt/huge                hugetlbfs pagesize=1GB  0 0
[root@host~]# mount -a
[root@host~]# cd spdk
[root@host~]# NRHUGE=8192 scripts/setup.sh
```

5. Start the SPDK NVMe-oF iWARP target.

```
[root@host~]# spdk/build/bin/nvmf_tgt -m 0xFF --wait-for-rpc &
[root@host~]# spdk/scripts/rpc.py iobuf_set_options --large-pool-count 8192
[root@host~]# spdk/scripts/rpc.py framework_start_init
```

6. Below are the sample configuration steps to create a malloc LUN.

```
[root@host~]# spdk/scripts/rpc.py nvme_create_transport -t RDMA -c 4096 -u
131072 -n 8192 -b 700
[root@host~]# spdk/scripts/rpc.py bdev_malloc_create -b Malloc$i 256 512
[root@host~]# spdk/scripts/rpc.py nvme_create_subsystem nqn.2016-
06.io.spdk:cnode0 -a -s SPDK0000000000000000 -d SPDK_Controller0
[root@host~]# spdk/scripts/rpc.py nvme_subsystem_add_ns nqn.2016-
06.io.spdk:cnode0 Malloc0
[root@host~]# spdk/scripts/rpc.py nvme_subsystem_add_listener nqn.2016-
06.io.spdk:cnode0 -t rdma -a 10.1.1.163 -s 4420
```

## 4.2. Initiator

SPDK NVMe-oF iWARP target works seamlessly with SPDK NVMe-oF iWARP initiator or any standard Linux kernel initiators. Refer to the [NVMe-oF iWARP Initiator](#) section for steps to use Linux kernel initiator. To use the SPDK NVMe-oF iWARP Initiator,

1. Follow steps 1 to 4 of the SPDK Target section above to configure and install SPDK.
2. Connect to the target using the fio plugin.

```
[root@host~]# LD_PRELOAD=/root/spdk/build/fi/spdk_nvme fio --
rw=randread/randwrite --name=random --norandommap=1 --
ioengine=/root/spdk/build/fio/spdk_nvme --thread=1 --size=400m --
group_reporting --exitall --invalidate=1 --direct=1 --filename='trtype=RDMA
adrfam=IPv4 traddr=10.1.1.163 trsvcid=4420 subnqn=nqn.2016-
06.io.spdk:cnode0 ns=1' --time_based --runtime=20 --iodepth=64 --numjobs=4
--unit_base=1 --bs=<value> --kb_base=1000 --ramp_time=3
```

## 4.3. Performance Tuning

Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.

1. Ensure that Unified Wire is installed with *NVMe Performance* configuration tuning.
2. Run the performance tuning script to update few kernel parameters using sysctl and map iWARP queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

## 5. Software/Driver Unloading

Follow the steps mentioned below to unload the SPDK NVMe-oF iWARP driver:

```
[root@host~]# rmmod iw_cxgb4
```

## X. NVMe-oF TOE

---

# 1. Introduction

NVMe over Fabrics specification extends the benefits of NVMe to large fabrics, beyond the reach and scalability of PCIe. NVMe over Fabrics (NVMe-oF) based on TCP is a new technology which enables the use of NVMe-oF over existing Datacenter IP networks. Chelsio's TOE (TCP Offload Engine) is fully capable of offloading TCP/IP processing to hardware at 100Gbps and provides a low latency, high throughput, plug-and-play Ethernet solution for connecting high-performance NVMe SSDs over a scalable, congestion controlled and traffic managed fabric, with no special configuration needed. The unique ability of a TOE to perform the full transport layer functionality in hardware is essential to obtaining tangible benefits. The vital aspect of the transport layer is process-to-process communication. That is the data passed to the TOE comes straight from the application process, and the data delivered by the TOE goes straight to the application process.

## 1.1. Hardware Requirements

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the NVMe-oF TOE driver is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Ensure that the following NVMe/TCP components are enabled in the kernel configuration file:

```
CONFIG_NVME_CORE
CONFIG_NVME_FABRICS
CONFIG_NVME_TCP
CONFIG_NVME_TARGET
CONFIG_NVME_TARGET_TCP
CONFIG_BLK_DEV_NVME
CONFIG_BLK_DEV_NULL_BLK
CONFIG_CONFIGFS_FS
```

2. If the NVMe/TCP components are not enabled, enable them as follows:

```
CONFIG_NVME_CORE=m
CONFIG_NVME_FABRICS=m
CONFIG_NVME_TCP=m
CONFIG_NVME_TARGET=m
CONFIG_NVME_TARGET_TCP=m
CONFIG_BLK_DEV_NVME=m
CONFIG_BLK_DEV_NULL_BLK=m
CONFIG_CONFIGFS_FS=y
```

3. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

---

## 3. Software/Driver Installation


### 3.1. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install TOE driver and NVMe utilities.

```
[root@host~]# make nvme_toe_install
```

 **Note** For more installation options, run `make help` or `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 4. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with Unified Wire Drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4
libcxgbi libcxgb
```

Follow the steps mentioned below on both target and initiator machines:

1. Load the TOE driver.

```
[root@host~]# modprobe t4_tom
```

2. Bring up the Chelsio interface(s).

```
[root@host~]# ifconfig ethX x.x.x.x up
```

3. Mount configs.

```
[root@host~]# mount -t configfs none /sys/kernel/config
```

4. Apply cop policy to disable DDP and Rx Coalesce.

```
[root@host~]# cat <policy_file>
all => offload !ddp !coalesce
[root@host~]# cop -d -o <policy_out> <policy_file>
[root@host~]# cxgbtool ethX policy <policy_out>
```

**i Note** *The policy applied using cxgbtool is not persistent and should be applied every time drivers are reloaded, or the machine is rebooted.*

The applied cop policies can be read using,

```
[root@host~]# cat /proc/net/offload/toeX/read-cop
```

5. Load the nvme drivers. On target, run the following commands:

```
[root@host~]# modprobe null_blk
[root@host~]# modprobe nvmet
[root@host~]# modprobe nvmet-tcp
```

On initiator, run the following commands:

```
[root@host~]# modprobe nvme
[root@host~]# modprobe nvme-tcp
```

## 5. Software/Driver Configuration and Fine-tuning

The following sections describe the method to configure target and initiator.

### 5.1. Target

1. The following commands configure the target using *nvmetcli* with a LUN.

```
[root@host~]# nvmetcli
/> cd subsystems
/subsystems> create nvme-ram0
/subsystems> cd nvme-ram0/namespaces
/subsystems/n...m0/namespaces> create nsid=1
/subsystems/n...m0/namespaces> cd 1
/subsystems/n.../namespaces/1> set device path=/dev/ram1
/subsystems/n.../namespaces/1> cd ../..
/subsystems/nvme-ram0> set attr allow_any_host=1
/subsystems/nvme-ram0> cd namespaces/1
/subsystems/n.../namespaces/1> enable
/subsystems/n.../namespaces/1> cd ../../../../..
/> cd ports
/ports> create 1
/ports> cd 1/
/ports/1> set addr adrfam=ipv4
/ports/1> set addr trtype=tcp
/ports/1> set addr trsvcid=4420
/ports/1> set addr traddr=102.1.1.102
/ports/1> cd subsystems
/ports/1/subsystems> create nvme-ram0
```

2. Save the target configuration to a file.

```
/ports/1/subsystems> saveconfig /root/nvme-target_setup
/ports/1/subsystems> exit
```

3. To clear the targets,

```
[root@host~]# nvmetcli clear
```

### 5.2. Initiator

1. Discover the target.

```
[root@host~]# nvme discover -t tcp -a <target_ip> -s 4420
```

## 2. Connect to target.

- Connecting to a specific target.

```
[root@host~]# nvme connect -t tcp -a <target_ip> -s 4420 -n <target_name>
```

- Connecting to all targets configured on a portal.

```
[root@host~]# nvme connect-all -t tcp -a <target_ip> -s 4420
```

## 3. List the connected targets.

```
[root@host~]# nvme list
```

## 4. Format and mount the NVMe disks shown with the above command.

## 5. Disconnect from the target and unmount the disk.

```
[root@host~]# nvme disconnect -d <nvme_disk_name>
```

**Note** *nvme\_disk\_name* is the name of the device (for example, *nvme0n1*) and not the device path.

## 5.3. HMA

To use HMA, ensure that Unified Wire is installed using the *Unified Wire (Default)* configuration tuning option. Currently, 256 IPv4/128 IPv6 NVMe-oF TOE Initiator offload connections are supported on T6 25G SO adapters.

The following image shows the HMA reserved memory.

```
[root@localhost ~]# cat /sys/kernel/debug/cxgb4/0000\:05\:00.4/meminfo
EDC0:          0x0-0x3ffffff [4.00 MiB]
EDC1:          0x400000-0x7ffffff [4.00 MiB]
HMA:           0x800000-0x63ffffff [92.0 MiB]
```

The following image shows the number of NVMe-oF TOE offloaded connections.

```
[root@localhost ~]# cat /sys/kernel/debug/cxgb4/0000\:02\:00.4/tids
Connections in use: 256
TID range: 64..319, in use: 256
STID range: 320..383, in use-IPv4/IPv6: 0/0
ATID range: 0..127, in use: 0
FTID range: 384..879
HPFTID range: 0..63
HW TID usage: 256 IP users, 0 IPv6 users
```

The total number of connections depends on the devices used and I/O queues. For example, if the initiator connects to 2 target devices with 4 I/O queues per device (-i 4), a total of 10 NVMe-oF TOE connections are used.

## 5.4. Performance Tuning

Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.

1. Run the performance tuning script to update few kernel parameters using sysctl and map TOE queues to different CPUs.

```
[root@host~]# t4_perftune.sh -n -s -Q ofld
```

2. Set the below TOE sysctl parameters.

```
[root@host~]# sysctl -w toe.toeX_tom.max_host_sndbuf=49152  
[root@host~]# sysctl -w toe.toeX_tom.txplen=0
```

## 6. Software/Driver Unloading

Follow the steps mentioned below to unload the NVMe drivers:

On target, run the following commands:

```
[root@host~]# rmmmod nvmet-tcp
[root@host~]# rmmmod nvmet
```

On initiator, run the following commands:

```
[root@host~]# rmmmod nvme-tcp
[root@host~]# rmmmod nvme
```

To unload the TOE driver, refer to the [Software/Driver Unloading](#) section in the **Network (NIC/TOE)** chapter.

## XI. SPDK (user space) NVMe-oF TOE

---

# 1. Introduction

NVMe over Fabrics specification extends the benefits of NVMe to large fabrics, beyond the reach and scalability of PCIe. NVMe over Fabrics (NVMe-oF) based on TCP is a new technology which enables the use of NVMe-oF over existing Datacenter IP networks. The Storage Performance Development Kit (SPDK) provides an accelerated user space NVMe-oF target (RDMA and TCP transports), which provides much better performance compared with the kernel solution. Chelsio's TOE (TCP Offload Engine) is fully capable of offloading SPDK NVMe-oF TCP target processing to hardware at 100Gbps and provides a low latency, high throughput, plug-and-play Ethernet solution for connecting high-performance NVMe SSDs over a scalable, congestion controlled and traffic managed fabric, with no special configuration needed. The unique ability of a TOE to perform the full transport layer functionality in hardware is essential to obtaining tangible benefits.

 **Note** *This is supported only on T6/T5 family of adapters.*

## 1.1. Hardware Requirements

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the SPDK NVMe-oF TOE driver is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64.
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Ensure that the following NVMe/TCP components are enabled in the kernel configuration file:

```
CONFIG_NVME_CORE
CONFIG_NVME_FABRICS
CONFIG_NVME_TCP
CONFIG_NVME_TARGET
CONFIG_NVME_TARGET_TCP
CONFIG_BLK_DEV_NVME
CONFIG_BLK_DEV_NULL_BLK
CONFIG_CONFIGFS_FS
```

2. If the NVMe/TCP components are not enabled, enable them as follows:

```
CONFIG_NVME_CORE=m
CONFIG_NVME_FABRICS=m
CONFIG_NVME_TCP=m
CONFIG_NVME_TARGET=m
CONFIG_NVME_TARGET_TCP=m
CONFIG_BLK_DEV_NVME=m
CONFIG_BLK_DEV_NULL_BLK=m
CONFIG_CONFIGFS_FS=y
```

3. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

## 3. Software/Driver Installation


### 3.1. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install SPDK NVMe-oF TOE driver and NVMe utilities.

```
[root@host~]# make nvme_toe_spdk_install
```

 **Note** For more installation options, run `make help` or `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 4. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

Follow the steps mentioned below on the target machine:

1. Load the SPDK NVMe-oF TOE driver.

```
[root@host~]# modprobe chtcp
```

2. Bring up the Chelsio interface(s).

```
[root@host~]# ifconfig ethX x.x.x.x up
```

## 5. Software/Driver Configuration and Fine-tuning

### 5.1. Target

1. SPDK v24.05 LTS, customized to support TCP/IP offload and kernel bypass for SPDK NVMe-oF TCP Target is part of the Chelsio Unified Wire package. Change your current working directory to the Chelsio SPDK directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x/build/src/chspdk/user/spdk/
```

2. Configure Huge Pages.

```
[root@host~]# mkdir -p /mnt/huge
[root@host~]# echo 8192 > /proc/sys/vm/nr_hugepages
[root@host~]# echo 0 > /sys/kernel/mm/hugepages/hugepages-
1048576kB/nr_hugepages
[root@host~]# echo 8192 > /sys/kernel/mm/hugepages/hugepages-
2048kB/nr_hugepages
[root@host~]# vim /etc/fstab
nodev          /dev/hugepages          hugetlbfs pagesize=2MB  0 0
nodev          /mnt/huge                hugetlbfs pagesize=1GB  0 0
[root@host~]# mount -a
[root@host~]# NRHUGE=8192 scripts/setup.sh
```

3. Start the target.

```
[root@host spdk]# ./build/bin/nvmf_tgt -m <cpu_mask>
```

```
[root@host spdk]# ./build/bin/nvmf_tgt -m 0xFF
[2021-07-08 11:33:57.034825] Starting SPDK v21.01.1 / DPDK 20.11.0 initialization...
[2021-07-08 11:33:57.034913] [ DPDK EAL parameters: [2021-07-08 11:33:57.034939] nvmf [2021-07-08 11:33:57.034947] --no-shconf [2021-07-08 11:33:57.034953] -c
0xFF [2021-07-08 11:33:57.034960] --log-level=lib.eal:6 [2021-07-08 11:33:57.034976] --log-level=lib.cryptodev:5 [2021-07-08 11:33:57.034988] --log-level=user1
:6 [2021-07-08 11:33:57.034996] --iova-mode=pa [2021-07-08 11:33:57.035002] --base-virtaddr=0x200000000000 [2021-07-08 11:33:57.035013] --match-allocations [20
21-07-08 11:33:57.035025] --file-prefix=spdk pid117859 [2021-07-08 11:33:57.035036] ]
EAL: No available hugepages reported in hugepages-1048576kB
EAL: No legacy callbacks, legacy socket not created
[2021-07-08 11:33:57.070210] app.c: 538:spdk app start: *NOTICE*: Total cores available: 8
[2021-07-08 11:33:57.239564] reactor.c: 915:reactor_run: *NOTICE*: Reactor started on core 1
[2021-07-08 11:33:57.240112] reactor.c: 915:reactor_run: *NOTICE*: Reactor started on core 2
[2021-07-08 11:33:57.240592] reactor.c: 915:reactor_run: *NOTICE*: Reactor started on core 3
[2021-07-08 11:33:57.241106] reactor.c: 915:reactor_run: *NOTICE*: Reactor started on core 4
[2021-07-08 11:33:57.241647] reactor.c: 915:reactor_run: *NOTICE*: Reactor started on core 5
[2021-07-08 11:33:57.242140] reactor.c: 915:reactor_run: *NOTICE*: Reactor started on core 6
[2021-07-08 11:33:57.242632] reactor.c: 915:reactor_run: *NOTICE*: Reactor started on core 7
[2021-07-08 11:33:57.243086] reactor.c: 915:reactor_run: *NOTICE*: Reactor started on core 0
[2021-07-08 11:33:57.243122] accel_engine.c: 692:spdk_accel_engine_initialize: *NOTICE*: Accel engine initialized to use software engine.
```

4. Below are the sample configuration steps to create a LUN with the null device.

```
SPDK_PATH=$'ChelsioUwire-x.x.x.x/build/src/chspdk/user/spdk/'
$SPDK_PATH/scripts/rpc.py nvmf_create_transport -t TCP
$SPDK_PATH/scripts/rpc.py bdev_null_create Null0 1024 4096
$SPDK_PATH/scripts/rpc.py nvmf_create_subsystem nqn.2016-06.io.spdk:cnode0 -
a -s SPDK0000000000000000 -d SPDK_Controller0
$SPDK_PATH/scripts/rpc.py nvmf_subsystem_add_ns nqn.2016-06.io.spdk:cnode0
Null0
$SPDK_PATH/scripts/rpc.py nvmf_subsystem_add_listener nqn.2016-
06.io.spdk:cnode0 -t tcp -a 10.1.1.163 -s 4420
```

## 5.2. Initiator

---

SPDK NVMe-oF TOE target works seamlessly with SPDK NVMe-oF TCP initiator or any kernel mode initiators. Refer to the [NVMe-oF TOE Initiator](#) section for steps to connect to the target.

## 6. Software/Driver Unloading

Follow the steps mentioned below to unload the SPDK NVMe-oF TOE drivers:

On the target machine, run the following commands:

```
[root@host~]# rmmmod chtcp  
[root@host~]# rmmmod cxgb4
```

## XII. NVMe-oF/TCP PDU Offload

---

# 1. Introduction

NVMe over Fabrics specification extends the benefits of NVMe to large fabrics, beyond the reach and scalability of PCIe. NVMe over Fabrics (NVMe-oF) based on TCP is a new technology which enables the use of NVMe-oF over existing Datacenter IP networks. The vital aspect of the transport layer is process-to-process communication. It moves NVMe command, data, and completion PDU processing from the host CPU to the NIC. By handling segmentation, reassembly, and data placement in hardware, it delivers predictable low latency and higher storage IOPS at scale.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel version:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33<sup>#</sup>  
# Only Initiator is supported

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/linux-6.12.X

1. Ensure that the following NVMe/TCP components are enabled in the kernel configuration file:

```
CONFIG_NVME_CORE
CONFIG_NVME_FABRICS
CONFIG_NVME_TCP
CONFIG_NVME_TARGET
CONFIG_NVME_TARGET_TCP
CONFIG_BLK_DEV_NVME
CONFIG_BLK_DEV_NULL_BLK
CONFIG_CONFIGFS_FS
```

2. If the NVMe/TCP components are not enabled, enable them as follows:

```
CONFIG_NVME_CORE=m
CONFIG_NVME_FABRICS=m
CONFIG_NVME_TCP=m
CONFIG_NVME_TARGET=m
CONFIG_NVME_TARGET_TCP=m
CONFIG_BLK_DEV_NVME=m
CONFIG_BLK_DEV_NULL_BLK=m
CONFIG_CONFIGFS_FS=y
```

3. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

## 3. Software/Driver Loading

**Important**

*Kernel and user mode NVMe/TCP PDU offload is not supported simultaneously. Configure either Kernel mode NVMe/TCP or user mode NVMe/TCP.*

*Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

Follow the steps mentioned below on both target and initiator machines:

1. Unload the existing drivers.

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

2. To load NIC driver (cxgb4):

```
[root@host~]# modprobe cxgb4
```

3. To load NVMe-oF/TCP PDU Offload Target driver (cnvmet-tcp):

```
[root@host~]# rmmmod nvmet-tcp nvmet nvme  
[root@host~]# modprobe cnvmet-tcp
```

4. To load NVMe-oF/TCP PDU Offload Host driver (cnvme-tcp):

```
[root@host~]# rmmmod nvme-tcp nvme-fabrics nvme-core  
[root@host~]# modprobe cnvme-tcp
```

## 4. Software/Driver Configuration and Fine-tuning

The following sections describe the method to configure target and initiator.

### 4.1. Target

1. The following commands configure the target using *nvmetcli* with a LUN.

```
[root@host~]# nvmetcli
/> cd subsystems
/subsystems> create nvme-ram0
/subsystems> cd nvme-ram0/namespaces
/subsystems/n...m0/namespaces> create nsid=1
/subsystems/n...m0/namespaces> cd 1
/subsystems/n.../namespaces/1> set device path=/dev/ram1
/subsystems/n.../namespaces/1> cd ../../
/subsystems/nvme-ram0> set attr allow_any_host=1
/subsystems/nvme-ram0> cd namespaces/1
/subsystems/n.../namespaces/1> enable
/subsystems/n.../namespaces/1> cd ../../../../
/> cd ports
/ports> create 1
/ports> cd 1/
/ports/1> set addr adrfam=ipv4
/ports/1> set addr trtype=tcp
/ports/1> set addr trsvcid=4420
/ports/1> set addr traddr=102.1.1.102
/ports/1> cd subsystems
/ports/1/subsystems> create nvme-ram0
```

2. Save the target configuration to a file.

```
/ports/1/subsystems> saveconfig /root/nvme-target_setup
/ports/1/subsystems> exit
```

3. To clear the targets,

```
[root@host~]# nvmetcli clear
```

## 4.2. Initiator

### 1. Discover the target.

```
[root@host~]# nvme discover -t tcp -a <target_ip> -s 4420
```

### 2. Connect to the target.

- Connecting to a specific target.

```
[root@host~]# nvme connect -t tcp -a <target_ip> -s 4420 -n <target_name>
```

- Connecting to all targets configured on a portal.

```
[root@host~]# nvme connect-all -t tcp -a <target_ip> -s 4420
```


### 3. List the connected targets.

```
[root@host~]# nvme list
```

### 4. Format and mount the NVMe disks shown with the above command.

### 5. Disconnect from the target and unmount the disk.

```
[root@host~]# nvme disconnect -d <nvme_disk_name>
```

 **Note** *nvme\_disk\_name is the name of the device (for example, nvme0n1) and not the device path.*

## 5. Software/Driver Unloading

Follow the steps mentioned below to unload the NVMe drivers:

On target, run the following commands:

```
[root@host~]# rmmmod cnvmet-tcp
```

On initiator, run the following commands:

```
[root@host~]# rmmmod cnvme-tcp
```

To unload the TOE driver, refer to the [Software/Driver Unloading](#) section in the **Network (NIC/TOE)** chapter.

## XIII. SPDK (user space) NVMe/TCP PDU Offload

---

# 1. Introduction

The SPDK (Storage Performance Development Kit) NVMe/TCP PDU Offload enables high-performance, low-latency data transfers by moving NVMe/TCP protocol data unit (PDU) processing from the kernel to user space, allowing direct hardware acceleration on both target and host sides. By leveraging user-space drivers, zero-copy data paths, and poll-mode I/O, SPDK eliminates kernel context switching overhead and improves CPU efficiency. When combined with Chelsio adapters supporting NVMe/TCP offload, this approach delivers line-rate throughput, reduced latency, and improved scalability for storage and cloud applications, making it ideal for modern data centers requiring efficient NVMe over TCP performance.

 **Note** *This feature is only supported on Chelsio T7 family of adapters.*

## 1.1. Hardware Requirements

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapter:
    - T72200-FH\*
    - T72200\*
    - T7450\*
- \*Limited number of connections supported

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Driver Installation

Perform the following steps to install the driver:

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

To build and install SPDK (user space) NVMe/TCP PDU Offload (Target and Initiator) driver,

```
root@host~]# make cstor_pdu_spdk_install
```

 **Note** *For more installation options, run "make help" or "install.py -h".*

2. Reboot your machine for changes to take effect.

## 3. Software/Driver Loading

**! Important**

*Kernel and user mode NVMe/TCP PDU offload is not supported simultaneously. Configure either Kernel mode NVMe/TCP or user mode NVMe/TCP.*

Perform the following steps to load the driver:

1. Unload the existing drivers.

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

2. To load NIC driver (cxgb4),

```
[root@host~]# modprobe cxgb4
```

3. To load User Space NVMe/TCP PDU Offload driver (cstor),

```
[root@host~]# modprobe cstor
```

The library (libcstor.so) will be installed by the package at */lib64/*.

## 4. Configuration

### 4.1. Configuring SPDK NVMe/TCP PDU Offload

Follow the steps mentioned below on the SPDK NVMe/TCP PDU Offload target/initiator machines:

1. SPDK v24.05, customized to support NVMe/TCP PDU Offload and kernel bypass for SPDK NVMe/TCP Target and Initiator is part of Chelsio Unified Wire package. Change your current working directory to the Chelsio SPDK directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x/build/src/chspdk/spdk-24.05
```

2. Configure Huge Pages.

```
[root@host~]# mkdir -p /mnt/huge
[root@host~]# echo 8192 > /proc/sys/vm/nr_hugepages
[root@host~]# echo 0 > /sys/kernel/mm/hugepages/hugepages-
1048576kB/nr_hugepages
[root@host~]# echo 8192 > /sys/kernel/mm/hugepages/hugepages-
2048kB/nr_hugepages
[root@host~]# vim /etc/fstab
nodev      /dev/hugepages          hugetlbfs pagesize=2MB  0 0
nodev      /mnt/huge               hugetlbfs pagesize=1GB  0 0
[root@host~]# mount -a
[root@host~]# NRHUGE=8192 scripts/setup.sh
```

3. Start the reactor.

```
[root@host spdk]# ./build/bin/nvme_tgt -m <cpu_mask>
```

### 4.2. SPDK NVMe/TCP PDU Offload Target

Below are the sample configuration steps to create a LUN with Malloc bdev of 256MB.

```
SPDK_PATH='$ChelsioUwire-x.x.x.x/build/src/chspdk/spdk-24.05'
$SPDK_PATH/scripts/rpc.py nvme_create_transport -t TCP
$SPDK_PATH/scripts/rpc.py bdev_malloc_create -b Malloc1 256 512
$SPDK_PATH/scripts/rpc.py nvme_create_subsystem nqn.2016-06.io.spdk:cnodel -
a -s SPDK0000000000000001 -d SPDK_Controller1
$SPDK_PATH/scripts/rpc.py nvme_subsystem_add_ns nqn.2016-06.io.spdk:cnodel
Malloc1
```

```
$SPDK_PATH/scripts/rpc.py nvme_subsystem_add_listener nqn.2016-06.io.spdk:cnode1 -t tcp -a 102.11.11.45 -s 4420 -f ipv4
```

The SPDK NVMe/TCP PDU Offload Initiator, Kernel NVMe/TCP Initiators can connect to the configured target.

### 4.3. SPDK NVMe/TCP PDU Offload Initiator

---

SPDK NVMe/TCP PDU Offload Initiator can connect to an NVMe/TCP Target using the below steps:

```
SPDK_PATH='$ChelsioUwire-x.x.x.x/build/src/chspdk/spdk-24.05'  
$SPDK_PATH/scripts/rpc.py bdev_nvme_attach_controller -b < bdev name > -t  
TCP -a < Target IP > -f IPv4 -s 4420 -n < target NQN >
```

Example:

```
$SPDK_PATH/scripts/rpc.py bdev_nvme_attach_controller -b Nvme1 -t TCP -a  
102.11.11.86 -f IPv4 -s 4420 -n nvme-ram1
```

## 5. Software/Driver Unloading

To unload the driver, execute the following commands:

```
[root@host~]# rmmod cstor  
[root@host~]# rmmod cxgb4
```

## XIV. SPDK NVMe/TCP over Memfree TOE

---

# 1. Introduction

The SPDK (Storage Performance Development Kit) NVMe/TCP over Memfree TOE enables high-performance, low-latency data transfers by moving NVMe/TCP protocol data unit (PDU) processing from the kernel to user space, allowing direct hardware acceleration on both target and host sides. By leveraging user-space drivers, zero-copy data paths, and poll-mode I/O, SPDK eliminates kernel context switching overhead and improves CPU efficiency. When combined with Chelsio adapters supporting NVMe/TCP offload, this approach delivers line-rate throughput, reduced latency, and improved scalability for storage and cloud applications, making it ideal for modern data centers requiring efficient NVMe over TCP performance.

 **Note** *This feature is only supported on Chelsio T7 family of adapters.*

## 1.1. Hardware Requirements

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapters:
  - S72200
  - S71400
  - S7450

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel version:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4,6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Compiling and installing spdk

1. Clone the spdk folder to local.

```
[root@host~]# git clone https://github.com/spdk/spdk
```

2. Open spdk folder.

```
[root@host~]# cd spdk
```

3. Checkout v26.01 git tag.

```
[root@host~]# git checkout v26.01  
[root@host~]# git submodule update --init
```

4. Apply a patch.

```
[root@host~]# patch -p1 < ChelsioUwire-  
x.x.x.x/build/src/chspdk/patches/spdk-26.01/spdk_disable_tx_zero_copy.patch  
[root@host~]# ./configure  
[root@host~]# make
```

## 3. Software/Driver Loading

**Important**

*Kernel and user mode NVMe/TCP PDU offload is not supported simultaneously. Configure either Kernel mode NVMe/TCP or user mode NVMe/TCP.*

Perform the following steps to load the driver:

1. Unload the existing drivers.

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

2. To load Offload driver (t4\_tom),

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe t4_tom
```

## 4. Configuration

### 4.1. Configuring SPDK NVMe/TCP over Memfree TOE

Follow the steps mentioned below on the SPDK (user space) NVMe/TCP over Memfree TOE target/initiator machines:

1. Use the above compiled SPDK v26.01.

```
[root@host~]# cd spdk
```

2. Configure Huge Pages.

```
[root@host~]# mkdir -p /mnt/huge
[root@host~]# echo 8192 > /proc/sys/vm/nr_hugepages
[root@host~]# echo 0 > /sys/kernel/mm/hugepages/hugepages-
1048576kB/nr_hugepages
[root@host~]# echo 8192 > /sys/kernel/mm/hugepages/hugepages-
2048kB/nr_hugepages
[root@host~]# vim /etc/fstab
    nodev          /dev/hugepages          hugetlbfs pagesize=2MB 0 0
    nodev          /mnt/huge                hugetlbfs pagesize=1GB 0 0
[root@host~]# mount -a
[root@host~]# cd /root/spdk
[root@host~]# NRHUGE=8192 scripts/setup.sh
```

3. Start the reactor.

```
[root@host~]# build/bin/nvmf_tgt -m <cpu_mask>
```

### 4.2. SPDK NVMe/TCP over Memfree TOE Target

Below are the sample configuration steps to create a LUN with Malloc bdev of 256MB.

```
[root@host~]# cd spdk
[root@host~]# scripts/rpc.py nvmf_create_transport -t TCP
[root@host~]# scripts/rpc.py bdev_malloc_create -b Malloc1 256 512
[root@host~]# scripts/rpc.py nvmf_create_subsystem nqn.2016-
06.io.spdk:cnode1 -a -s SPDK000000000000001 -d SPDK_Controller1
[root@host~]# scripts/rpc.py nvmf_subsystem_add_ns nqn.2016-
06.io.spdk:cnode1 Malloc1
```

```
[root@host~]# scripts/rpc.py nvme_subsystem_add_listener nqn.2016-06.io.spdk:cnode1 -t tcp -a 102.11.11.45 -s 4420 -f ipv4
```

The SPDK NVMe/TCP over Memfree TOE Initiator, Kernel NVMe/TCP Initiators can connect to the configured target.

### 4.3. SPDK NVMe/TCP Over Memfree TOE Initiator

---

SPDK (user space) NVMe/TCP over Memfree TOE Initiator can connect to an NVMe/TCP Target using the below steps:

```
[root@host~]# cd spdk
[root@host~]# scripts/rpc.py bdev_nvme_attach_controller -b <bdev name> -t TCP -a <Target IP> -f IPv4 -s 4420 -n <target NQN>
```

Example:

```
[root@host~]# cd spdk
[root@host~]# scripts/rpc.py bdev_nvme_attach_controller -b Nvme1 -t TCP -a 102.11.11.45 -f IPv4 -s 4420 -n nvme-ram1
```

## XV. SoftiWARP

---

# 1. Introduction

SoftiWARP (siw) is a software iWARP kernel driver and user library for Linux that implements the iWARP protocol suite completely in software, without requiring any dedicated RDMA hardware. Due to close integration with the Linux kernel socket layer, SoftiWARP allows for efficient data transfer operations and since the implementation conforms to the iWARP protocol specification, it is wire compatible with any peer network adapter (RNIC) implementing iWARP in hardware. It offers the following advantages:

- Provides a simple path for transition of RDMA applications to the cloud platform.
- Is useful for Client/Initiator side applications such as iSER, NVMe-oF, NFSoRDMA, and LustreRDMA to connect to hardware offloaded versions on the target side.
- Supports the ability to work with any legacy switch infrastructure, enabling a decoupled server and switch upgrade cycle.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
  - S71400
  - S72200
  - S7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T62100-SO-CR
  - T62100-SO-OCP3
  - T6225-CR
  - T6225-SO-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel version:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Ensure that the following SoftiWARP component is enabled in the kernel configuration file:

```
CONFIG_RDMA_SIW
```

2. If the SoftiWARP components are not enabled, enable them as follows:

```
CONFIG_RDMA_SIW=m
```

3. Compile and install the kernel, then boot into the new kernel and install Chelsio Unified Wire.

## 3. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

Follow the steps mentioned below on the Initiator/Client machine:

1. Load the network driver (cxgb4).

```
[root@host~]# modprobe cxgb4
```

2. Load the SoftiWARP driver (siw).

```
[root@host~]# modprobe siw
```

3. Unload the iWARP RDMA offload driver (iw\_cxgb4).

```
[root@host~]# rmmod iw_cxgb4
```

## 4. Software/Driver Configuration and Fine-tuning

SoftiWARP (siw) can be used on initiators to connect to iWARP RDMA Hardware Offload iSER and NVMe-oF targets. It can also be used on NFSoRDMA, LustreRDMA clients to connect to the Hardware Offload servers.

### 4.1. Initiator/Client

**! Important**

Disable iWARP Port Mapper (*iwpm*) service on Target and Initiator.

```
[root@host~]# systemctl stop iwpm
```

1. RDMA tool (*rdma*) is used to configure the siw device. It is installed by default, from RHEL distribution. If not present in the machine, then install it from the latest [iproute2 package](#).

2. Configure the siw device.

```
[root@host~]# rdma link add <siw_device> type siw netdev <ethX>
[root@host~]# ifconfig ethX <IP address> up
```

3. Verify the configuration using *ibv\_devices*.

```
[root@~]# ibv_devices
device                node GUID
-----
siw_enp6s0f4         0007433ddb40000
```

4. The initiator/client can now connect to the target/server machines. Refer to the [NVMe-oF iWARP initiator](#) and [iSER initiator](#) sections for steps to connect to the respective targets.

## 5. Software/Driver Unloading

Follow the steps mentioned below to unload the SoftiWARP and network drivers:

```
[root@host~]# rmmmod siw  
[root@host~]# rmmmod cxgb4
```

## XVI. LIO iSCSI Target Offload

---

# 1. Introduction

Linux-IO Target (LIO) is the in-kernel SCSI target implementation in Linux. This open-source standard supports common storage fabrics, including Fibre Channel, FCoE, IEEE 1394, iSCSI, NVMe-oF, iSER, SRP, USB, vHost, etc. The LIO iSCSI fabric module implements many advanced iSCSI features that increase performance and resiliency. The LIO iSCSI Target Offload driver provides the following high-level features:

- Offloads TCP/IP
- Offloads iSCSI Header and Data Digest Calculations
- Offload Speeds at 10/25/40/50/100/200/400Gb
- Supports Direct Data Placement (DDP)
- Supports iSCSI Segmentation Offload and iSCSI PDU recovery.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel version:

- Kernel.org linux-6.12.91
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Kernel Configuration

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6

Follow the below steps to use RHEL/Rocky/AlmaLinux 10.X/9.7/9.6 version,

1. Download the kernel source RPM kernel-3.10.0-xxx.el7.src.rpm kernel-6.12.0-xxx.el10\_1.src.rpm for your distribution.
2. Install the kernel source.

```
[root@host~]# rpm -ivh kernel-6.12.0-xxx.el10_1.src.rpm
```

3. Prepare the kernel source.

```
[root@host~]# cd /root/rpmbuild/SPECS/  
[root@host~]# rpmbuild -bp kernel.spec --nodeps  
[root@host~]# cd /root/rpmbuild/BUILD/kernel-6.12.0-xxx.el10_1/linux-  
6.12.0-xxx.el10_1.x86_64/  
[root@host~]# make prepare
```

4. Copy the source to /usr/src directory.

```
[root@host~]# cp -r linux-6.12.0-xxx.el10_1 /usr/src
```

5. Proceed with driver installation as directed in the **Driver Installation** section.

### Kernel.org linux-6.18.X/6.12.X

Follow the below steps to use a 6.12.X kernel version,

1. Download the required kernel version from [kernel.org](https://kernel.org).
2. Extract the tar-ball.
3. Change your working directory to the kernel directory and run the following command to invoke the installation menu.

```
[root@host~]# make menuconfig
```

4. Select **Device Drivers > Generic Target Core Mod (TCM) and ConfigFS Infrastructure**.
5. Enable **Linux-iSCSI.org iSCSI Target Mode Stack** as a Module (if not already enabled).
6. Select **Save**.
7. Exit from the installation menu.
8. Continue with kernel installation as usual.
9. Boot into the new kernel and proceed with driver installation as directed in the **Software/Driver Installation** section.

## Ubuntu 24.04.4

Follow the below steps to use Ubuntu 24.04.4 version:

1. Install the source using apt-get.

```
[root@host~]# apt install linux-source-6.8.0*  
[root@host~]# cd /usr/src/linux-source-6.8.0  
[root@host~]# tar xf /usr/src/linux-source-6.8.0.tar.bz2
```

2. Proceed with driver installation as directed in the **Driver Installation** section.

```
[root@host~]# rpm -ivh kernel-6.12.0-xxx.el10_1.src.rpm
```

## Pre-requisites

Ensure that the following requirements are met before driver installation:

- targetcli is automatically installed by the Chelsio Unified Wire installer using the package manager yum/apt, if missing from the system. If you wish to use a different version, it is highly recommended to install v2.1.fb44 or higher versions.

## 3. Software/Driver Installation

### 3.1. Pre-requisites

Ensure that the following requirements are met before driver installation:

- *targetcli* will be automatically installed by the Chelsio Unified Wire installer using the package manager yum/apt/zypper, if missing from the system. If you wish to use a different version, it is highly recommended to install v2.1.fb44 or higher versions.

### 3.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install LIO driver and targetcli utilities.

```
[root@host~]# make lio_install
```

In case of RHEL/Rocky/AlmaLinux 10.X/9.7.9.6, the kernel source (KSRC), and kernel object (KOBJ) must be specified.

- CLI mode

```
[root@host~]# make lio_install KSRC="<kernel_source_dir>"  
KOBJ="<kernel_object_dir>"
```

- CLI mode (without Dialog utility)

```
[root@host~]# ./install.py --ksrc=<kernel_source_dir> --  
kobj=<kernel_object_dir>
```


*Example:* For RHEL 10.1,

```
[root@host~]# ./install.py --ksrc=/usr/src/linux-6.12.0-124.8.1.el10_1 --  
kobj=/lib/modules/6.12.0-124.8.1.el10_1.x86_64/build/
```

- GUI mode

```
[root@host~]# ./install.py --set-kpath
```

Provide the paths for kernel source and kernel object on the last screen of the installer. Select **OK**.

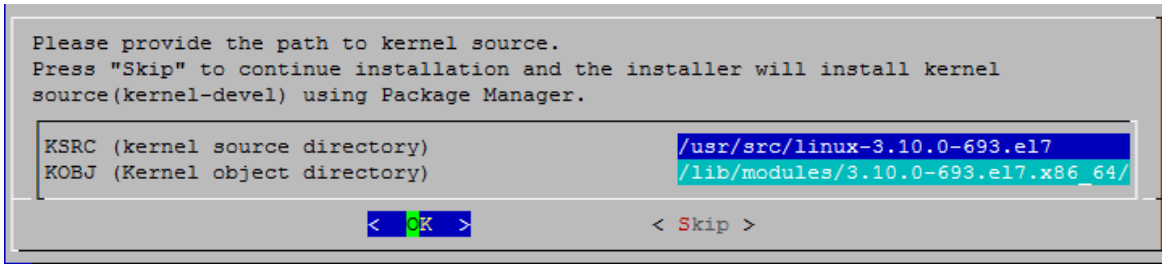

**Note** For more installation options, run `make help` or `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 4. Software/Driver Loading

**Important**

*Kernel and user mode iSCSI PDU offload is not supported simultaneously. Configure either kernel mode iSCSI or user mode iSCSI.*

*Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

The driver must be loaded by the root user. Any attempt to load the driver as a regular user may fail.

1. Load network driver (*cxgb4*).

```
[root@host~]# modprobe cxgb4
```

2. Bring up the interface.

```
[root@host~]# ifconfig ethX <IP address> up
```

3. Load the LIO iSCSI Target Offload driver (*cxgbit*).

```
[root@host~]# modprobe cxgbit
```

## 5. Software/Driver Configuration and Fine-tuning

### 5.1. Configuring LIO iSCSI Target

The LIO iSCSI Target needs to be configured before it can become useful. Refer to the *targetcli* man page using the `man targetcli` command to do so.

#### 5.1.1. Sample Configuration

Here is a sample iSCSI configuration listing a target configured with one RAM disk LUN and ACL not configured:

```
[root@ ~]# targetcli ls
o- /
  o- backstores ..... [..]
    | o- block ..... [Storage Objects: 0]
    | o- fileio ..... [Storage Objects: 0]
    | o- pscsi ..... [Storage Objects: 0]
    | o- ramdisk ..... [Storage Objects: 1]
    |   o- ramdisk01 ..... [(300.0MiB) activated]
  o- iscsi ..... [Targets: 1]
    | o- iqn.2015-12.org.linux-iscsi.lio.target1 ..... [TPGs: 1]
    |   o- tpg1 ..... [gen-acls, no-auth]
    |     | o- acls ..... [ACLs: 0]
    |     | o- luns ..... [LUNs: 1]
    |     |   | o- lun0 ..... [ramdisk/ramdisk01]
    |     |   o- portals ..... [Portals: 1]
    |     |     o- 102.10.10.216:3260 ..... [OK]
  o- loopback ..... [Targets: 0]
  o- srpt ..... [Targets: 0]
  o- vhost ..... [Targets: 0]
  o- xen_pvscsi ..... [Targets: 0]
```

### 5.2. Offloading LIO iSCSI Connection

To offload the LIO iSCSI Target,

```
[root@host~]# targetcli /iscsi/<target_iqn>/tpg1/portals/<target_ip>\:3260
enable_offload boolean=True
```

Execute the above command for every portal address listening on the Chelsio interface.

### 5.3. Running LIO iSCSI and Network Traffic Concurrently

If you wish to run network traffic with offload support (TOE) and LIO iSCSI traffic together,

1. If not done already, load the network driver with offload support (TOE).

```
[root@host~]# modprobe t4_tom
```

2. Create a new policy file.

```
[root@host~]# cat <new_policy_file>
```

3. Add the following lines to offload all traffic except LIO iSCSI:

```
listen && src port <target_listening_port> && src host <target_listening_ip>
=> !offload
all => offload
```

4. Compile the policy.


```
[root@host~]# cop -d -o <output_policy_file> <new_policy_file>
```

5. Apply the policy.

```
[root@host~]# cxgbtool ethX policy <output_policy_file>
```

*Example:*

```
[root@~]# modprobe t4_tom
[root@~]# cat policy
listen && src port 3260 && src host 102.11.11.216 => !offload
listen && src port 3260 && src host 102.22.22.216 => !offload
listen && src port 3260 && src host 0.0.0.0 => !offload
all => offload
[root@~]# cop -o /root/policy.o /root/policy
[root@~]# cxgbtool eth2 policy /root/policy.o
```

 **Note** *The policy applied using **cxgbtool** is not persistent and should be applied every time drivers are reloaded, or the machine is rebooted.*

The applied cop policies can be read using,

```
[root@host~]# cat /proc/net/offload/toeX/read-cop
```

## 5.4. Performance Tuning

1. Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.
2. Run the performance tuning script to update a few Kernel parameters using sysctl and map LIO Target queues to different CPUs.

```
[root@host~]# t4_perftune.sh -i ethX -s
```

3. For maximum performance, it is recommended to use iSCSI PDU offload initiator.
  - For MTU 9000, no additional configuration is needed.
  - For MTU 1500, set *InitialR2T* to *No* using:

```
[root@host~]# targetcli iscsi/<target_iqn>/tpg1/ set parameter InitialR2T=No
```

## 6. Software/Driver Unloading

### 6.1. Unloading the LIO iSCSI Target Offload Driver

To unload the LIO iSCSI Target Offload kernel module, follow the steps mentioned below:

1. Log out from the initiator.
2. Run the following command:

```
[root@host~]# targetcli /iscsi/<target_iqn>/tpg1/portals/<target_ip>.:3260
enable_offload boolean=False
```

Execute the above command for every portal address listening on the Chelsio interface.

3. Unload the driver.

```
[root@host~]# rmmod cxgbit
```

### 6.2. Unloading the NIC Driver

To unload the driver in NIC mode (without offload support):

```
[root@host~]# rmmod cxgb4
```

## XVII. iSCSI PDU Offload Initiator

---

# 1. Introduction

The Chelsio Unified Wire series of adapters support iSCSI acceleration and iSCSI Direct Data Placement (DDP) where the hardware handles the expensive byte touching operations, such as CRC computation and verification, and direct DMA to the final host memory destination:

- **iSCSI PDU digest generation and verification**

On transmit-side, Chelsio hardware computes and inserts the Header and Data digest into the PDUs. On receive-side, Chelsio hardware computes and verifies the Header and Data digest of the PDUs.

- **Direct Data Placement (DDP)**

Chelsio hardware can directly place the iSCSI Data-In or Data-Out PDU's payload into pre-posted destination host-memory buffers based on the Initiator Task Tag (ITT) in Data-In or Target Task Tag (TTT) in Data-Out PDUs.

- **PDU Transmit and Recovery**

On transmit-side, Chelsio hardware accepts the complete PDU (header + data) from the host driver, computes and inserts the digests, decomposes the PDU into multiple TCP segments if necessary, and transmits all the TCP segments onto the wire. It handles TCP retransmission if needed.

On receive-side, Chelsio hardware recovers the iSCSI PDU by reassembling TCP segments, separating the header and data, calculating and verifying the digests, and then forwarding the header to the host. The payload data will be directly placed into the pre-posted host DDP buffer if possible. Otherwise, the data will be sent to the host too.

The *cxgb4i* driver interfaces with open-iSCSI initiator and provides the iSCSI acceleration through Chelsio hardware wherever applicable.

## 1.1. Hardware Requirements

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR

- T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel versions:

- Kernel.org linux-6.12.91
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 1.3. Pre-requisites

---

Ensure that the following requirements are met before driver installation:

- The iSCSI PDU Offload Initiator driver (cxgb4i) runs on top of NIC driver (cxgb4) and open-iscsi version greater than 2.0-872 on a Chelsio card.
- The *openssl-devel* package must be installed.

## 2. Software/Driver Installation

### 2.1. Pre-requisites

Ensure that the following requirements are met before driver installation:

- The iSCSI PDU Offload Initiator driver (cxgb4i) runs on top of NIC driver (cxgb4) and open-iscsi version greater than 2.0-872 on a Chelsio card.
- The *openssl-devel* package must be installed.

### 2.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install open-iSCSI, iSCSI-initiator, firmware, and utilities.

```
[root@host~]# make iscsi_pdu_initiator_install
```

**i** Note For more installation options, run `make help` or `install.py -h`

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 3. Software/Driver Loading

**Important**

*Kernel and user mode iSCSI PDU offload is not supported simultaneously. Configure either kernel mode iSCSI or user mode iSCSI.*

*Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

The driver must be loaded by the root user. Any attempt to load the driver as a regular user will fail.

Run the following command to load the driver:

```
[root@host~]# modprobe cxgb4i
```

If loading of `cxgb4i` displays the **unkown symbols found** error message in `dmesg`, follow the steps mentioned below:

1. View all the loaded iSCSI modules.

```
[root@host~]# lsmod | grep iscsi
```

2. Now, unload them using the following command:

```
[root@host~]# rmmod <modulename>
```

3. Finally, reload the `cxgb4i` driver.

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Accelerating open-iSCSI Initiator

To accelerate the open-iSCSI initiator, the following steps need to be taken:

#### 4.1.1. Configuring interface (*iface*) file

Execute the following command to create the file automatically by loading *cxgb4i* driver:

```
[root@host~]# iscsiadm -m iface
```

Alternatively, you can create an interface file located under *iface* directory for the new transport class *cxgb4i* in the following format:

```
iface.iscsi_ifacename = <iface file name>
iface.hwaddress = <MAC address>
iface.transport_name = cxgb4i
iface.net_ifacename = <ethX>
iface.ipaddress = <iscsi ip address>
```

Here,

*iface.iscsi\_ifacename* : Interface file in */etc/iscsi/ifaces/*  
*iface.hwaddress* : MAC address of the Chelsio interface via which iSCSI traffic will be running.  
*iface.transport\_name* : Transport name, which is *cxgb4i*.  
*iface.net\_ifacename* : Chelsio interface via which iSCSI traffic will be running.  
*iface.ipaddress* : IP address which is assigned to the interface.

**Example:**

```
iface.iscsi_ifacename = cxgb4i.00:07:43:04:5b:da
iface.hwaddress = 00:07:43:04:5b:da
iface.transport_name = cxgb4i
iface.net_ifacename = eth3
iface.ipaddress = 102.2.2.137
```

#### Note

- i. *The interface file needs to be created in /etc/iscsi/ifaces/ directory.*
- ii. *If `iface.ipaddress` is specified, it needs to be either the same as the `ethX`'s IP address or an address on the same subnet. Make sure the IP address is unique in the network.*

## 4.1.2. Discovery and Login

### a. Starting iSCSI Daemon

Start Daemon from `/sbin` by using the following command:

```
[root@host~]# iscsid
```

**Note** *If `iscsid` is already running, then kill the service and start it as shown above after installing the Chelsio Unified Wire package.*

### b. Discovering iSCSI Targets

To discover an iSCSI target, execute the command in the following format:

```
[root@host~]# iscsiadm -m discovery -t st -p <target ip address>:<target port no> -I <cxgb4i iface file name>
```

*Example:*

```
[root@host~]# iscsiadm -m discovery -t st -p 102.2.2.155:3260 -I cxgb4i.00:07:43:04:5b:da
```

### c. Logging into an iSCSI Target

Log into an iSCSI target using the following format:

```
[root@host~]# iscsiadm -m node -T <iqn name of target> -p <target ip address>:<target port no> -I <cxgb4i iface file name> -l
```

*Example:*

```
[root@host~]# iscsiadm -m node -T iqn.2004-05.com.chelsio.target1 -p 102.2.2.155:3260,1 -I cxgb4i.00:07:43:04:5b:da -l
```

If the login fails with an error message in the format of `ERR! MaxRecvSegmentLength <X> too big. Need to be <= <Y>.` in `dmesg`, edit the `iscsi/iscsid.conf` file and change the setting for `MaxRecvDataSegmentLength`:

```
node.conn[0].iscsi.MaxRecvDataSegmentLength = 8192
```

**Important** *Always take a backup of `iscsid.conf` file before installing Chelsio Unified Wire Package. Although the file is saved to `iscsid.rpmsave` after uninstalling the package using RPM, you are still advised to take a backup.*

#### d. Logging out from an iSCSI Target

Log out from an iSCSI Target by executing a command in the following format:

```
[root@host~]# iscsiadm -m node -T <iqn name of target> -p <target ip address>:<target port no> -I <cxgb4i iface file name> -u
```

*Example:*

```
[root@host~]# iscsiadm -m node -T iqn.2004-05.com.chelsio.target1 -p 102.2.2.155:3260,1 -I cxgb4i.00:07:43:04:5b:da -u
```

**Note** Other options can be found by typing `iscsiadm --help`

g

## 4.2. HMA

To use HMA, ensure that Unified Wire is installed using the *Unified Wire (Default)* configuration tuning option.

**Note** The HMA feature is applicable only for T6 adapters.

1. Use LIO iSCSI Target in offload mode.
2. Configure MTU 9000 for Chelsio Interfaces.
3. Load the iSCSI PDU Offload Initiator driver using the following parameters.

```
[root@host~]# modprobe cxgb4i cxgb4i_snd_win=131072 cxgb4i_rcv_win=262144
```

Currently, 256 IPv4/128 IPv6 iSCSI PDU Offload Initiator connections are supported on T6 25G SO adapters. The following image shows the HMA reserved memory.

```
[root@~]# cat /sys/kernel/debug/cxgb4/0000\:05\:00.4/meminfo
EDC0:          0x0-0x3fffff [4.00 MiB]
EDC1:          0x400000-0x7fffff [4.00 MiB]
HMA:           0x800000-0x63ffff [92.0 MiB]
```

The following image shows the number of offloaded connections.

```
[root@~]# cat /sys/kernel/debug/cxgb4/0000\:02\:00.4/tids
Connections in use: 256
TID range: 64..319, in use: 256
STID range: 320..383, in use-IPv4/IPv6: 0/0
ATID range: 0..127, in use: 0
FTID range: 384..879
HPFTID range: 0..63
HW TID usage: 256 IP users, 0 IPv6 users
```

### 4.3. Auto login from cxgb4i initiator at OS bootup

For iSCSI, auto login (via *cxgb4i*) to work on OS startup, add the following line to `start()` in `/etc/rc.d/init.d/iscsid` file on RHEL:

```
modprobe -q cxgb4i
```

**Example:**

```
force_start() {
    echo -n "$Starting $prog: "
    modprobe -q iscsi_tcpmodprobe -q ib_iser
    modprobe -q cxgb4i
    modprobe -q cxgb3i
    modprobe -q bnx2i
    modprobe -q be2iscsi
    daemon brcm_iscsiuio
    daemon $prog
    retval=$?
    echo
    [ $retval -eq 0 ] && touch $lockfile
    return $retval
}
```

### 4.4. Performance Tuning

Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.

If iSCSI Initiator IRQs pose a bottleneck for multiple connections, you can improve IOPS performance using the steps mentioned below:

1. Enable iSCSI multi-queue. In 3.18+ kernels, add the below entry to the grub configuration file and reboot the machine:

```
[root@host~]# scsi_mod.use_blk_mq=1
```

2. Run the performance tuning script to update a few kernel parameters using `sysctl` and map iSCSI Initiator queues to different CPUs.

```
[root@host~]# t4_perftune.sh -Q iSCSI -n -s
```

3. Load the initiator driver.

```
[root@host~]# modprobe cxgb4i
```

## 5. Software/Driver Unloading

To unload the driver, execute the following commands:

```
[root@host~]# rmmod cxgb4i  
[root@host~]# rmmod libcxgbi
```

## XVIII. SPDK (user space) iSCSI PDU Offload

---

# 1. Introduction

The SPDK (Storage Performance Development Kit) iSCSI PDU Offload enables high-performance, low-latency data transfers by moving iSCSI protocol data unit (PDU) processing from the kernel to user space, allowing direct hardware acceleration on both target and host sides. By leveraging user-space drivers, zero-copy data paths, and poll-mode I/O, SPDK eliminates kernel context switching overhead and improves CPU efficiency. When combined with Chelsio adapters supporting iSCSI offload, this approach delivers line-rate throughput, reduced latency, and improved scalability for storage and cloud applications, making it ideal for modern data centers requiring efficient iSCSI performance.

 **Note** *This feature is only supported on Chelsio T7 family of adapters.*

## 1.1. Hardware Requirements

---

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4,6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Driver Installation

Perform the following steps to install the driver:

3. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

To build and install SPDK (user space) iSCSI PDU Offload (Target and Initiator) driver,

```
[root@host~]# make cstor_pdu_spdk_install
```

 **Note** *For more installation options, run "make help" or "install.py -h".*

4. Reboot your machine for changes to take effect.

## 3. Software/Driver Loading



**Important** *Kernel and user mode iSCSI PDU offload is not supported simultaneously. Configure either kernel mode iSCSI or user mode iSCSI.*

Perform the following steps to load the driver:

1. Unload the existing drivers.

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

2. To load NIC driver (cxgb4),

```
[root@host~]# modprobe cxgb4
```

3. To load SPDK (user space) iSCSI PDU Offload driver (cstor),

```
[root@host~]# modprobe cstor
```

The library (libcstor.so) will be installed by the package at */lib64/*.

## 4. Configuration

### 4.1. Configuring SPDK iSCSI PDU Offload target/initiator

Follow the steps mentioned below on the SPDK iSCSI PDU Offload target/initiator machines:

1. SPDK v24.05, customized to support iSCSI PDU Offload and kernel bypass for SPDK iSCSI Target and Initiator is part of the Chelsio Unified Wire package. Change your current working directory to the Chelsio SPDK directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x/build/src/chspdk/spdk-24.05
```

2. Configure Huge Pages.

```
[root@host~]# mkdir -p /mnt/huge
[root@host~]# echo 8192 > /proc/sys/vm/nr_hugepages
[root@host~]# echo 0 > /sys/kernel/mm/hugepages/hugepages-1048576kB/nr_hugepages
[root@host~]# echo 8192 > /sys/kernel/mm/hugepages/hugepages-2048kB/nr_hugepages
[root@host~]# vim /etc/fstab
          nodev          /dev/hugepages          hugetlbfs pagesize=2MB 0 0
nodev          /mnt/huge              hugetlbfs pagesize=1GB 0 0
[root@host~]# mount -a
[root@host~]# NRHUGE=8192 scripts/setup.sh
```

3. Start the reactor.

```
[root@host spdk]# ./build/bin/iscsi_tgt -m <cpu_mask>
```

### 4.2. SPDK iSCSI PDU Offload Target

Below are the sample configuration steps to create a LUN with Malloc bdev of 256MB.

```
[root@host~]# SPDK_PATH='$ChelsioUwire-x.x.x.x/build/src/chspdk/spdk-24.05'
[root@host~]# $SPDK_PATH/scripts/rpc.py bdev_malloc_create -b Malloc1 256 512
[root@host~]# $SPDK_PATH/scripts/rpc.py iscsi_create_portal_group 1 102.11.11.45:3260
[root@host~]# $SPDK_PATH/scripts/rpc.py iscsi_create_initiator_group 2 ANY
[root@host~]# $SPDK_PATH/scripts/rpc.py iscsi_create_target_node disk1 "Data Disk1"
"Malloc1:0" 1:2 64 -d
```

The SPDK iSCSI PDU Offload Initiator, Kernel iSCSI PDU Offload or Open-iSCSI Initiators can connect to the configured target.

### 4.3. SPDK iSCSI PDU Offload Initiator

SPDK iSCSI PDU Offload Initiator can connect to an iSCSI Target using the below steps:

```
[root@host~]# SPDK_PATH='$'ChelsioUwire-x.x.x.x/build/src/chspdk/spdk-24.05'  
[root@host~]# $SPDK_PATH/scripts/rpc.py bdev_iscsi_create -b <bdev_name> -i  
<INITIATOR_IQN> --url <iSCSI_LUN_URL>
```

Example:

```
[root@host~]# $SPDK_PATH/scripts/rpc.py bdev_iscsi_create -b iSCSI1 -i iqn.2016-  
06.io.spdk:init1  
--url 'iscsi://102.11.11.45/iqn.2000-  
01.com.chelsio.host:"1"/0?header_digest=crc32c&data_digest=crc32c'
```

## 5. Software/Driver Unloading

To unload the driver, execute the following commands:

```
[root@host~]# rmmod cstor  
[root@host~]# rmmod cxgb4
```

## XIX. SPDK (user space) iSCSI over Memfree TOE

---

# 1. Introduction

The SPDK (Storage Performance Development Kit) iSCSI enables high-performance, low-latency data transfers by moving iSCSI protocol data unit (PDU) processing from the kernel to user space, allowing direct hardware acceleration on both target and host sides. By leveraging user-space drivers, zero-copy data paths, and poll-mode I/O, SPDK eliminates kernel context switching overhead and improves CPU efficiency. When combined with Chelsio adapters supporting iSCSI offload, this approach delivers line-rate throughput, reduced latency, and improved scalability for storage and cloud applications, making it ideal for modern data centers requiring efficient iSCSI performance.

**Note** *This feature is only supported on Chelsio T7 family of adapters.*

## 1.1. Hardware Requirements

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapters:
  - S72200
  - S71400
  - S7450

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* SPDK (user space) iSCSI over Memfree TOE (Target) is supported on 6.18.21 only if iommu is enabled.

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Compiling and installing spdk

Perform the following steps to compile and install the driver:

1. Clone the spdk folder to local.

```
[root@host~]# git clone https://github.com/spdk/spdk
```

2. Open spdk folder.

```
[root@host~]# cd spdk
```

3. Checkout v26.01 git tag.

```
[root@host~]# git checkout v26.01  
[root@host~]# git submodule update --init
```

4. Apply a patch on the spdk repo.

```
[root@host~]# cd spdk  
[root@host~]# patch -p1 < ChelsioUwire-  
x.x.x.x/build/src/chspdk/patches/spdk-26.01/spdk_disable_tx_zero_copy.patch  
[root@host~]# ./configure  
[root@host~]# make
```

## 3. Software/Driver Loading

**! Important** *Kernel and user mode iSCSI PDU offload is not supported simultaneously. Configure either kernel mode iSCSI or user mode iSCSI.*

Perform the following steps to load the driver:

1. Unload the existing drivers.

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

2. To load Offload driver (t4\_tom),

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe t4_tom
```

## 4. Configuration

### 4.1. Configuring SPDK iSCSI over Memfree TOE target

Follow the steps mentioned below on the iSCSI over Memfree TOE target/initiator machines:

1. Change your current working directory to the SPDK 26.01 directory.

```
[root@host~]# cd spdk
```

2. Configure Huge Pages.

```
[root@host~]# mkdir -p /mnt/huge
[root@host~]# echo 8192 > /proc/sys/vm/nr_hugepages
[root@host~]# echo 0 > /sys/kernel/mm/hugepages/hugepages-1048576kB/nr_hugepages
[root@host~]# echo 8192 > /sys/kernel/mm/hugepages/hugepages-2048kB/nr_hugepages
[root@host~]# vim /etc/fstab
    nodev          /dev/hugepages          hugetlbfs pagesize=2MB 0 0
    nodev          /mnt/huge               hugetlbfs pagesize=1GB 0 0
[root@host~]# mount -a
[root@host~]# cd /root/spdk
[root@host~]# NRHUGE=8192 scripts/setup.sh
```

3. Start the reactor.

```
[root@host~]# build/bin/iscsi_tgt -m <cpu_mask> &
```

### 4.2. SPDK iSCSI over Memfree TOE Target

Below are the sample configuration steps to create 1 SPDK iSCSI over Memfree TOE Target.

```
[root@host~]# cd spdk
[root@host~]# scripts/rpc.py bdev_malloc_create -b Malloc1 256 512
[root@host~]# scripts/rpc.py iscsi_create_portal_group 1 102.11.11.45:3260
[root@host~]# scripts/rpc.py iscsi_create_initiator_group 2 ANY
[root@host~]# scripts/rpc.py iscsi_create_target_node disk1 "Data Disk1" "Malloc1:0"
1:2 64 -d
```

The Kernel iSCSI PDU Offload or Open-iSCSI Initiators can connect to the configured target.

## XX. Crypto Offload

---

# 1. Introduction

Chelsio's Terminator 6 (T6) Unified Wire ASIC enables concurrent secure communication and secure storage with support for integrated TLS/SSL and inline cryptographic functions, leveraging the proprietary TCP/IP offload engine. Chelsio's full offload TLS/SSL is uniquely capable of 100Gb line-rate performance.

In addition, the accelerator can be used in a traditional co-processor Lookaside mode to accelerate TLS/SSL, IPsec, SMB 3.X crypto, data at rest encryption/decryption, and data-deduplication fingerprint computation.

## 1.1. Hardware Requirements

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapters
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T62100-SO-CR\*
  - T62100-SO-OCP3\*
  - T6225-CR
  - T6225-SO-CR\*

\* Only Co-processor supported

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Crypto Offload driver is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Enable the following options in the kernel configuration file:

```
CONFIG_KEYS=y
CONFIG_KEYS_DEBUG_PROC_KEYS=y
CONFIG_SECURITY=y
CONFIG_SECURITY_NETWORK=y
CONFIG_SECURITY_NETWORK_XFRM=y
CONFIG_LSM_MMAP_MIN_ADDR=65536
CONFIG_SECURITY_SELINUX=y
CONFIG_SECURITY_SELINUX_BOOTPARAM=y
CONFIG_SECURITY_SELINUX_BOOTPARAM_VALUE=1
CONFIG_SECURITY_SELINUX_DISABLE=y
CONFIG_SECURITY_SELINUX_DEVELOP=y
CONFIG_SECURITY_SELINUX_AVC_STATS=y
CONFIG_SECURITY_SELINUX_CHECKREQPROT_VALUE=1
CONFIG_DEFAULT_SECURITY_SELINUX=y
CONFIG_DEFAULT_SECURITY="selinux"
CONFIG_CRYPT=y
CONFIG_CRYPT_FIPS=y
CONFIG_CRYPT_ALGAPI=y
CONFIG_CRYPT_ALGAPI2=y
CONFIG_CRYPT_AEAD=y
CONFIG_CRYPT_AEAD2=y
CONFIG_CRYPT_BLKCPHER=y
CONFIG_CRYPT_BLKCPHER2=y
CONFIG_CRYPT_HASH=y
CONFIG_CRYPT_HASH2=y
CONFIG_CRYPT_RNG=y
CONFIG_CRYPT_RNG2=y
CONFIG_CRYPT_PCOMP=y
CONFIG_CRYPT_PCOMP2=y
CONFIG_CRYPT_MANAGER=y
CONFIG_CRYPT_MANAGER2=y
CONFIG_CRYPT_NULL=y
CONFIG_CRYPT_WORKQUEUE=y
CONFIG_CRYPT_CRYPTD=y
CONFIG_CRYPT_AUTHENC=y
CONFIG_CRYPT_TEST=m
CONFIG_CRYPT_CCM=y
CONFIG_CRYPT_GCM=y
CONFIG_CRYPT_SEQIV=y
CONFIG_CRYPT_CBC=y
CONFIG_CRYPT_CTR=y
```

```
CONFIG_CRYPTO_CTS=y
CONFIG_CRYPTO_ECB=y
CONFIG_CRYPTO_XTS=y
CONFIG_CRYPTO_HMAC=y
CONFIG_CRYPTO_GHASH=y
CONFIG_CRYPTO_MD4=m
CONFIG_CRYPTO_MD5=y
CONFIG_CRYPTO_SHA1=y
CONFIG_CRYPTO_SHA256=y
CONFIG_CRYPTO_SHA512=y
CONFIG_CRYPTO_AES=y
CONFIG_CRYPTO_AES_X86_64=y
CONFIG_CRYPTO_DEFLATE=y
CONFIG_CRYPTO_ZLIB=y
CONFIG_CRYPTO_LZO=y
CONFIG_CRYPTO_ANSI_CPRNG=y
CONFIG_CRYPTO_USER_API=y
CONFIG_CRYPTO_USER_API_HASH=y
CONFIG_CRYPTO_USER_API_SKCIPHER=y
CONFIG_CRYPTO_USER_API_RNG=y
CONFIG_CRYPTO_USER_API_AEAD=m
CONFIG_CRYPTO_HW=y
```

2. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

## 3. Software/Driver Installation

### 3.1. Pre-requisites

Ensure that SELinux and the firewall are disabled.


### 3.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install the Crypto driver.

```
[root@host~]# make crypto_install
```

 **Note** *For more installation options, run* `make help` *or* `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 4. Software/Driver Loading

**Important** Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

### 4.1. Inline

1. To load the Crypto Offload driver in Inline mode,

```
[root@host~]# modprobe t4_tom
```

2. Bring up the Chelsio network interface.

```
[root@host~]# ifconfig ethX up
```

Where *ethX* is the Chelsio interface.

### 4.2. Co-processor

1. To load the Crypto Offload driver in Co-processor mode (*chcr*).

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe chcr
```

2. Bring up the Chelsio network interface.

```
[root@host~]# ifconfig ethX up
```

Where *ethX* is the Chelsio interface.

To view the complete list of supported cryptographic algorithms, use the following command:

```
[root@host~]# cat /proc/crypto|grep -i chcr
```

The following applications can be offloaded by Chelsio Co-processor:

- TLS/SSL
- nginx
- IPsec
- ip xfrm
- Strongswan

## 5. Software/Driver Configuration and Fine-tuning

### 5.1. Configuring OpenSSL

Install the OpenSSL v3.5.14 with kTLS support and do the configuration, follow the below mentioned steps:

1. Download the OpenSSL v3.5.4, compile with kTLS support and install it.

```
[root@host~]# wget
https://github.com/openssl/openssl/releases/download/openssl-3.5.4/openssl-3.5.4.tar.gz
[root@host~]# tar xf openssl-3.5.4.tar.gz
[root@host~]# cd openssl-3.5.4
[root@host~]# ./config shared enable-ktls --prefix=/root/sslsv3-ktls --
openssldir=/root/sslsv3-ktls -Wl,-R/root/sslsv3-ktls/lib64
[root@host~]# make && make install
```

2. Update *openssl.cnf* to enable kTLS during runtime.

```
[root@host~]# vim /root/sslsv3-ktls/openssl.cnf
...
[openssl_init]
providers = provider_sect
ssl_conf = ssl_section
[ssl_section]
system_default = system_default_section
[system_default_section]
options = ktls
```

Ensure that the following requirements are met for connections to be offloaded:

- TLS version should be v1.2
- Cipher should be AES128-GCM-SHA256

3. Compile and install nginx.

```
[root@host ~]# tar xf nginx-1.28.0.tar.gz
[root@host ~]# cd nginx-1.28.0/
[root@host nginx-1.28.0]# ./configure --prefix=/usr/local/nginx-openssl-ktls
--with-http_ssl_module --with-http_v2_module --with-http_dav_module --with-
cc-opt="-DNGX_SSL_SENDFILE -DOPENSSL_API_COMPAT=10101 -I /root/openssl-
3.5.4/include/" --with-ld-opt="-L/root/sslsv3-ktl/lib64 -Wl,-R/root/sslsv3-
ktl/lib64"
[root@host nginx-1.28.0]# make && make install
```

4. Configure the nginx server by updating the required settings in */usr/local/nginx/nginx.conf* file.

5. Start nginx server.

```
[root@host~]# /usr/local/nginx-openssl-ktls/nginx
```

The nginx server will be offloaded by Chelsio Co-processor now.

6. The Client can now connect to the Server and download the files.

## 5.2. Co-processor IPsec Offload

### 5.2.1. Configuration

- Note**
- *DUT is the machine equipped with a T7 card.*
  - *PEER is the corresponding companion machine.*

### 5.2.2. Using ip xfrm

1. Establish IPsec SAs and Policies using the commands below.
  - a. On DUT

```
[root@DUT~]# ip xfrm state add src $DUT_IP dst $PEER_IP proto esp
spi 0x0a1b2c3d reqid 0x5f7c1a6b mode transport aead
"rfc4106(gcm(aes))" 0x0f83e4cb43bd443a839bef61378d294577386f72 128
sel src 0.0.0.0/0 dst 0.0.0.0/0 replay-window 128 flag esn

[root@DUT~]# ip xfrm state add src $PEER_IP dst $DUT_IP proto esp
spi 0x4e5f6a7b reqid 0x9abcdef0 mode transport aead
"rfc4106(gcm(aes))" 0x0f83e4cb43bd443a839bef61378d294577386f72 128
sel src 0.0.0.0/0 dst 0.0.0.0/0 replay-window 128 flag esn

[root@DUT~]# ip xfrm policy add src $DUT_IP dst $PEER_IP dir out
tmpl src $DUT_IP dst $PEER_IP proto esp reqid 0x5f7c1a6b mode
transport

[root@DUT~]# ip xfrm policy add src $PEER_IP dst $DUT_IP dir fwd
tmpl src $PEER_IP dst $DUT_IP proto esp reqid 0x9abcdef0 mode
transport

[root@DUT~]# ip xfrm policy add src $PEER_IP dst $DUT_IP dir in tmpl
src $PEER_IP dst $DUT_IP proto esp reqid 0x9abcdef0 mode transport
```

- Note** *ethX refers to the interface of DUT adapters.*

- b. On PEER

```
[root@PEER~]# ip xfrm state add src $DUT_IP dst $PEER_IP proto esp
spi 0x0a1b2c3d reqid 0x5f7c1a6b mode transport aead
'rfc4106(gcm(aes))' 0x0f83e4cb43bd443a839bef61378d294577386f72 128
sel src 0.0.0.0/0 dst 0.0.0.0/0 replay-window 128 flag esn

[root@PEER~] ip xfrm state add src $PEER_IP dst $DUT_IP proto esp
spi 0x4e5f6a7b reqid 0x9abcdef0 mode transport aead
'rfc4106(gcm(aes))' 0x0f83e4cb43bd443a839bef61378d294577386f72 128
sel src 0.0.0.0/0 dst 0.0.0.0/0 replay-window 128 flag esn"
```

```
[root@PEER~]# ip xfrm policy add src $PEER_IP dst $DUT_IP dir out
tmpl src $PEER_IP dst $DUT_IP proto esp reqid 0x9abcdef0 mode
transport

[root@PEER~]# ip xfrm policy add src $DUT_IP dst $PEER_IP dir fwd
tmpl src $DUT_IP dst $PEER_IP proto esp reqid 0x5f7c1a6b mode
transport

[root@PEER~]# ip xfrm policy add src $DUT_IP dst $PEER_IP dir in
tmpl src $DUT_IP dst $PEER_IP proto esp reqid 0x5f7c1a6b mode
transport
```

## 2. Verify SA and policy status:

```
[root@DUT~]# ip xfrm state list
```


### 5.2.3. Using StrongSwan

#### 1. Deploy certificates to DUT and PEER.

```
/usr/local/etc/swanctl/private/ # Private Keys of respective hosts
/usr/local/etc/swanctl/x509/    # Host Certificates of respective hosts
usr/local/etc/swanctl/x509ca/  # CA Certificate
```

#### 2. Configure "/usr/local/etc/strongswan.conf" (enable "make\_before\_break = yes").

```
[root@DUT~]# cat /usr/local/etc/strongswan.conf
charon {
    load_modular = yes
    plugins {
        include strongswan.d/charon/*.conf
        make_before_break = yes          # <----- Append
"make_before_break" parameter
    }
}
```

 **Note** *"make\_before\_break" ensures seamless tunnel rekeying by creating a new SA before tearing down the old one, preventing traffic disruption.*

3. Update `"/usr/local/etc/swanctl/swanctl.conf"` on both the DUT and PEER according to their IP configurations.
  - a. DUT Machine

```
[root@DUT~]# cat /usr/local/etc/swanctl/swanctl.conf
connections {
  gw-port0 {
    local_addrs = <DUT_IP>
    remote_addrs = <PEER_IP>

    local {
      auth = pubkey
      certs = dut-Cert.der
      id = C=CH, O=test.ipsec.tunnel, CN=dut-common-name
    }

    remote {
      auth = pubkey
      id = C=CH, O=test.ipsec.tunnel, CN=peer-common-name
    }

    children {
      net-net-0 {
        rekey_time = 4000000
        esp_proposals = aes128gcm128-esn-noesn
        hw_offload = no
        mode = tunnel
      }
    }

    version = 2
    mobike = no
    rekey_time = 8500000
    reauth_time = 9000000
    proposals = aes256-sha1-x25519
  }
}
```

**b. PEER Machine**

```
[root@PEER~]# cat /usr/local/etc/swanctl/swanctl.conf
connections {
  gw-port0 {
    local_addrs = <PEER_IP>
    remote_addrs = <DUT_IP>
    local {
      auth = pubkey
      certs = peer-Cert.der
      id = C=CH, O=test.ipsec.tunnel, CN=peer-common-name
    }
    remote {
      auth = pubkey
      id = C=CH, O=test.ipsec.tunnel, CN=dut-common-name
    }
    children {
      net-net-0 {
        rekey_time = 5000000
        esp_proposals = aes128gcm128-esn-noesn
        hw_offload = no
        mode = tunnel
      }
    }
    version = 2
    mobike = no
    rekey_time = 11000000
    reauth_time = 12000000
    proposals = aes256-sha1-x25519
  }
}
```

**4. Start and load configurations on both DUT and PEER Machines.**

```
[root@DUT~]# /usr/local/libexec/ipsec/charon
[root@DUT~]# swanctl --load-creds
[root@DUT~]# swanctl --load-conns
```

5. Initiate connection from DUT.

```
[root@DUT~]# swanctl -i -c net-net-0
```

6. Verify connection.

```
[root@DUT~]# swanctl --list-sas -P
```

## 5.3. Inline TLS Offload

### 5.3.1. Configure TLS Offload and TOE Ports

To configure Inline TLS Offload, the connection offload policy should be used with the required TCP port numbers. Follow the steps mentioned below:

1. Create a new policy file and add the following line for each TCP port (to be TLS offloaded).

```
src or dst port <tcp_port> => offload tls mss 32 bind random
.
.
all => offload
```

The *all => offload* is added to ensure that the rest of the TCP ports will be regular TOE offloaded.

*Example:* To TLS offload TCP ports 443, 989, 1000, 1001, and 1002,

```
[root@host ~]# cat new_policy_file
src or dst port 443 => offload tls mss 32 bind random
src or dst port 989 => offload tls mss 32 bind random
src or dst port 1000 => offload tls mss 32 bind random
src or dst port 1001 => offload tls mss 32 bind random
src or dst port 1002 => offload tls mss 32 bind random
all => offload
```

Alternatively, portrange can be used to define a range of TCP ports (to be TLS offloaded).

```
src or dst portrange <M-N> => offload tls mss 32 bind random
all => offload
```

*Example:* To TLS offload TCP ports 443-900, create the below policy file.

```
[root@host ~]# cat new_policy_file
src or dst portrange 443-900 => offload tls mss 32 bind random
all => offload
```

## 2. Compile the policy.

```
[root@host~]# cop -d -o <policy_out> <new_policy_file>
```

```
[root@host ~]# cop -d -o policy_out new_policy_file
policy rules read:
rule 0: src or dst port 443 => offload tls mss 32 bind random
rule 1: src or dst port 989 => offload tls mss 32 bind random
rule 2: src or dst port 1000 => offload tls mss 32 bind random
rule 3: src or dst port 1001 => offload tls mss 32 bind random
rule 4: src or dst port 1002 => offload tls mss 32 bind random
rule 5: all => offload

classifier program:
0 8/01bb0000%ffff0000 yes->[0] no->step 1
1 8/000001bb%0000ffff yes->[0] no->step 2
2 8/03dd0000%ffff0000 yes->[1] no->step 3
3 8/000003dd%0000ffff yes->[1] no->step 4
4 8/03e80000%ffff0000 yes->[2] no->step 5
5 8/000003e8%0000ffff yes->[2] no->step 6
6 8/03e90000%ffff0000 yes->[3] no->step 7
7 8/000003e9%0000ffff yes->[3] no->step 8
8 8/03ea0000%ffff0000 yes->[4] no->step 9
9 8/000003ea%0000ffff yes->[4] no->[5]

optimized classifier program:
0 8 #1 ffff0000 yes->[0] no->step 5
4 01bb0000
5 8 #1 0000ffff yes->[0] no->step 10
9 000001bb
10 8 #1 ffff0000 yes->[1] no->step 15
14 03dd0000
15 8 #1 0000ffff yes->[1] no->step 20
19 000003dd
20 8 #1 ffff0000 yes->[2] no->step 25
24 03e80000
25 8 #1 0000ffff yes->[2] no->step 30
29 000003e8
30 8 #1 ffff0000 yes->[3] no->step 35
34 03e90000
35 8 #1 0000ffff yes->[3] no->step 40
39 000003e9
40 8 #1 ffff0000 yes->[4] no->step 45
44 03ea0000
45 8 #1 0000ffff yes->[4] no->[5]
49 000003ea

offload settings:
0: offload 1, ddp -1, coalesce -1, cong_algo -1, queue -2, class -1, tstamp -1, sack -1, tls 1, nagle -1, mss 32
1: offload 1, ddp -1, coalesce -1, cong_algo -1, queue -2, class -1, tstamp -1, sack -1, tls 1, nagle -1, mss 32
2: offload 1, ddp -1, coalesce -1, cong_algo -1, queue -2, class -1, tstamp -1, sack -1, tls 1, nagle -1, mss 32
3: offload 1, ddp -1, coalesce -1, cong_algo -1, queue -2, class -1, tstamp -1, sack -1, tls 1, nagle -1, mss 32
4: offload 1, ddp -1, coalesce -1, cong_algo -1, queue -2, class -1, tstamp -1, sack -1, tls 1, nagle -1, mss 32
5: offload 1, ddp -1, coalesce -1, cong_algo -1, queue -2, class -1, tstamp -1, sack -1, tls 0, nagle -1, mss 0
6: offload 0, ddp -1, coalesce -1, cong_algo -1, queue -2, class -1, tstamp -1, sack -1, tls 0, nagle -1, mss 0
```

## 3. Apply the policy.

```
[root@host~]# cxgbtool <iface> policy <policy_out>
```

```
[root@ ~]# cxgbtool enp129s0f4 policy policy_out
```

Upon applying the above policy, traffic on all the mentioned TCP ports are TLS offloaded, while traffic on other TCP ports are TOE offloaded.

**Note** *The policy applied using cxgbtool is not persistent and should be applied every time drivers are reloaded or the machine is rebooted.*

The applied cop policies can be read using,

```
[root@host~]# cat /proc/net/offload/toeX/read-cop
```

### 5.3.2. Configuring and running Applications

The below sections assume that openssl with kTLS support is installed at `/root/ssl3-ktls` as mentioned in [Configuring OpenSSL](#). If you wish to use your own openssl with kTLS support, replace `/root/ssl3-ktls` with the corresponding location.

- **OpenSSL tool**

1. Start TLS offload Server.

```
[root@host~]# cd /root/ssl3-ktls/bin
[root@host~]# ./openssl s_server -key <key_file> -cert <cert_file> -accept
<server_ip>:<port> -cipher AES128-GCM-SHA256 -WWW -4 -tls1_2
```

2. Start TLS offload Client.

```
[root@host~]# cd /root/ssl3-ktls/bin
[root@host~]# ./openssl s_time -connect <server_ip>:<port> -www /<file>
```

```
[root@host bin]# ./openssl s_time -connect 102.1.1.154:443 -www /1G
No CIPHER specified
```

In case of IPv6, the address should be specified within [].

```
[root@host bin]# ./openssl s_time -connect '[1000::157]:443' -www /1K
No CIPHER specified
```

### Custom Applications

To compile custom applications using OpenSSL library,

```
[root@host~]# gcc -g -o <server/client output file> <server/client file> -
lcrypto -lssl -L/root/ssl3-ktls/lib64/
```

Client:

```
[root@host ~]# gcc -g -o client client.c -lcrypto -lssl -L/usr/openssl3/lib64/
```

Server:

```
[root@host ~]# gcc -g -o server server.c -lcrypto -lssl -L/usr/openssl3/lib64/
```

- **nginx server**

1. Download the latest stable version from [nginx website](#).
2. Compile nginx with the OpenSSL library and install it.

```
[root@host~]# cd nginx-x.xx.x
[root@host~]# ./configure --prefix=/usr/local/nginx --with-http_ssl_module -
-with-http_v2_module --with-http_dav_module --with-cc-opt="-
DNGX_SSL_SENDFILE -DOPENSSL_API_COMPAT=10101 -I /root/ssl3-ktls/include" --
with-ld-opt="-L/root/ssl3-ktls/lib64 -Wl,-R/root/ssl3-ktls/lib64" && make
&& make install
```

3. Configure the nginx server by updating required settings in `/usr/local/nginx/nginx.conf` file.
4. Update the below in `/usr/local/nginx/nginx.conf` file.

```
http {
    ...
    ssl_protocols          TLSv1.2;
    ssl_ciphers    AES128-GCM-SHA256;
    ssl_prefer_server_ciphers    on;
    ...
}
```

5. Load Chelsio Inline drivers and configure nginx server port as a TLS Offload port as described in the [Configure TLS Offload and TOE Ports](#) section.
6. Start nginx server.

```
[root@host~]# ./usr/local/nginx/nginx
```

The nginx server will be Inline TLS offloaded now.

7. The Client can now connect to the Server and download the files.

### 5.3.3. Inline TLS Counters

To verify whether Chelsio Inline Crypto is used, run the following command:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<PF4_id>/tls
Chelsio Inline TLS Stats
TLS PDU Tx: 32661534
TLS PDU Rx: 231039210
TLS Keys (DDR) Count: 48
```

## 5.4. Co-processor

To view the complete list of supported cryptographic algorithms, use the following command:

```
[root@host~]# cat /proc/crypto|grep -i chcr
```

The following applications can be offloaded by Chelsio Co-processor:

- TLS/SSL
  - Nginx
- IPsec
  - Ip xfrm
  - Strongswan

### 5.4.1. Co-processor TLS Offload

This section assumes that openssl with kTLS support is installed at `/root/ssl3-ktls` as mentioned in the [Configuring OpenSSL](#) section. If you wish to use your own openssl with kTLS support, replace `/root/ssl3-ktls` with the corresponding location.

- **nginx server**

1. Download the latest stable version from the [nginx website](#).
2. Compile and install nginx.

```
[root@host~]# cd nginx-x.xx.x
[root@host~]# ./configure --prefix=/usr/local/nginx --with-http_ssl_module --
with-http_v2_module --with-http_dav_module --with-cc-opt="-DNGX_SSL_SENDFILE
-DOPENSSL_API_COMPAT=10101 -I /root/ssl3-ktls/include" --with-ld-opt="-
L/root/ssl3-ktls/lib64 -Wl,-R/root/ssl3-ktls/lib64" && make && make install
```

3. Configure the nginx server by updating the required settings in `/usr/local/nginx/nginx.conf` file.
4. Load the Chelsio Co-processor, Kernel TLS drivers and bring up the interface.

```
[root@host~]# modprobe tls
[root@host~]# modprobe chcr
[root@host~]# ifconfig ethX <IPv4/IPv6 address> up
```

5. Start nginx server.

```
[root@host~]# ./usr/local/nginx/nginx
```

The nginx server will be offloaded by Chelsio Co-processor now.

6. The Client can now connect to the Server and download the files.

### 5.4.2. Co-processor IPsec Offload

Encryption and decryption processing for IPsec can be offloaded to T6 adapters by the coprocessor driver (chcr). Both Tunnel and Transport IPsec modes are supported with ESP and AH protocols. The driver supports both Tx and Rx offload. Follow the steps mentioned below to configure co-processor IPsec offload using `ip xfrm`.

1. Load the Chelsio Co-processor driver.

```
[root@host~]# modprobe chcr
```

2. Configure IP Alias on Chelsio interfaces for multiple tunnels (8 in this case).

```
[root@host~]# for i in `seq 1 8`; do ifconfig ethX:$i $i.0.0.1/24 up;done
```

3. Configure `ip xfrm` using below scripts.

**DUT**

```

for i in `seq 1 8`
do
    local_ip=$i.0.0.1
    remote_ip=$i.0.0.2

    ip xfrm state add src $remote_ip dst $local_ip proto esp spi 0x54fa1f$i
    reqid 16385 mode transport aead "rfc4106(gcm(aes))"
    0x010203047aeaca3f87d060a12f4a4487d5a5c335 96 sel src 0.0.0.0/0 dst
    0.0.0.0/0 replay-window 64 flag esn
    ip xfrm state add src $local_ip dst $remote_ip proto esp spi 0x53fa1f$i
    reqid 16386 mode transport aead "rfc4106(gcm(aes))"
    0x010203047aeaca3f87d060a12f4a4487d5a5c335 96 sel src 0.0.0.0/0 dst
    0.0.0.0/0 replay-window 64 flag esn
    ip xfrm policy add src $local_ip dst $remote_ip dir out tmpl src $local_ip
    dst $remote_ip proto esp reqid 16386 mode transport
    ip xfrm policy add src $local_ip dst $remote_ip dir fwd tmpl src $local_ip
    dst $remote_ip proto esp reqid 16385 mode transport
    ip xfrm policy add src $local_ip dst $remote_ip dir in tmpl src $local_ip
    dst $remote_ip proto esp reqid 16385 mode transport

done

```

**PEER**

```

for i in `seq 1 8`
do
    local_ip=$i.0.0.2
    remote_ip=$i.0.0.1

    ip xfrm state add src $local_ip dst $remote_ip proto esp spi 0x54fa1f$i
    reqid 16385 mode transport aead "rfc4106(gcm(aes))"
    0x010203047aeaca3f87d060a12f4a4487d5a5c335 96 sel src 0.0.0.0/0 dst
    0.0.0.0/0 replay-window 64 flag esn

```

```

ip xfrm state add src $remote_ip dst $local_ip proto esp spi 0x53fa1f$i
reqid 16386 mode transport aead "rfc4106(gcm(aes))"
0x010203047aeaca3f87d060a12f4a4487d5a5c335 96 sel src 0.0.0.0/0 dst
0.0.0.0/0 replay-window 64 flag esn
ip xfrm policy add src $local_ip dst $remote_ip dir out tmpl src $local_ip
dst $remote_ip proto esp reqid 16385 mode transport
ip xfrm policy add src $local_ip dst $remote_ip dir fwd tmpl src $local_ip
dst $remote_ip proto esp reqid 16386 mode transport
ip xfrm policy add src $local_ip dst $remote_ip dir in tmpl src $local_ip
dst $remote_ip proto esp reqid 16386 mode transport

done

```

**4. The ip xfrm policies can be verified.**

```
[root@host~]# ip xfrm state list
```

5. Traffic can be run on the tunnels.

### 5.4.3. Co-processor counters

To verify whether Chelsio Co-processor is used by the applications, run the following command:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<PF4_id>/crypto
Chelsio Crypto Co-processor Stats
Cipher_ops: 64750285
Digest_ops: 13241
Aead_ops: 0
Completion: 64763501
Error: 0
Fallback: 0
IPSec Tx Inline: 0
```

## 5.5. Performance Tuning

---

Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.

### Inline-TLS

1. Run the performance tuning script to update few kernel parameters using sysctl and map TOE queues to different CPUs.

```
[root@host~]# t4_perftune.sh -n -Q ofld -s
```

2. Ensure that the application sends 8k PDU for best performance.

### Co-processor

1. Run the performance tuning script to update few kernel parameters using sysctl and map crypto queues to different CPUs.

```
[root@host~]# t4_perftune.sh -n -Q crypto -s
```

## 6. Software/Driver Unloading

To unload the Crypto Offload driver in Co-processor mode, run the following command:

```
[root@host~]# rmmmod chcr
```

To unload Crypto Offload driver in Inline mode, unload the network driver in TOE mode. Refer to the [Software/Driver Unloading](#) section in **Network (NIC/TOE)** chapter for more information.

## XXI. Inline IPsec Offload


---

# 1. Introduction

Inline IPsec Offload is a hardware acceleration feature that enables secure, high-speed data transmission by performing IPsec encryption and decryption directly on the network adapter, rather than in the host CPU. By offloading cryptographic processing, packet classification, and encapsulation tasks to the adapter, Inline IPsec Offload significantly reduces CPU utilization, minimizes latency, and enhances overall throughput. This approach ensures end-to-end data confidentiality and integrity while maintaining line-rate performance, making it ideal for secure communication in data centers, cloud infrastructures, and enterprise networks.

The following applications can be used to configure IPsec tunnels:

- ip xfrm
- strongSwan

 **Note** *This is supported only on T7 family of adapters.*

## 1.1. Hardware Requirements

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the Network driver is available only for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.


## 2. Kernel Configuration

### 2.1. Kernel Configuration

#### 2.1.1. Kernel.org linux-6.18.X/6.12.X

If the IPsec components are not enabled, enable them as follows:

```
CONFIG_XFRM=y
CONFIG_XFRM_OFFLOAD=y
CONFIG_INET_ESP=y
CONFIG_INET_ESP_OFFLOAD=m
CONFIG_INET6_ESP=m
CONFIG_INET6_ESP_OFFLOAD=m
CONFIG_INET6_ESPINTCP=y
CONFIG_CRYPTOD=y
CONFIG_CRYPTOD_AEAD=y
CONFIG_CRYPTOD_GCM=m
```

 Note

- *DUT is the machine equipped with a T7 card.*
- *PEER is the corresponding companion machine.*
- *The PEER must run without hw offload support.*

#### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

## 3. Software/Driver Loading

Perform the following steps to load the driver:

1. Load the Inline IPsec crypto offload driver.  
To run IPsec Offload in NIC Mode (without tcp offload support):

```
[root@host~]# modprobe cxgb4  
[root@DUT~]# modprobe ch_ipsec
```

2. Bring up the Chelsio interface(s).

```
[root@DUT~]# ifconfig ethX <IP> up
```

Where *ethX* refers to the interface of T7 adapter.

## 4. Configuration

### 4.1. Using ip xfrm

1. Establish IPsec SAs and Policies using the commands below.
  - a. On DUT


```
[root@DUT~]# ip xfrm state add src $DUT_IP dst $PEER_IP proto esp spi
spi 0x0a1b2c3d reqid 0x5f7c1a6b mode transport aead
"rfc4106(gcm(aes))" 0x0f83e4cb43bd443a839bef61378d294577386f72 128
sel src 0.0.0.0/0 dst 0.0.0.0/0 offload dev ethX dir out replay-
window 128 flag esn

[root@DUT~] ip xfrm state add src $PEER_IP dst $DUT_IP proto esp spi
0x4e5f6a7b reqid 0x9abcdef0 mode transport aead "rfc4106(gcm(aes))"
0x0f83e4cb43bd443a839bef61378d294577386f72 128 sel src 0.0.0.0/0 dst
0.0.0.0/0 offload dev ethX dir in replay-window 128 flag esn

[root@DUT~] ip xfrm policy add src $DUT_IP dst $PEER_IP dir out tmpl
src $DUT_IP dst $PEER_IP proto esp reqid 0x5f7c1a6b mode transport

[root@DUT~] ip xfrm policy add src $PEER_IP dst $DUT_IP dir fwd tmpl
src $PEER_IP dst $DUT_IP proto esp reqid 0x9abcdef0 mode transport

[root@DUT~] ip xfrm policy add src $PEER_IP dst $DUT_IP dir in tmpl
src $PEER_IP dst $DUT_IP proto esp reqid 0x9abcdef0 mode transport
```

 **Note** *ethX refers to the interface of DUT adapters.*

- b. On PEER

```
[root@PEER~] ip xfrm state add src $DUT_IP dst $PEER_IP proto esp
spi 0x0a1b2c3d reqid 0x5f7c1a6b mode transport aead
'rfc4106(gcm(aes))' 0x0f83e4cb43bd443a839bef61378d294577386f72 128
sel src 0.0.0.0/0 dst 0.0.0.0/0 replay-window 128 flag esn

[root@PEER~] ip xfrm state add src $PEER_IP dst $DUT_IP proto esp
spi 0x4e5f6a7b reqid 0x9abcdef0 mode transport aead
'rfc4106(gcm(aes))' 0x0f83e4cb43bd443a839bef61378d294577386f72 128
sel src 0.0.0.0/0 dst 0.0.0.0/0 replay-window 128 flag esn"

[root@PEER~] ip xfrm policy add src $PEER_IP dst $DUT_IP dir out
tmpl src $PEER_IP dst $DUT_IP proto esp reqid 0x9abcdef0 mode
transport

[root@PEER~] ip xfrm policy add src $DUT_IP dst $PEER_IP dir fwd
tmpl src $DUT_IP dst $PEER_IP proto esp reqid 0x5f7c1a6b mode
transport
```

```
[root@PEER~]# ip xfrm policy add src $DUT_IP dst $PEER_IP dir in
tmpl src $DUT_IP dst $PEER_IP proto esp reqid 0x5f7c1a6b mode
transport
```

2. Verify SA and policy status:

```
[root@DUT~]# ip xfrm state list
```


### 4.1.1. Using StrongSwan

1. Deploy certificates to DUT and PEER.

```
/usr/local/etc/swanctl/private/ # Private Keys of respective hosts
/usr/local/etc/swanctl/x509/    # Host Certificates of respective hosts
usr/local/etc/swanctl/x509ca/  # CA Certificate
```

2. Configure `/usr/local/etc/strongswan.conf` (enable `make_before_break = yes`).

```
[root@DUT~]# cat /usr/local/etc/strongswan.conf
charon {
    load_modular = yes
    plugins {
        include strongswan.d/charon/*.conf
        make_before_break = yes          # <----- Append
"make_before_break" parameter
    }
}
```

 **Note** *"make\_before\_break" ensures seamless tunnel rekeying by creating a new SA before tearing down the old one, preventing traffic disruption.*

3. Update `/usr/local/etc/swanctl/swanctl.conf` on both the DUT and PEER according to their IP configurations.

a. DUT Machine

**Note** Ensure “hw\_offload = yes” on DUT.

```
[root@DUT~]# cat /usr/local/etc/swanctl/swanctl.conf
connections {
  gw-port0 {
    local_addrs = <DUT_IP>
    remote_addrs = <PEER_IP>

    local {
      auth = pubkey
      certs = dut-Cert.der
      id = C=CH, O=test.ipsec.tunnel, CN=dut-common-name
    }

    remote {
      auth = pubkey
      id = C=CH, O=test.ipsec.tunnel, CN=peer-common-name
    }

    children {
      net-net-0 {
        rekey_time = 4000000
        esp_proposals = aes128gcm128-esn-noesn
        hw_offload = yes
        mode = tunnel
      }
    }

    version = 2
    mobike = no
    rekey_time = 8500000
    reauth_time = 9000000
    proposals = aes256-sha1-x25519
  }
}
```

## b. PEER Machine

**Note** Ensure `hw_offload = no` on PEER.

```
[root@PEER~]# cat /usr/local/etc/swanctl/swanctl.conf
connections {
    gw-port0 {
        local_addrs = <PEER_IP>
        remote_addrs = <DUT_IP>

        local {
            auth = pubkey
            certs = peer-Cert.der
            id = C=CH, O=test.ipsec.tunnel, CN=peer-common-name
        }

        remote {
            auth = pubkey
            id = C=CH, O=test.ipsec.tunnel, CN=dut-common-name
        }

        children {
            net-net-0 {
                rekey_time = 5000000
                esp_proposals = aes128gcm128-esn-noesn
                hw_offload = no
                mode = tunnel
            }
        }

        version = 2
        mobike = no
        rekey_time = 11000000
        reauth_time = 12000000
        proposals = aes256-sha1-x25519
    }
}
```

4. Start and load configurations on both DUT and PEER Machines.

```
[root@DUT~]# /usr/local/libexec/ipsec/charon
[root@DUT~]# swanctl --load-creds
[root@DUT~]# swanctl --load-conns
```

5. Initiate connection from DUT.

```
[root@DUT~]# swanctl -i -c net-net-0
```

6. Verify connection.

```
[root@DUT~]# swanctl --list-sas -P
```

## 5. Software/Driver Unloading

To unload the driver, execute the following commands:

```
[root@DUT~]# rmmod ch_ipsec
```

## XXII. iSER

---

---

# 1. Introduction

The iSCSI Extensions for RDMA (iSER) protocol is a translation layer for operating iSCSI over RDMA transports, such as iWARP/Ethernet or InfiniBand.

## 1.1. Hardware Requirements

### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the iSER driver is available for the following kernel versions:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

---

## 2. Kernel Configuration

### Kernel.org linux-6.18.X/6.12.X

1. Ensure that the following iSER components are enabled in the kernel configuration file:

```
CONFIG_ISCSI_TARGET
CONFIG_INFINIBAND_ISER
CONFIG_INFINIBAND_ISERT
```

2. If the iSER components are not enabled, enable them as follows:

```
CONFIG_ISCSI_TARGET=m
CONFIG_INFINIBAND_ISER=m
CONFIG_INFINIBAND_ISERT=m
```

3. Compile and install the kernel, then boot into the new kernel and install the Chelsio Unified Wire.

### RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4

No additional kernel configuration is required.

## 3. Software/Driver Installation

### 3.1. Pre-requisites

Ensure that the following requirements are met before driver installation:

- Uninstall any OFED present in the machine.
- The `rdma-core-devel` package should be installed on RHEL/Rocky/AlmaLinux 10.X/9.7/9.6, Ubuntu 24.04.4 systems.
- `targetcli` will be automatically installed by the Chelsio Unified Wire installer using the package manager `yum/apt/zypper`, if missing from the system. If you plan to use a different version, it is highly recommended to install **v2.1.fb29 or later**.

### 3.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install Chelsio iSER driver, libraries, and targetcli utilities.

```
[root@host~]# make iser_install
```

**i** Note *For more installation options, run `make help` or `install.py -h`.*

3. Reboot your machine to apply the changes.

```
[root@host~]# reboot
```

## 4. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

Follow the steps mentioned below on both target and initiator machines:

1. Unload the Chelsio iWARP driver if previously loaded.

```
[root@host~]# rmmod iw_cxgb4
```

2. Load the following modules.

```
[root@host~]# modprobe iw_cxgb4  
[root@host~]# modprobe rdma_ucm
```

3. Start the iWARP Port Mapper Daemon.

```
[root@host~]# iwpmc
```

4. Bring up the Chelsio interface(s).

```
[root@host~]# ifconfig ethX x.x.x.x up
```

5. On target, run the following command:

```
[root@host~]# modprobe ib_isert
```

On initiator, run the following command:

```
[root@host~]# modprobe ib_iser
```

## 5. Software/Driver Configuration and Fine-tuning

1. Configure LIO target with iSER support, using ramdisk as LUN.

```
[root@host~]# targetcli /backstores/ramdisk create name=ram0 size=1GB
[root@host~]# targetcli /iscsi create wwn=iqn.2003-01.org.lun0.target
[root@host~]# targetcli /iscsi/iqn.2003-01.org.lun0.target/tpg1/luns create
/backstores/ramdisk/ram0
[root@host~]# targetcli /iscsi/iqn.2003-01.org.lun0.target/tpg1 set
attribute authentication=0 demo_mode_write_protect=0 generate_node_acls=1
cache_dynamic_acls=1
[root@host~]# targetcli saveconfig
```

2. Discover LIO target using the OpeniSCSI initiator.

```
[root@host~]# iscsiadm -m discovery -t st -p 102.10.10.4
```

3. Enable iSER support in the LIO target.

```
[root@host~]# targetcli /iscsi/iqn.2003-01.org.lun0.target/tpg1/portals/0.0.0.0:3260 enable_iser boolean=True
```

4. Login from the initiator with iSER as transport.

```
[root@host~]# iscsiadm -m node -p 102.10.10.4 -T iqn.2003-01.org.lun0.target
--op update -n node.transport_name -v iser
[root@host~]# iscsiadm -m node -p 102.10.10.4 -T iqn.2003-01.org.lun0.target
--login
```

## 5.1. HMA

To use HMA, ensure that Unified Wire is installed using the *Unified Wire (Default)* configuration tuning option. Currently, 256 IPv4/128 IPv6 iSER Initiator Offload connections are supported on T6 25G SO adapters. The following image shows the HMA reserved memory:

```
[root@localhost ~]# cat /sys/kernel/debug/cxgb4/0000\:05\:00.4/meminfo
EDC0:      0x0-0x3fffff [4.00 MiB]
EDC1:      0x400000-0x7fffff [4.00 MiB]
HMA:       0x800000-0x63ffff [92.0 MiB]
```

The following image shows the number of iSER offloaded connections:

```
[root@localhost ~]# cat /sys/kernel/debug/cxgb4/0000\:02\:00.4/tids
Connections in use: 256
TID range: 64..319, in use: 256
STID range: 320..383, in use-IPv4/IPv6: 0/0
ATID range: 0..127, in use: 0
FTID range: 384..879
HPFTID range: 0..63
HW TID usage: 256 IP users, 0 IPv6 users
```

## 5.2. Performance Tuning

1. Apply the performance settings mentioned in the [Performance Tuning](#) section in the **Unified Wire** chapter before proceeding.
2. Run the performance tuning script to update a few kernel parameters using `sysctl` and map iWARP queues to different CPUs.

```
[root@host~]# t4_perftune.sh -Q rdma -n -s
```

---

## 6. Software/Driver Unloading

To unload iSER driver:

On target, run the following commands:

```
[root@host~]# rmmod ib_isert  
[root@host~]# rmmod iw_cxgb4
```

On initiator, run the following commands:

```
[root@host~]# rmmod ib_iser  
[root@host~]# rmmod iw_cxgb4
```

## XXIII. WD-UDP

---

# 1. Introduction

Chelsio WD-UDP (Wire Direct-User Datagram Protocol) with Multicast is a user-space UDP stack with Multicast address reception and socket acceleration that enables users to run their existing UDP socket applications unmodified.

It features software modules that enable direct wire access from user space to the Chelsio network adapter with a complete bypass of the kernel, which results in an ultra-low latency Ethernet solution for high-frequency trading and other delay-sensitive applications.

## 1.1. Hardware Requirements

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

### 1.2.1. Linux Requirements

Currently, the WD-UDP driver is available for the following kernel versions:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

---

## 2. Software/Driver Installation

### 2.1. Pre-requisites

Ensure that the following requirements are met before driver installation:

- Uninstall any OFED present in the machine.
- The *rdma-core-devel* package should be installed on RHEL/Rocky/AlmaLinux 10.X/9.7.9.6 and Ubuntu 24.04.X systems.
- IOMMU should be disabled by adding *intel\_iommu/amd\_iommu=off* to the grub/grub2 kernel command line.


### 2.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install iWARP driver and WD-UDP libraries.

```
[root@host~]# make iwarp_install
```

 **Note** For more installation options, run `make help` or `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

---

## 3. Software/Driver Loading

**Important**

*Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers:*

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

The driver must be loaded by the root user. Any attempt to load the driver as a regular user may fail.

To load the drivers, use the following commands:

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe iw_cxgb4  
[root@host~]# modprobe rdma_ucm
```

---

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Accelerating UDP Socket Communications

The *libcxgb4\_sock* library is a LD\_PRELOAD-able library that accelerates UDP Socket communications transparently and without recompilation of the user application. This section describes how to use *libcxgb4\_sock*.

By preloading *libcxgb4\_sock*, all sockets created by the application are intercepted and possibly accelerated based on the user's configuration. Once accelerated, data for the UDP endpoint are transmitted or received via HW queues allocated specifically for the accelerated endpoint, bypassing the kernel, the host networking stack and sockets framework, and enabling ultra-low latency and high bandwidth utilization.

Due to HW resource limitations, only a small number of queues can be allocated for UDP acceleration. Therefore, only performance critical UDP applications should use *libcxgb4\_sock*.

**Only 64 IPv4 UDP / 28 IPv6 UDP sockets can be accelerated per Chelsio device, with *Unified Wire Configuration* tuning option. If you want more sockets to be accelerated, use *Low Latency* or *High Capacity WD* tuning option.**

#### 4.1.1. Application Requirements

Certain application behavior is not supported by *libcxgb4\_sock* in this release. If your application does any of the following, it will not work with *libcxgb4\_sock*:

- Calling *fork()* after creating UDP sockets and using the UDP socket in the child process.
- Using multiple threads on a single UDP socket without serialization. For instance, having one thread sending concurrently with another thread receiving. If your application does this, you need to serialize these paths with a spin or mutex lock.
- Only 1 UDP endpoint is allowed to bind to a given port per host. So, if you have multiple processes on the same host binding to the same UDP port number, you cannot use *libcxgb4\_sock*.
- Applications must have root privileges to use *libcxgb4\_sock*.
- Applications requiring bonded adapter interfaces are not currently supported.

The performance benefit observed with *libcxgb4\_sock* will vary based on your application's behavior. While all UDP I/O is handled properly, only certain datagrams are accelerated. Non-accelerated I/O is handled by *libcxgb4\_sock* via the host networking stack seamlessly. Both Unicast and Multicast datagrams can be accelerated, but the datagrams must meet the following criteria:

- Non-fragmented. In other words, they fit in a single IP datagram that is  $\leq$  the adapter device MTU.

- Routed through the Terminator acceleration device. If the ingress datagram arrives via a device other than the Terminator acceleration device, then it will not utilize the acceleration path. On egress, if the destination IP address will not route out via the Terminator device, then it too will not be accelerated.

#### 4.1.2. Using *libcxgb4\_sock*

The *libcxgb4\_sock* library utilizes the Linux RDMA Verbs subsystem, and thus requires the RDMA modules to be loaded. Ensure that your systems load the *iw\_cxgb4* and *rdma\_ucm* modules.

```
[root@host~]# modprobe iw_cxgb4
[root@host~]# modprobe rdma_ucm
```

Now, preload *libcxgb4\_sock*, using one of the methods mentioned below when starting your application:

- **Preloading using *wdload* script**

```
[root@host~]# PROT=UDP wdload <pathto>/your_application
```

The above command generates an end point file, *libcxgb4\_sock.conf* at */etc/*. Parameters like interface name and port number can be changed in this file.

The following example shows how to run Netperf with WD-UDP:

##### Server

```
[root@host~]# PROT=UDP wdload netserver -f -p <port_num> -D -L <server_ip>
```

##### Client

```
[root@host~]# PROT=UDP wdload netperf -H <server_ip> -p <port_num> -t UDP_RR
```

- **Preloading manually**

Create a configuration file that defines which UDP endpoints should be accelerated, their vlan and priority if any, as well as which Terminator interface/port should be used. The file */etc/libcxgb4\_sock.conf* contains these endpoint entries. Create this file on all systems using *libcxgb4\_sock*. Here is the syntax:

```
#
# Syntax:
#
# endpoint {attributes} ...
# where attributes include:
#         interface = interface-name
#         port = udp-port-number
#         vlan = vlan-id
#         priority = vlan-priority
#
# e.g.
# endpoint {
#         interface=eth2.5
#         port = 8000 vlan = 5 priority=1
# }
# endpoint {interface=eth2 port=9999}
#
# endpoints that bind to port 0 (requesting the host allocate a port)
# can be accelerated with port=0:
#
# endpoint {interface=eth1 port=0}
```

Assume your Terminator interface is eth2. To accelerate all applications that preload `libcxb4_sock` using eth2, you only need one entry in `/etc/libcxb4_sock.conf`.

```
endpoint {interface=eth2 port=0}
```

For VLAN support, create your VLANs using the normal OS service (like `vconfig`, for example), then add entries to define the VLAN and priority for each endpoint to be accelerated.

```
endpoint {interface = eth2.5 port=10000}
endpoint {interface = eth2.7 priority=3 port=9000}
```

Now, preload `libcxb4_sock`.

```
[root@host~]# CXGB4_SOCKET_CFG=<path to config file>
LD_PRELOAD=libcxb4_sock.so <pathto>/your_application
```

**Note** *To offload IPv6 UDP sockets, select **low latency networking** as the configuration tuning option during installation.*

- **Multiple interfaces**

To run on multiple interfaces, it is recommended to create a configuration file for each interface with the corresponding ports to offload. The applications can be started as below:

```
[root@host~]# CXGB4_SOCKET_CFG=<config_file1> PROT=UDP wdload <application>
[root@host~]# CXGB4_SOCKET_CFG=<config_file2> PROT=UDP wdload <application>
```

### 4.1.3. Running WD-UDP in debug mode

To use *libcxb4\_sock*'s debug capabilities, use the *libcxb4\_sock\_debug* library provided in the package. Follow the steps mentioned below:

1. Make the following entry in the */etc/syslog.conf* file:

```
*.debug /var/log/cxgb4.log
```

2. Restart the service.

```
[root@host~]# /etc/init.d/syslog restart
```

3. Finally, preload *libcxb4\_sock\_debug* using the command mentioned below when starting your application:

```
[root@host~]# LD_PRELOAD=libcxb4_sock_debug.so CXGB4_SOCKET_DEBUG=-1  
<pathto>/your_application
```

### 4.1.4. Running WD-UDP with larger I/O size

If the I/O size is more than 3988, execute the commands mentioned below:

```
[root@host~]# echo 1024 > /proc/sys/vm/nr_hugepages  
[root@host~]# CXGB4_SOCKET_HUGE_PAGES=1 PROT=UDP wdload  
<pathto>/your_application
```

### 4.1.5. Example with hpcbench/udp

The udp benchmark from the hpcbench suite can be used to show the benefits of *libcxb4\_sock*. The hpcbench suite can be found at:

Source: <http://hpcbench.sourceforge.net/index.html>

Sample: <http://hpcbench.sourceforge.net/udp.html>

The nodes in this example, r9 and r10, have Terminator eth1 configured and the ports are connected point-to-point.

```
[root@r9 ~]# ifconfig eth1|grep inet
    inet addr:192.168.2.111  Bcast:192.168.2.255  Mask:255.255.255.0
    inet6 addr: fe80::7:4300:104:465a/64 Scope:Link

[root@r10 ~]# ifconfig eth1|grep inet
    inet addr:192.168.2.112  Bcast:192.168.2.255  Mask:255.255.255.0
    inet6 addr: fe80::7:4300:104:456a/64 Scope:Link
```

For this benchmark, we need a simple **accelerate all** configuration on both nodes.

```
[root@r9 ~]# cat /etc/libcxgb4_sock.conf
endpoint {interface=eth1 port=0}

[root@r10 ~]# cat /etc/libcxgb4_sock.conf
endpoint {interface=eth1 port=0}
```

On R10, we run `udpsvr` on port 9000 without `libcxgb4_sock` preloaded, and on port 90001 with preload.

```
[root@r10 ~]# /usr/local/src/hpcbench/udp/udpsvr -p 9000 &
[1] 11453
[root@r10 ~]# TCP socket listening on port [9000]

[root@r10 ~]# LD_PRELOAD=libcxgb4_sock.so
/usr/local/src/hpcbench/udp/udpsvr -p 9001 &
[2] 11454
[root@r10 ~]# TCP socket listening on port [9001]
```

Then on r9, we run `udptest` to port 9000 to see the host stack UDP latency.

```
[root@r9 ~]# /usr/local/src/hpcbench/udp/udptest -r 5 -a -h 192.168.1.112 -p 9000
```

Running the same test with `libcxgb4_sock`.

```
[root@r9 ~]# LD_PRELOAD=libcxgb4_sock.so /usr/local/src/hpcbench/udp/udptest
-r 5 -a -h 192.168.1.112 -p 9001
```

#### 4.1.6. Determining if the application is being offloaded

To see if the application is being offloaded, open a window on one of the machines, and run `tcpdump` against the Chelsio interface. If you see minimal UDP output on the interface, then the UDP traffic is being properly offloaded.

## 5. Software/Driver Unloading

To unload the WD-UDP driver, run the following command:

```
[root@host~]# rmmod iw_cxgb4
```


## XXIV. Data Center Bridging (DCB)

---

## 1. Introduction

**Data Center Bridging (DCB)** refers to a set of bridge specification standards, aimed to create a converged Ethernet network infrastructure shared by all storage, data networking and traffic management services. An improvement to the existing specification, DCB uses priority-based flow control to provide hardware-based bandwidth allocation and enhances transport reliability.

One of DCB's many benefits includes low operational cost, due to consolidated storage, server, and networking resources, reduced heat and noise, and less power consumption. Administration is simplified since the specifications enable transport of storage and networking traffic over a single unified Ethernet network.

 **Note** *This is supported only on T6/T5 family of adapters.*

### 1.1. Hardware Requirements

---

#### 1.1.1. Supported adapters

The following are the supported Chelsio adapters:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the DCB feature is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Software/Driver Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Build and install all drivers with DCB support.

```
[root@host~]# make dcbx=1 install
```

 **Note** *For more installation options, run* `make help`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 3. Software/Driver Loading



**Important** Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers:

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4
libcxgbi libcxgb
```

Before proceeding, ensure that Unified Wire is installed with DCB support as mentioned in previous section. The switch ports need to be enabled with DCBX configuration (Class mapping, ETS and PFC).

Upon loading the network/storage driver and interface bringup, firmware completes DCBX negotiation with the switch.

```
[root@host~]# modprobe cxgb4
[root@host~]# modprobe t4_tom
[root@host~]# ifconfig ethX up
[root@host~]# modprobe csiostor
```

The negotiated DCBX parameters can be reviewed at `/sys/kernel/debug/cxgb4/<PF4_id>/dcb_info`

*Example:*

```
[root@kissel ~]# cat /sys/kernel/debug/cxgb4/0000\:04\:00.4/dcb_info
Data Center Bridging Information

Port: 0 (DCB negotiated: yes)
[ DCBx Version DCBx-CEE 1.01 ]

  Index      :      0  1  2  3  4  5  6  7
Priority Group IDs      :      6  6  0  6  6  6  1  6
Priority Group BW(%)    :      60 40  0  0  0  0  0  0
Max PG Traffic Classes [ 8 ]

Priority Flow Control   :      0  0  1  0  0  0  1  0
Max PFC Traffic Classes [ 8 ]

Application Information:
App  Priority  Selection  Protocol
Index Map      Field      ID
  0  0x40     Socket TCP (1)  0x0cbc (3260)
  1  0x04     Socket TCP (1)  0xc350 (50000)

Port: 1 (DCB negotiated: no)
```

The storage driver (FCoE Full Offload Initiator) uses the DCBX negotiated parameters (ETS, PFC etc.) without any further configuration. The network drivers (`cxgb4`, `t4_tom`) and iSCSI drivers (`cxgb4i`, `chiscsi`) need further VLAN configuration to be setup, which is explained in the [Running NIC & iSCSI Traffic together with DCBx](#) section.

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Configuring Cisco Nexus 5010 switch

#### 4.1.1. Configuring the DCB parameters

**Note** *By default, the Cisco Nexus switch enables DCB functionality and configures PFC for FCoE traffic making it no drop with bandwidth of 50% assigned to FCoE class of traffic and another 50% for the rest (like NIC). If you wish to configure custom bandwidth, then follow the procedure below.*

In this procedure, you may need to adjust some of the parameters to suit your environment, such as VLAN IDs, Ethernet interfaces, and virtual Fibre Channel interfaces.

To enable PFC, ETS, and DCB functions on a Cisco Nexus 5010 series switch:

1. Open a terminal configuration setting.

```
switch# config terminal
switch(config)#
```

2. Configure qos class-maps and set the traffic priorities: NIC uses priority 0 and FcoE uses priority 3.

```
switch(config)#class-map type qos class-nic
switch(config-cmap-qos)# match cos 0
switch(config-cmap-qos)# class-map type qos class-fcoe
switch(config-cmap-qos)# match cos 3
```

3. Configure queuing class-maps.

```
switch(config)#class-map type queuing class-nic
switch(config-cmap-que)#match qos-group 2
```

4. Configure network-qos class-maps.

```
switch(config)#class-map type network-qos class-nic
switch(config-cmap-nq)#match qos-group 2
```

5. Configure qos policy-maps.

```
switch(config)#policy-map type qos policy-test
switch(config-pmap-qos)#class type qos class-nic
switch(config-pmap-c-qos)#set qos-group 2
```

6. Configure queuing policy-maps and assign network bandwidth. Divide the network bandwidth between FcoE and NIC traffic.

```
switch(config)#policy-map type queuing policy-test
switch(config-pmap-que)#class type queuing class-nic
switch(config-pmap-c-que)#bandwidth percent 50
switch(config-pmap-c-que)#class type queuing class-fcoe
switch(config-pmap-c-que)#bandwidth percent 50
switch(config-pmap-c-que)#class type queuing class-default
switch(config-pmap-c-que)#bandwidth percent 0
```

7. Configure network-qos policy maps and set up the PFC for no-drop traffic class.

```
switch(config)#policy-map type network-qos policy-test
switch (config-pmap-nq)#class type network-qos class-nic
switch(config-pmap-nq-c)#pause no-drop
```

**Note** *By default, FCoE is set to pause no drop. In such a trade off, one may want to set NIC to drop instead.*

8. Apply the new policy (PFC on NIC and FcoE traffic) to the entire system.

```
switch(config)#system qos
switch(config-sys-qos)#service-policy type qos input policy-test
switch(config-sys-qos)#service-policy type queuing output policy-test
switch(config-sys-qos)#service-policy type queuing input policy-test
switch(config-sys-qos)#service-policy type network-qos policy-test
```

### 4.1.2. Configuring the FCoE/FC Ports

In this procedure, you may need to adjust some of the parameters to suit your environment, such as VLAN IDs, Ethernet interfaces, and virtual Fibre Channel interfaces.

1. The following steps enable FCoE services on a particular VLAN and does a VSAN-VLAN mapping. Need not do these steps every time, unless a new mapping has to be created.

```
switch(config)# vlan 2
switch(config-vlan)# fcoe vsan 2
switch(config-vlan)#exit
```

2. The following steps help in creating a virtual fibre channel (VFC) and binds that VFC to an Ethernet interface so that the Ethernet port begins functioning as a FCoE port.

```
switch(config)# interface vfc 13
switch(config-if)# bind interface ethernet 1/13
switch(config-if)# no shutdown
switch(config-if)# exit
switch(config)#vsan database
switch(config-vsan-db)# vsan 2
switch(config-vsan-db)# vsan 2 interface vfc 13
switch(config-vsan-db)# exit
```

**Note** *If you are binding the VFC to a MAC address instead of an ethernet port, then ensure the ethernet port is part of both default VLAN and FCoE VLAN.*

3. Assign VLAN ID to the Ethernet port on which FCoE service was enabled in step1.

```
switch(config)# interface ethernet 1/13
switch(config-if)# switchport mode trunk
switch(config-if)# switchport trunk allowed vlan 2
switch(config-if)# no shutdown
switch(config)#exit
```

4. Enabling DCB.

```
switch(config)# interface ethernet 1/13
switch(config-if)# priority-flow-control mode auto
switch(config-if)# flowcontrol send off
switch(config-if)# flowcontrol receive off
switch(config-if)# lldp transmit
switch(config-if)# lldp receive
switch(config-if)# no shutdown
```

5. On the FC Ports, if a FC target is connected then perform the following steps:

```
switch(config)#vsan database
switch(config-vsan-db)#vsan 2
switch(config-vsan-db)# vsan 2 interface fc 2/2
switch(config-vsan-db)#exit
switch(config)interface fc 2/2
switch(config-if)# switchport mode auto
switch(config-if)# switchport speed auto
switch(config-if)# no shutdown.
```

6. If you have not created a zone, then ensure the default-zone permits the VSAN created, otherwise the initiator and the target on that particular VSAN although FLOGI'd into the switch will not talk to each other. To enable it, execute the below command:

```
switch(config)# zone default-zone permit vsan 2
```

## 4.2. Configuring the Brocade 8000 switch

---

1. Configure LLDP for FCoE. Example of configuring LLDP for 10-Gigabit Ethernet interface.

```
switch(config)#protocol lldp
switch(conf-lldp)#advertise dcbx-fcoe-app-tlv
switch(conf-lldp)#advertise dcbx-fcoe-logical-link-tlv
```

2. Create a CEE Map to carry LAN and SAN traffic if it does not exist. Example of creating a CEE map.

```
switch(config)# cee-map default
switch(conf-cee-map)#priority-group-table 1 weight 40 pfc
switch(conf-cee-map)#priority-group-table 2 weight 60
switch(conf-cee-map)#priority-table 2 2 2 1 2 2 2 2
```

3. Configure the CEE interface as a Layer 2 switch port. Example of configuring the switch port as a 10-Gigabit Ethernet interface.

```
switch(config)#interface tengigabitethernet 0/16
switch(config-if-te-0/16)#switchport
switch(config-if-te-0/16)#no shutdown
switch(config-if)#exit
```

4. Create an FCoE VLAN and add an interface to it. Example of creating a FCoE VLAN and adding a single interface.

```
switch(config)#vlan classifier rule 1 proto fcoe encap ethv2
switch(config)#vlan classifier rule 2 proto fip encap ethv2
switch(config)#vlan classifier group 1 add rule 1
switch(config)#vlan classifier group 1 add rule 2
switch(config)#interface vlan 1002
switch(conf-if-vl-1002 )#fcf forward
switch(conf-if-vl-1002 )#interface tengigabitethernet 0/16
switch(config-if-te-0/16)#switchport
switch(config-if-te-0/16)#switchport mode converged
switch(config-if-te-0/16)#switchport converged allowed vlan add 1002
switch(config-if-te-0/16)#vlan classifier activate group 1 vlan 1002
switch(config-if-te-0/16)#cee default
switch(config-if-te-0/16)#no shutdown
switch(config-if-te-0/16)#exit
```




**Note** Unlike cisco, only one VLAN ID can carry FCoE traffic for now on Brocade 8000. It is their limitation.

5. Save the Configuration.

```
switch#copy running-config startup-config
```

## 5. Running NIC & iSCSI Traffic together with DCBx



**Note** Refer to the [iSCSI PDU Offload Initiator](#) chapter to configure iSCSI Initiator.

Use the following procedure to run NIC and iSCSI traffic together with DCBx enabled.

1. Identify the VLAN priority configured for NIC and iSCSI class of traffic on the switch.
2. Create VLAN interfaces for running NIC and iSCSI traffic and configure the corresponding VLAN priority.

### *Example:*

The Switch is configured with a VLAN priority of 2 and 5 for NIC and iSCSI class of traffic respectively. NIC traffic is run on VLAN10, and iSCSI traffic is run on VLAN20.


Assign proper VLAN priorities on the interface (here eth5), using the following commands on the host machine:

```
[root@host~]# vconfig set_egress_map eth5.10 0 2
[root@host~]# vconfig set_egress_map eth5.20 5 5
```

## XXV. FCoE Full Offload Initiator

# 1. Introduction

Fibre Channel over Ethernet (FCoE) is a mapping of Fibre Channel over selected full duplex IEEE 802.3 networks. The goal is to provide I/O consolidation over Ethernet, reducing network complexity in the Datacenter. Chelsio FCoE initiator maps Fibre Channel directly over Ethernet while being independent of the Ethernet forwarding scheme. The FCoE protocol specification replaces the FC0 and FC1 layers of the Fibre Channel stack with Ethernet. By retaining the native Fibre Channel constructs, FCoE integrates with the existing Fibre Channel networks and management software.

 **Note** *This is supported only on T6/T5 family of adapters.*

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the FCoE full offload Initiator driver is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Software/Driver Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install FCoE full offload initiator driver.

```
[root@host~]# make fcoe_full_offload_initiator_install
```

**Note** *For more installation options, run `make help` or `install.py -h`.*

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 3. Software/Driver Loading

**! Important**

*Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

The driver must be loaded by the root user. Any attempt to load the driver as a regular user will fail.

To load the driver, execute the following:

```
[root@host~]# modprobe csiostor
```

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Configuring Cisco Nexus 5010 and Brocade switch

To configure various Cisco and Brocade switch settings, refer to the [Software/Driver Configuration and Fine-tuning](#) section of **Data Center Bridging (DCB)** chapter.

### 4.2. FCoE fabric discovery verification

#### 4.2.1. Verifying Local Ports

Once connected to the switch, use the following command to see if the FIP has gone through and a VN\_Port MAC address has been assigned.

Verify if all the FCoE ports are online/ready and a successful FIP has taken place using the following command. The **wwpn** and **state** of the initiator local port can be found under sysfs.

```
[root@host~]# cat /sys/class/fc_host/hostX/port_name
```

```
[root@ ~]# cat /sys/class/fc_host/host0/port_name
0x500074304639f080
[root@ ~]# cat /sys/class/fc_host/host0/port_state
Online
```

**Note**

- *The hosts under fc\_host depends on the number of ports on the adapter used.*
- *Inorder to identify chelsio fc\_host from other vendor fc\_host, the WWPN always begins with **0x5000743***

Alternatively, the local port information can also be found using:

```
[root@host~]# cat /sys/kernel/debug/CSIStor/<pci_id>/lnodes
```

```
[root@ ~]# cat /sys/kernel/debug/csiostor/0000\81\00.6/lnodes
*****[Index: 0]*****
device id: 1613956
vnpi: 41092
fcfi: 41120
mac: 0efcfa340020
nport id: 340020
wwnn: 50007433cadb6000
wwpn: 50007433cadb6080
num rnodes: 4
npiv: SUPPORTED
common service params:
    hi ver:00
    low ver:00
    bb credit:10
    wordl(31:16) flags:8000
    rcv size:2068
    maxsq_reloff:16711711
    ratov:16711711
    edtov:2000
class service params:
class 1:NOT SUPPORTED
class 2:NOT SUPPORTED
class 3:SUPPORTED
initiator ctl:0
recipient ctl:0
rcv size:2068
Total concurrent seq:0
ee credit:0
open sequence per exch:0
class 4:NOT SUPPORTED
```

### 4.2.2. Verifying the target discovery

To view the list of targets discovered on a particular FCoE port, follow the below mentioned steps:

1. Determine the WWPN of the initiator local port under `sysfs`. The hosts under `fc_host` depends on the number of ports on the adapter used.

```
[root@host~]# cat /sys/class/fc_host/hostX/port_name
```

2. After finding the localport, go to the corresponding remote port under `sysfs` # `cat /sys/class/fc_remote_ports/rport-X:B:R` where X is the Host ID, B is the bus ID, and R is the remote port.

```
[root@ ~]# cat /sys/class/fc_remote_ports/rport-0\0-0/roles
Fabric Port
[root@ ~]# cat /sys/class/fc_remote_ports/rport-0\0-1/roles
Directory Server
[root@ ~]# cat /sys/class/fc_remote_ports/rport-0\0-2/roles
Management Server
[root@ ~]# cat /sys/class/fc_remote_ports/rport-0\0-3/roles
FCP Initiator
[root@ ~]# cat /sys/class/fc_remote_ports/rport-0\0-4/roles
FCP Initiator
[root@ ~]# cat /sys/class/fc_remote_ports/rport-0\0-9/roles
FCP Target
```

**Note** *R can correspond to NameServer, Management Server and other initiator ports logged in to the switch and targets.*

Alternatively, the local ports can also be found using:

```
[root@host~]# cat /sys/kernel/debug/csiostor/<pci_id>/lnodes
```

After finding out the WWPN of the local node, to verify the list of discovered targets, use the following command.

```
[root@host~]# cat /sys/kernel/debug/csiostor/<pci_id>/rnodes
```

```
[root@host~]# cat /sys/kernel/debug/csiostor/0000\81\00.6/rnodes
*****Index : 0*****
ssni: 40064
vnpi: 41092
fcofi: 41120
wwnn: 2058000decb1bd41
wwpn: 2003000decb1bd7f
nport id: fffffe
fcp flags: 0
role: fabric
class service params:
class 1:NOT SUPPORTED
class 2:NOT SUPPORTED
class 3:SUPPORTED
class 4:NOT SUPPORTED
*****Index : 1*****
ssni: 40065
vnpi: 41092
fcofi: 41120
wwnn: 2058000decb1bd41
wwpn: 250d000decb1bd40
nport id: fffffc
fcp flags: 0
role: nameserver
class service params:
class 1:NOT SUPPORTED
class 2:NOT SUPPORTED
class 3:SUPPORTED
class 4:NOT SUPPORTED
*****Index : 2*****
ssni: 40067
vnpi: 41092
fcofi: 41120
wwnn: 2058000decb1bd41
wwpn: 250b000decb1bd40
nport id: fffffa
fcp flags: 0
role: nport
class service params:
class 1:NOT SUPPORTED
class 2:NOT SUPPORTED
class 3:SUPPORTED
class 4:NOT SUPPORTED
*****Index : 3*****
ssni: 40068
vnpi: 41092
fcofi: 41120
wwnn: 500a0980892bb831
wwpn: 500a0981992bb831
nport id: 340000
fcp flags: 0
role: target
class service params:
class 1:NOT SUPPORTED
class 2:NOT SUPPORTED
class 3:SUPPORTED
class 4:NOT SUPPORTED
```

## 4.3. Formatting the LUNs and Mounting the Filesystem

Use `lsscsi -g` to list the LUNs discovered by the initiator.

```
[root@host~]# lsscsi -g
```

```
[root@ ~]# lsscsi -g
[0:0:0:0] disk NETAPP LUN 8010 /dev/sda /dev/sg0
[0:0:0:1] disk NETAPP LUN 8010 /dev/sdb /dev/sg1
[0:0:0:2] disk NETAPP LUN 8010 /dev/sdc /dev/sg2
[0:0:0:3] disk NETAPP LUN 8010 /dev/sdd /dev/sg3
[0:0:0:4] disk NETAPP LUN 8010 /dev/sde /dev/sg4
[0:0:0:5] disk NETAPP LUN 8010 /dev/sdf /dev/sg5
[0:0:0:6] disk NETAPP LUN 8010 /dev/sdg /dev/sg6
[0:0:0:7] disk NETAPP LUN 8010 /dev/sdh /dev/sg7
[0:0:0:8] disk NETAPP LUN 8010 /dev/sdi /dev/sg8
[0:0:0:9] disk NETAPP LUN 8010 /dev/sdj /dev/sg9
[0:0:0:10] disk NETAPP LUN 8010 /dev/sdk /dev/sg10
[0:0:0:11] disk NETAPP LUN 8010 /dev/sdl /dev/sg11
[0:0:0:12] disk NETAPP LUN 8010 /dev/sdm /dev/sg12
[0:0:0:13] disk NETAPP LUN 8010 /dev/sdn /dev/sg13
[0:0:0:14] disk NETAPP LUN 8010 /dev/sdo /dev/sg14
[0:0:0:15] disk NETAPP LUN 8010 /dev/sdp /dev/sg15
[0:0:0:16] disk NETAPP LUN 8010 /dev/sdq /dev/sg16
[0:0:0:17] disk NETAPP LUN 8010 /dev/sdr /dev/sg17
[0:0:0:18] disk NETAPP LUN 8010 /dev/sds /dev/sg18
[0:0:0:19] disk NETAPP LUN 8010 /dev/sdt /dev/sg19
[1:0:0:0] disk NETAPP LUN 8010 /dev/sdu /dev/sg20
[1:0:0:1] disk NETAPP LUN 8010 /dev/sdv /dev/sg21
[1:0:0:2] disk NETAPP LUN 8010 /dev/sdw /dev/sg22
[1:0:0:3] disk NETAPP LUN 8010 /dev/sdx /dev/sg23
[1:0:0:4] disk NETAPP LUN 8010 /dev/sdy /dev/sg24
[1:0:0:5] disk NETAPP LUN 8010 /dev/sdz /dev/sg25
[1:0:0:6] disk NETAPP LUN 8010 /dev/sdaa /dev/sg26
[1:0:0:7] disk NETAPP LUN 8010 /dev/sdab /dev/sg27
[1:0:0:9] disk NETAPP LUN 8010 /dev/sdac /dev/sg28
[1:0:0:10] disk NETAPP LUN 8010 /dev/sdad /dev/sg29
[1:0:0:11] disk NETAPP LUN 8010 /dev/sdae /dev/sg30
[1:0:0:12] disk NETAPP LUN 8010 /dev/sdaf /dev/sg31
[1:0:0:15] disk NETAPP LUN 8010 /dev/sdag /dev/sg32
[3:0:0:0] disk NETAPP LUN 8010 /dev/sdah /dev/sg33
[3:0:0:1] disk NETAPP LUN 8010 /dev/sdai /dev/sg34
[3:0:0:2] disk NETAPP LUN 8010 /dev/sdaj /dev/sg35
[3:0:0:3] disk NETAPP LUN 8010 /dev/sdak /dev/sg36
[3:0:0:4] disk NETAPP LUN 8010 /dev/sdal /dev/sg37
[3:0:0:5] disk NETAPP LUN 8010 /dev/sdam /dev/sg38
[3:0:0:6] disk NETAPP LUN 8010 /dev/sdan /dev/sg39
[3:0:0:7] disk NETAPP LUN 8010 /dev/sdao /dev/sg40
[3:0:0:8] disk NETAPP LUN 8010 /dev/sdap /dev/sg41
[3:0:0:9] disk NETAPP LUN 8010 /dev/sdaq /dev/sg42
[3:0:0:10] disk NETAPP LUN 8010 /dev/sdar /dev/sg43
[3:0:0:11] disk NETAPP LUN 8010 /dev/sdas /dev/sg44
[3:0:0:12] disk NETAPP LUN 8010 /dev/sdat /dev/sg45
[3:0:0:13] disk NETAPP LUN 8010 /dev/sdau /dev/sg46
[3:0:0:14] disk NETAPP LUN 8010 /dev/sdav /dev/sg47
[3:0:0:15] disk NETAPP LUN 8010 /dev/sdaw /dev/sg48
[3:0:0:16] disk NETAPP LUN 8010 /dev/sdax /dev/sg49
```

Alternatively, the LUNs discovered by the Chelsio FCoE initiators can be accessed through the easily-identifiable 'udev' path device files like:

```
[root@host~]# ls /dev/disk/by-path/pci-0000:04:00.0-csio-fcoe
<local_wwpn>:<remote_wwpn>:<lun_wwn>
```

```
[root@ ~]# mount /dev/disk/by-path/pci-0000:03:00.6-csio-fcoe-0x50007430463b7380:0x500a0981892bb831:0x0000000000000000 /mnt/
[root@ ~]# mount
/dev/sdbe5 on / type ext4 (rw)
proc on /proc type proc (rw)
sysfs on /sys type sysfs (rw)
devpts on /dev/pts type devpts (rw,gid=5,mode=620)
tmpfs on /dev/shm type tmpfs (rw)
/dev/sdbel on /boot type ext3 (rw)
none on /proc/sys/fs/binfmt_misc type binfmt_misc (rw)
/tmp on /tmp type none (rw,bind)
/var/tmp on /var/tmp type none (rw,bind)
/home on /home type none (rw,bind)
sunrpc on /var/lib/nfs/rpc_pipefs type rpc_pipefs (rw)
none on /sys/kernel/debug type debugfs (rw)
gvfs-fuse-daemon on /root/.gvfs type fuse.gvfs-fuse-daemon (rw,nosuid,nodev)
/dev/sdah on /mnt type ext3 (rw)
```

## 4.4. Creating Filesystem

Create an ext3 filesystem using the following command:

```
[root@host~]# mkfs.ext3 /dev/sdx
```

```
[root@ ~]# mkfs.ext3 /dev/sdah
mke2fs 1.41.12 (17-May-2010)
/dev/sdah is entire device, not just one partition!
Proceed anyway? (y,n) y
Filesystem label=
OS type: Linux
Block size=4096 (log=2)
Fragment size=4096 (log=2)
Stride=1 blocks, Stripe width=16 blocks
327680 inodes, 1310720 blocks
65536 blocks (5.00%) reserved for the super user
First data block=0
Maximum filesystem blocks=1342177280
40 block groups
32768 blocks per group, 32768 fragments per group
8192 inodes per group
Superblock backups stored on blocks:
    32768, 98304, 163840, 229376, 294912, 819200, 884736

Writing inode tables: done
Creating journal (32768 blocks): done
Writing superblocks and filesystem accounting information: done

This filesystem will be automatically checked every 25 mounts or
180 days, whichever comes first. Use tune2fs -c or -i to override.
```

## 4.5. Mounting the formatted LUN

The formatted LUN can be mounted on the specified mountpoint using the following command:


```
[root@host~]# mount /dev/sdx /mnt
```

```
[root@ ~]# mount /dev/sdah /mnt/
[root@ ~]# mount
/dev/sdbo5 on / type ext4 (rw)
proc on /proc type proc (rw)
sysfs on /sys type sysfs (rw)
devpts on /dev/pts type devpts (rw,gid=5,mode=620)
tmpfs on /dev/shm type tmpfs (rw)
/dev/sdb01 on /boot type ext3 (rw)
none on /proc/sys/fs/binfmt_misc type binfmt_misc (rw)
/tmp on /tmp type none (rw,bind)
/var/tmp on /var/tmp type none (rw,bind)
/home on /home type none (rw,bind)
sunrpc on /var/lib/nfs/rpc_pipefs type rpc_pipefs (rw)
none on /sys/kernel/debug type debugfs (rw)
gvfs-fuse-daemon on /root/.gvfs type fuse.gvfs-fuse-daemon (rw,nosuid,nodev)
/dev/sdah on /mnt type ext3 (rw)
```

## 5. Software/Driver Unloading

To unload the driver, run the following command:

```
[root@host~]# modprobe -r csiostor
```


 **Note** *If multipath services are running, unload of FCoE driver is not possible. Stop the multipath service and then unload the driver.*

## XXVI. Offload Bonding

# 1. Introduction

The Chelsio Offload bonding driver provides a method to aggregate multiple network interfaces into a single logical bonded interface effectively combining the bandwidth into a single connection. It also provides redundancy in case one of link fails.

The traffic running over the bonded interface can be fully offloaded to the adapter, thus freeing the CPU from TCP/IP overhead.

 **Note** *This is supported only on T6/T5 family of adapters.*

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Offload Bonding driver is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.


## 2. Software/Driver Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install the Chelsio Offload bonding driver.

```
[root@host~]# make bonding_install
```

 **Note** For more installation options, run `make help` or `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 3. Software/Driver Loading



**Important**

*Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

The driver must be loaded by the root user. Any attempt to load the driver as a regular user will fail.

To load the driver (with offload support), run the following command:

```
[root@host~]# modprobe bonding
```

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Offloading TCP traffic over a bonded interface

The Chelsio Offload Bonding driver supports all the bonding modes in NIC Mode. In offload mode (t4\_tom loaded) however, only the **balance-rr (mode=0)**, **active-backup (mode=1)**, **balance-xor (mode=2)** and **802.3ad (mode=4)** modes are supported.

To offload TCP traffic over a bond interface, use the following method:

1. Load the network driver with TOE support.


```
[root@host~]# modprobe t4_tom
```

2. Create a bond interface.

```
[root@host~]# modprobe bonding mode=1 miimon=100 max_bonds=1
```

3. Bring up the bond interface and enslave the interfaces to the bond.

```
[root@host~]# ifconfig bond0 up  
[root@host~]# ifenslave bond0 ethX ethY
```

 **Note** *ethX and ethY are interfaces of the same adapter.*

4. Assign IPv4/IPv6 address to the bond interface.

```
[root@host~]# ifconfig bond0 X.X.X.X/Y  
[root@host~]# ifconfig bond0 inet6 add <128-bit IPv6 Address> up
```

5. Disable FRTO on the PEER.

```
[root@host~]# sysctl -w net.ipv4.tcp_frto=0
```

6. Ping the PEER interface and verify the successful connectivity over the bond interface.

All TCP traffic will be offloaded over the bond interface now.

## 5. Software/Driver Unloading

To unload the driver, run the following command:

```
[root@host~]# rmmod bonding
```


## XXVII. UDP Segmentation Offload and Pacing

# 1. Introduction

Chelsio's Terminator series of adapters provide UDP segmentation offload and per-stream rate shaping to drastically lower server CPU utilization, increase content delivery capacity, and improve service quality.

Tailored for UDP content, UDP Segmentation Offload (USO) technology moves the processing required to packetize UDP data and rate control its transmission from software running on the host to the network adapter. USO increases performance and dramatically reduces CPU overhead, allowing significantly higher capacity using the same server hardware. Without USO support, UDP server software running on the host needs to packetize payload into frames, process each frame individually through the network stack and schedule individual frame transmission, resulting in millions of system calls, and packet traversals through all protocol layers in the operating system to the network device. In contrast, USO implements the network protocol stack in the adapter, and the host server software simply hands off unprocessed UDP payload in large I/O buffers to the adapter.

The following figure compares the traditional datapath on the left to the USO datapath on the right, showing how per-frame processing is eliminated. In this example, the video server pushes 5 frames at a time. In an actual implementation, a video server pushes 50 frames or more in each I/O, drastically lowering the CPU cycles required to deliver the content.

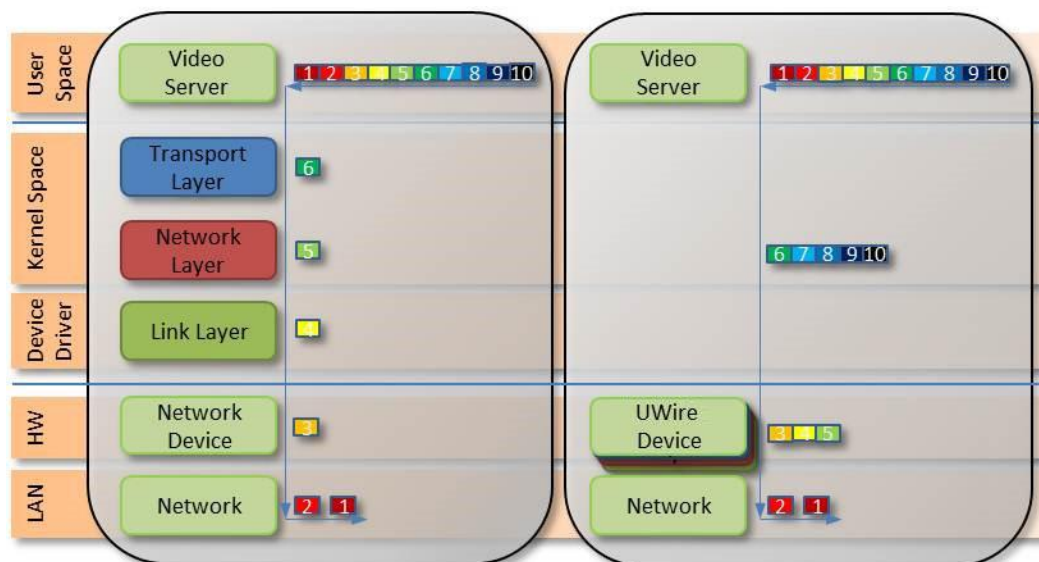

Pacing is beneficial for several reasons, one example is for Content Delivery Networks (CDNs)/Video On Demand (VOD) providers to avoid receive buffer overflows, smooth out network traffic, or to enforce Service Level Agreements (SLAs).

**Note** This is supported only on T6/T5 family of adapters.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the UDP Segmentation Offload and Pacing driver is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Software/Driver Installation

The offload drivers support UDP Segmentation Offload with limited number of connections (1024 connections). To build and install UDP Offload drivers which support large number of offload connections (approx 10K):

**Note** *10K UDP Segmentation offload connections currently not supported on T6.*

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Run the following command:

```
[root@host~]# make udp_offload_install
```

**Note** *For more installation options, run `make help` or `install.py -h`.*

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 3. Software/Driver Loading

**Important**

*Ensure that all inbox drivers are unloaded before proceeding with Unified Wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

The driver must be loaded by the root user. Any attempt to load the driver as a regular user will fail.

Run the following commands to load the drivers.

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe t4_tom
```

Though normally associated with the Chelsio TCP Offload engine, the `t4_tom` module is required to allow for the proper redirection of UDP socket calls.

## 4. Software/Driver Configuration and Fine-tuning

### 4.1. Modifying the Application

To use the UDP offload functionality, the application needs to be modified. Follow the steps mentioned below:

1. Determine the UDP socket file descriptor in the application through which data is sent.
2. Declare and initialize two variables in the application.

```
int fs=1316;  
int cl=1;
```

Here,

- *fs* is the UDP packet payload size in bytes that is transmitted on the wire. The minimum value of *fs* is 256 bytes.
- *cl* is the UDP traffic class (scheduler-class-index) that the user wishes to assign the data stream to. This value needs to be in the range of 0 to 14 for T4/T5 adapters and 0 to 30 for T6 adapters.

The application functions as per the parameters set for that traffic class.

3. Add socket option definitions.

To use `setsockopt()` to set the options to the UDP socket, set the following three definitions:

- `SO_FRAME_SIZE` used for setting frame size, which has the value 291.
- `SOL_SCHEDCLASS` used for setting UDP traffic class, which has the value 290.
- `IPPROTO_UDP` used for setting the type of IP Protocol.

```
# define SO_FRAME_SIZE 291  
# define SOL_SCHEDCLASS 290  
# define IPPROTO_UDP 17
```

4. Use the `setsockopt()` function to set socket options.

```
//Get the UDP socket descriptor variable  
setsockopt (sockfd , IPPROTO_UDP, SO_FRAME_SIZE, &fs, sizeof(fs));  
setsockopt (sockfd , IPPROTO_UDP, SOL_SCHEDCLASS, &cl, sizeof(cl));
```

Here:

- *sockfd* : The file descriptor of the UDP socket
- *&fs / &cl* : Pointer to the framesize and class variables
- *sizeof(fs) / sizeof(cl)* : The size of the variables

5. Now, compile the application.

### 4.1.1. UDP offload functionality for RTP data

For the RTP data, the video server application sends the initial sequence number and the RTP payload. The USO engine segments the payload data, increments the sequence number, and sends out the data.

In order to use the UDP offload functionality for RTP data, make the following additions to the steps mentioned above:

1. In step 2, declare and initialize a new variable in the application.

```
int rtp_header_size=16;
```

Here, *rtp\_header\_size* is the RTP header size in bytes that the application sends.

2. In step 3, define a new macro, *UDP\_RTPHEADERLEN* used for setting RTP header length with the value 292.

```
# define UDP_RTPHEADERLEN 292
```

3. In step 4, define a new socket option.

```
setsockopt (sockfd,17,UDP_RTPHEADERLEN,&rtp_header_size,  
sizeof(rtp_header_size));
```

Here,

- *&rtp\_header\_size*: pointer to the RTP header length variable
- *sizeof(rtp\_header\_size)*: the size of the RTP header length variable

## 4.2. Configuring UDP Pacing

Now that the application has been modified to associate the application's UDP socket to a particular UDP traffic class, the pacing of that socket's traffic can be set using the `cxgbtool` utility.

1. Bring up the network interface.

```
[root@host~]# ifconfig <ethX> up
```

2. Run the following command.

```
[root@host~]# cxgbtool <ethX> sched-class params type packet level cl-rl
mode flow rate-unit bits rate-mode absolute channel <Channel No.> class
<scheduler-class-index> max-rate <maximum-rate> pkt-size <Packet size>
```

Here,

- `ethX` is the Chelsio interface
- `Channel No.` is the port on which data is flowing (0-3)
- `scheduler-class-index` is the UDP traffic class (0-14 for T4/T5 adapters and 0-30 for T6 adapters) set in the `SOL_SCHEDCLASS` socket option in the application in section 4.1.
- `maximum-rate` is the bit rate (Kbps) for this UDP stream. This value should be in the range of 50 Kbps to 50 Mbps for T4 adapters. For T5/T6 adapters, the value should be in the range of 100 kbps to 1 Gbps.
- `Packet size` is the UDP packet payload size in bytes; it should be equal to the value set in the `SO_FRAME_SIZE` socket option in the application in section 4.1.

*Example:*

The user wants to transfer UDP data on port 0 of the adapter using the USO engine. The application has been modified as shown in section 4.1. To set a bit rate of 10Mbps for traffic class 1 with payload size of 1316 on port 0, the following invocation of `cxgbtool` is used:

```
[root@host~]# cxgbtool ethX sched-class params type packet level cl-rl mode
flow rate-unit bits rate-mode absolute channel 0 class 1 max-rate 10000
pkt-size 1316
```



**Note** To get an accurate bit rate per class, data sent by the application to the sockets should be a multiple of the value set for the “pkt-size” parameter. In above example, IO size sent by application should be a multiple of 1316.

**Note**

*Linux Unified Wire currently supports 10240 offload UDP connections. If the application needs to establish more than 10240 UDP connections, it can check the return code of `ENOSPC` from a `send()` or `sendto()` call and close this socket and open a new one that uses the kernel UDP stack.*

## 4.3. Enabling Offload

Load the offload drivers and bring up the Chelsio interface.

```
[root@host~]# modprobe t4_tom
[root@host~]# ifconfig ethX <IP> up
```

The traffic will be offloaded over the Chelsio interface now. To see the number of connections offloaded, run the following command:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<bus-id>/tids
```

```
[root@host ~]# cat /sys/kernel/debug/cxgb4/0000\:81\:00.4/tids
Connections in use: 0
TID range: 64..2047/3072..19455, in use: 0/0
STID range: 2048..2543, in use-IPv4/IPv6: 0/0
ATID range: 0..8191, in use: 0
FTID range: 2560..3055
HPFTID range: 0..63
UOTID range: 19456..20479, in use: 5
HW TID usage: 0 IP users, 0 IPv6 users
```

Where,

*UOTID* is the number of UDP offload connections.

## 5. Software/Driver Unloading

Reboot the system to unload the driver. To unload without rebooting, refer to the [Unloading the TOE driver](#) section of **Network (NIC/TOE)** chapter.

## XXVIII. Offload IPv6

# 1. Introduction

The growth of the Internet has created a need for more addresses than possible with IPv4. Internet Protocol version 6 (IPv6) is a version of the Internet Protocol (IP) designed to succeed the Internet Protocol version 4 (IPv4).

Chelsio's Offload IPv6 feature provides support to fully offload IPv6 traffic to the Unified Wire adapter.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapters:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Offload IPv6 feature is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

---

## 2. Software/Driver Installation

### 2.1. Pre-requisites

Ensure that the following requirements are met before driver installation:

- IPv6 must be enabled in your system (enabled by default).
- Unified Wire must be installed with IPv6 support as explained in the [Unified Wire](#) chapter.


### 2.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install Unified Wire with IPv6 support.

```
[root@host~]# make install
```

 **Note** For more installation options, run `make help` or `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

---

## 3. Software/Driver Loading

**! Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

After installing Unified Wire package and rebooting the host, load the NIC (*cxgb4*) and TOE (*t4\_tom*) drivers. The drivers must be loaded by the root user. Any attempt to load the drivers as a regular user will fail.

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe t4_tom
```

## 4. Software/Driver Configuration and Fine-tuning

1. Load the Offload capable drivers.

```
[root@host~]# modprobe t4_tom
```

2. Bring up the interface and ensure that IPv6 Link Local address is present.

```
[root@host~]# ifconfig ethX up
```

```
enp6s0f4d1: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
  inet6 fe80::207:43ff:fe4a:8ab8 prefixlen 64 scopeid 0x20<link>
  ether 00:07:43:4a:8a:b8 txqueuelen 1000 (Ethernet)
  RX packets 1532 bytes 128688 (125.6 KiB)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 2289 bytes 215930 (210.8 KiB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
  device interrupt 232
```

On some distributions, `ONBOOT="yes"` should be added to interface network script for the interface to come up automatically with IPv6 Link Local address.

3. Configure the required IPv6 address.

```
[root@host~]# ifconfig ethX inet6 add <IPv6 address>
```

4. All the IPv6 traffic over the Chelsio interface will be offloaded now. To see the number of connections offloaded, run the following command:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<bus-id>/tids
```

## 5. Software/Driver Unloading

### 5.1. Unloading the NIC Driver

---

To unload the NIC driver, run the following command:

```
[root@host~]# rmmod cxgb4
```

### 5.2. Unloading the TOE Driver

---

Reboot the system to unload the TOE driver. To unload without rebooting, refer to the [Unloading the TOE driver](#) section of **Network (NIC/TOE)** chapter.

## XXIX. WD Sniffing and Tracing


---


## 1. Theory of Operation

The objective of these utilities (*wd\_sniffer* and *wd\_tcpdump\_trace*) is to provide sniffing and tracing capabilities by making use of the Chelsio adapter's hardware features.

- Sniffer is a tool to measure bandwidth and involves targeting specific multicast traffic and sending it directly to user space.
  1. Get a Queue (raw QP) idx.
  2. Program a filter to redirect specific traffic to the raw QP queue.
- Tracer - All tapped traffic is forwarded to user space and also pushed back on the wire through the internal loop back mechanism.
  1. Get a Queue (raw QP) idx.
  2. Set the adapter in loop back.
  3. Connect Client A and B to ports 0 and 1 or ports 2 and 3.
  4. Enable tracing.

In either mode, the targeted traffic bypasses the kernel TCP/IP stack and is delivered directly to user space by means of an RX queue.

 **Note** *This is supported only on T6/T5 family of adapters.*

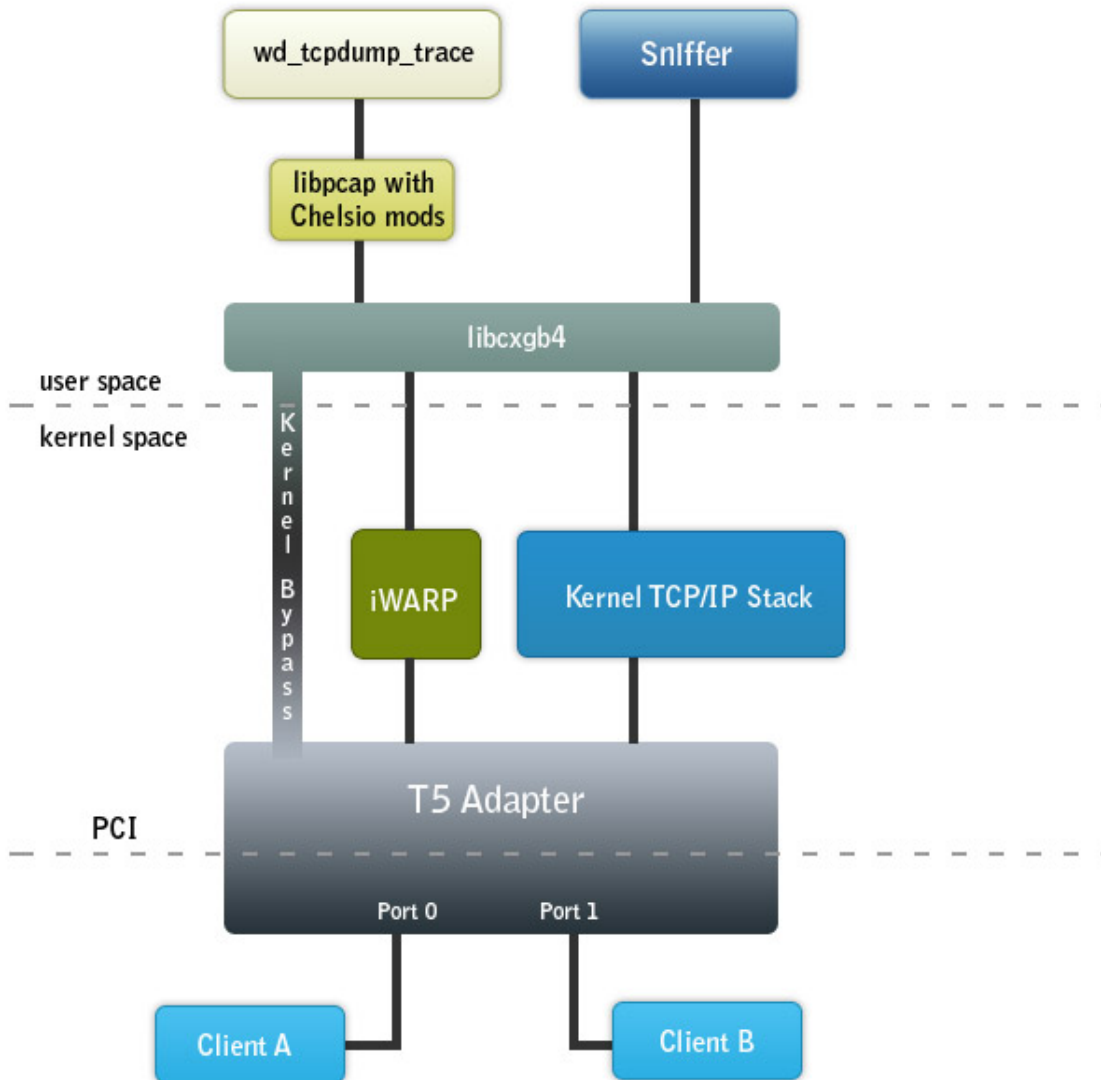

*Schematic diagram of sniffer and tracer*

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the WD Sniffing and Tracing utility is available for the following kernel versions:

- Kernel.org linux-6.12.91\*
- Kernel.org linux-6.18.33\*
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

\* Kernel must be compiled on RHEL 10.X/9.7/9.6.

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Software/Driver Installation

### 2.1. Pre-requisites

Ensure that the following requirement is met before driver installation:

- IOMMU should be disabled by adding `intel_iommu/amd_iommu=off` to the grub/grub2 kernel command line.

### 2.2. Installation

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install Sniffer and Tracer utilities and iWARP driver.

```
[root@host~]# make sniffer_install
```

**Note** For more installation options, run `make help` or `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

## 3. Usage

### 3.1. Installing Basic Support

*iw\_cxgb4* (Chelsio iWARP driver) and *cxgb4* (Chelsio NIC driver) drivers should be compiled and loaded before running the utilities. Refer to the **Software/Driver Loading** section for each driver and follow the instructions mentioned before proceeding.

### 3.2. Using Sniffer (*wd\_sniffer*)

#### 1. Setup

Wire filter sniffing requires 2 systems with one machine having a Chelsio card.

The machines should be setup in the following manner:

```
Machine A  <-----> Machine B
192.168.1.100      192.168.1.200
```

#### 2. Procedure

On the Device Under Test (DUT), start sniffer.

```
[root@host~]# wd_sniffer -T 20 -s 1000 -I <MAC address of interface to sniff>
```


Start traffic on the PEER and watch the sniffer.

The sniffer will receive all packets as fast as possible, update the packet count, and then discard the data. Performance is a full 10Gbps for packet size 1000.

### 3.3. Using Tracer (`wd_tcpdump_trace`)

#### 1. Setup

Wire tapping requires three systems with one machine having a Chelsio card with two or more ports. The machines should be set up in the following manner:

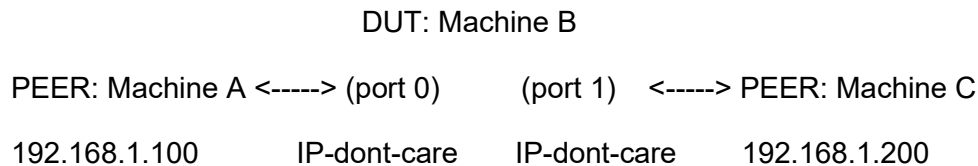


#### 2. Procedure

Run `wd_tcpdump_trace -i iface` on the command prompt where *iface* is one of the interfaces whose traffic you want to trace. In the above diagram it is port 0 or port 1.

```
[root@host~]# wd_tcpdump_trace -i <iface>
```

Use any tool (like ping or ssh) to run traffic between machines A and B. The traffic should successfully make it from end to end and `wd_tcpdump_trace` on the DUT should show the tapped traffic. The below options can be provided additionally to capture more packets.

```
[root@host~]# wd_tcpdump_trace -i <iface> -s 64 -B 1024000 -w capture.pcap
```

 **Note** Refer to `wd_tcpdump_trace -h` for more information on the above options.

## XXX. Classification and Filtering

## 1. Introduction

Classification and Filtering feature enhances network security by controlling incoming traffic as they pass through the network interface based on source and destination addresses, protocol, source and receiving ports, or the value of some status bits in the packet. This feature can be used in the ingress path to:

- Steer ingress packets that meet ACL (Access Control List) accept criteria to a particular receive queue.
- Switch (proxy) ingress packets that meet ACL accept criteria to an output port, with optional header rewrite.
- Drop ingress packets that meet ACL accept criteria.

### 1.1. Hardware Requirements

---

#### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapters:
  - T72200-FH
  - T72200
  - T7450
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Classification and Filtering feature is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. LE-TCAM Filters

The default (*Unified Wire*) configuration tuning option allows you to create LE-TCAM filters, which has a limit of 496 for T5 and 560 for T6 adapters. For T5 adapters, all available filter indices can be optionally configured as high priority. For T6 adapters, the following filter indices are available:

- High priority indices (PRIO): 0 to X
- Normal indices: X+1 to X+1+495

Where X is the upper limit in the *HPFTID range*, mentioned in the *tids* file (`/sys/kernel/debug/cxgb4/<bus-id>/tids`).

```
[root@ ~]# cat /sys/kernel/debug/cxgb4/0000\:02\:00.4/tids
Connections in use: 0
TID range: 64..2047/3072..19455, in use: 0/0
STID range: 2048..2543, in use-IPv4/IPv6: 0/0
ATID range: 0..8191, in use: 0
FTID range: 2560..3055
HPFTID range: 0..63
UOTID range: 19456..20479, in use: 0
HW TID usage: 0 IP users, 0 IPv6 users
```

For example, if the upper *hpftid* limit is 63, then high priority indices will be from 0 to 63 and normal indices will be from 64 to 559. It is mandatory to add **prio 1** when creating high priority filter rules.

**Note** *T6 SO adapters currently do not support high priority indices. Therefore only 496 LE-TCAM filters can be created.*

### 2.1. Configuration

#### 2.1.1. Filter Modes

The Classification and Filtering feature is configured by specifying the filter modes in the firmware configuration file (*t6-config.txt* for T6 adapters; *t5-config.txt* for T5 adapters) located in `/lib/firmware/cxgb4/`. The following filter tuples are present in filter modes:

<i>fcoe</i>	: Fibre Channel over Ethernet frames
<i>port</i>	: Packet ingress physical port number
<i>vnid_id</i>	: VF ID in MPS TCAM ( <i>Currently not supported</i> ) and outer VLAN ID, Encapsulation
<i>vlan</i>	: Inner VLAN ID
<i>Tos</i>	: Type of Service
<i>protocol</i>	: IP protocol number (ICMP=1, TCP=6, UDP=17, etc)
<i>Ethertype</i>	: Layer 2 EtherType
<i>Macmatch</i>	: MAC index in MPS TCAM
<i>mpshittype</i>	: MAC address "match type" (none, unicast, multicast, promiscuous, broadcast)
<i>fragmentation</i>	: Fragmented IP packets

**Note** Adapter initialization will fail if *filterMask* contains a tuple which is not present in *filterMode*.

## 2.1.2. Supported Filter Combinations

The following combination is set by default and packets will be matched accordingly:

- For T5/T6:

```
filterMode = fcoemask, srvrstram, fragmentation, mpshittype, protocol, vlan,
port, fcoe
```

- For T4:

```
filterMode = fragmentation, mpshittype, protocol, vlan, port, fcoe
```

Serial #	Filter Combination
1	<i>fragmentation, mpshittype, macmatch, ethertype, protocol, port</i>
2	<i>fragmentation, mpshittype, macmatch, ethertype, protocol, fcoe</i>
3	<i>fragmentation, mpshittype, macmatch, ethertype, tos, port</i>
4	<i>fragmentation, mpshittype, macmatch, ethertype, tos, fcoe</i>
5	<i>fragmentation, mpshittype, macmatch, ethertype, port, fcoe</i>
6	<i>fragmentation, mpshittype, macmatch, protocol, tos, port, fcoe</i>
7	<i>fragmentation, mpshittype, macmatch, protocol, vlan, fcoe</i>
8	<i>fragmentation, mpshittype, macmatch, protocol, vnic_id, fcoe</i>
9	<i>fragmentation, mpshittype, macmatch, tos, vlan, fcoe</i>
10	<i>fragmentation, mpshittype, macmatch, tos, vnic_id, fcoe</i>
11	<i>fragmentation, mpshittype, macmatch, vlan, port, fcoe</i>
12	<i>fragmentation, mpshittype, macmatch, vnic_id, port, fcoe</i>
13	<i>fragmentation, mpshittype, ethertype, protocol, tos, port, fcoe</i>
14	<i>fragmentation, mpshittype, ethertype, vlan, port</i>
15	<i>fragmentation, mpshittype, ethertype, vlan, fcoe</i>
16	<i>fragmentation, mpshittype, ethertype, vnic_id, port</i>
17	<i>fragmentation, mpshittype, ethertype, vnic_id, fcoe</i>
18	<i>fragmentation, mpshittype, protocol, tos, vlan, port</i>
19	<i>fragmentation, mpshittype, protocol, tos, vlan, fcoe</i>
20	<i>fragmentation, mpshittype, protocol, tos, vnic_id, port</i>
21	<i>fragmentation, mpshittype, protocol, tos, vnic_id, fcoe</i>
22	<i>fragmentation, mpshittype, protocol, vlan, port, fcoe</i>
23	<i>fragmentation, mpshittype, protocol, vnic_id, port, fcoe</i>
24	<i>fragmentation, mpshittype, tos, vlan, port, fcoe</i>
25	<i>fragmentation, mpshittype, tos, vnic_id, port, fcoe</i>
26	<i>fragmentation, mpshittype, vlan, vnic_id, fcoe</i>
27	<i>fragmentation, macmatch, ethertype, protocol, port, fcoe</i>
28	<i>fragmentation, macmatch, ethertype, tos, port, fcoe</i>
29	<i>fragmentation, macmatch, protocol, vlan, port, fcoe</i>
30	<i>fragmentation, macmatch, protocol, vnic_id, port, fcoe</i>
31	<i>fragmentation, macmatch, tos, vlan, port, fcoe</i>
32	<i>fragmentation, macmatch, tos, vnic_id, port, fcoe</i>
33	<i>fragmentation, ethertype, vlan, port, fcoe</i>

34	<i>fragmentation, ethertype, vnic_id, port, fcoe</i>
35	<i>fragmentation, protocol, tos, vlan, port, fcoe</i>
36	<i>fragmentation, protocol, tos, vnic_id, port, fcoe</i>
37	<i>fragmentation, vlan, vnic_id, port, fcoe</i>
38	<i>mpshittype, macmatch, ethertype, protocol, port, fcoe</i>
39	<i>mpshittype, macmatch, ethertype, tos, port, fcoe</i>
40	<i>mpshittype, macmatch, protocol, vlan, port</i>
41	<i>mpshittype, macmatch, protocol, vnic_id, port</i>
42	<i>mpshittype, macmatch, tos, vlan, port</i>
43	<i>mpshittype, macmatch, tos, vnic_id, port</i>
44	<i>mpshittype, ethertype, vlan, port, fcoe</i>
45	<i>mpshittype, ethertype, vnic_id, port, fcoe</i>
46	<i>mpshittype, protocol, tos, vlan, port, fcoe</i>
47	<i>mpshittype, protocol, tos, vnic_id, port, fcoe</i>
48	<i>mpshittype, vlan, vnic_id, port</i>

**Important** Using any other filter mode combination is strictly not supported.

### 2.1.3. Changing default filter mode

Based on your requirement, you can change the default filter mode to any one of the combinations mentioned in the table above. To do so, replace the default mode with the chosen mode in firmware configuration file (*t6-config.txt* for T6 adapters; *t5-config.txt* for T5 adapters) located in */lib/firmware/cxgb4/*.

For example, if you want to filter traffic based on *ethertype* value in the packets for T6 adapters, replace the default filterMode,

```
filterMode = fcoemask, srvrssram, fragmentation, mpshittype, protocol, vlan,
port, fcoe
```

with

```
filterMode = fragmentation, mpshittype, macmatch, ethertype, protocol, port
```

The network driver needs to be reloaded next using the following command:

```
[root@host~]# rmmod cxgb4
[root@host~]# modprobe cxgb4
```

## 2.2. Creating Filter Rules

Network driver (*cxgb4*) must be installed and loaded before setting the filter rule.

1. If you have not done already, run the Unified Wire Installer with the appropriate configuration tuning option to install the network driver.
2. Load the network driver and bring up the Chelsio interface.


```
[root@host~]# modprobe cxgb4
[root@host~]# ifconfig ethX up
```

3. Now, create filter rules using *cxgbtool*.

```
[root@host~]#cxgbtool ethx filter <index> action [pass/drop/switch] <prio 1>
<hitcnts 1>
```

Where,

*ethX* : Chelsio interface  
*index* : positive number set as filter id. 0-495 for T5 adapters; 0-559 for T6 adapters.  
 Should be an even number while creating IPv6 filter.  
*action* : Ingress packet disposition  
*pass* : Ingress packets will be passed through set ingress queues  
*switch* : Ingress packets will be routed to an output port with optional header rewrite.  
*drop* : Ingress packets will be dropped.  
*prio 1* : Optional for T5.  
 Mandatory for T6 indices 0-63; Should not be added for T6 indices 64-559  
*hitcnts 1* : To enable hit counts in *cxgbtool* filter show output.

 **Note** *In case of multiple filter rules, the rule with the lowest filter index takes higher priority.*

### 2.2.1. Examples

- **drop action**

```
[root@host~]# cxgbtool ethX filter 100 action drop fip 192.168.1.5
```

The above filter rule will drop all ingress packets from source IP 192.168.1.5. Remaining packets will be sent to the host.

- **pass action**

```
[root@host~]# cxgbtool ethX filter 100 action pass lport 10001 fport 355
queue 2
```

The above filter rule will pass all ingress packets that match destination port 10001 and source port 355 to ingress queue 2 for load balancing. Remaining packets will be sent to the host.

- **switch action**

```
[root@host~]# cxgbtool ethX filter 100 action switch iport 0 eport 1 ivlan 3
```

The above filter rule will route all ingress packets that match VLAN id 3 from port 0 of Chelsio adapter to port 1. Remaining packets will be sent to the host.

- **prio option**

To filter offloaded ingress packets, use the `prio` argument with the above command:

```
[root@host~]# cxgbtool ethx filter <index> action <pass/drop/switch> prio 1
```

Where index is a positive integer set as filter id. 0-495 for T5 adapters and 0-63 for T6 adapters.

**Note** For more information on additional parameters, refer `cxgbtool` manual by running the `man cxgbtool` command.

## 2.3. Listing Filter Rules

---

To list the filters set, run the following command:

```
[root@host~]# cxgbtool ethX filter show
```

OR

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<bus-id>/filters
```

## 2.4. Removing Filter Rules

---


To remove a filter, run the following command with the corresponding filter rule index:

```
[root@host~]# cxgbtool ethX filter <index> <delete|clear>
```

**Note** For more information on additional parameters, refer `cxgbtool` manual by running the `man cxgbtool` command

## 2.5. Layer 3 Example

The following example illustrates how to achieve Layer 3 (L3) routing functionality:

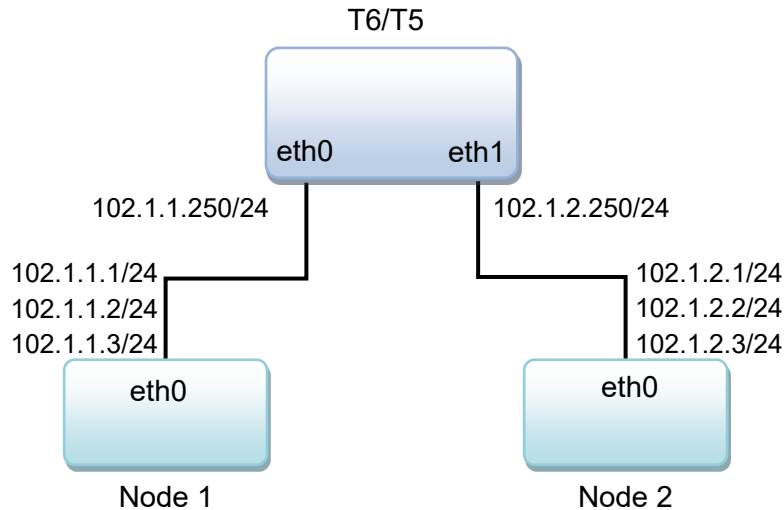

- **Follow these steps on Node 1**

1. Configure IP address and enable the 3 interfaces.

```
[root@host~]# ifconfig eth0 102.1.1.1/24 up
[root@host~]# ifconfig eth0:2 102.1.1.2/24 up
[root@host~]# ifconfig eth0:3 102.1.1.3/24 up
```

2. Setup a static OR default route towards T6/T5 router to reach 102.1.2.0/24 network.

```
[root@host~]# route add -net 102.1.2.0/24 gw 102.1.1.250
```

- **Follow these steps on Node 2**

1. Configure IP address and enable the three interfaces.

```
[root@host~]# ifconfig eth0 102.1.2.1/24 up
[root@host~]# ifconfig eth0:2 102.1.2.2/24 up
[root@host~]# ifconfig eth0:3 102.1.2.3/24 up
```

2. Setup a static OR default route towards T6/T5 router to reach 102.1.1.0/24 network.

```
[root@host~]# route add -net 102.1.1.0/24 gw 102.1.2.250
```

- **Follow these steps on machine with T6/T5 adapter**

1. Configure IP address and enable the 2 interfaces.

```
[root@host~]# ifconfig eth0 102.1.1.250/24 up
[root@host~]# ifconfig eth1 102.1.2.250/24 up
```

2. Create filter rule to send packets for 102.1.2.0/24 network out via eth1 interface.

```
[root@host~]# cxgbtool eth0 filter 100 lip 102.1.2.0/24 hitcnts 1 action
switch eport 1 smac 00:07:43:04:96:48 dmac 00:07:43:12:D4:88
```

Where, `smac` is the MAC address of eth1 interface on T6/T5 adapter machine and `dmac` is the MAC address of eth0 interface on Node 2.


3. Create filter rule to send packets for 102.1.1.0/24 network out via eth0 interface.

```
[root@host~]# cxgbtool eth0 filter 101 lip 102.1.1.0/24 hitcnts 1 action
switch eport 0 smac 00:07:43:04:96:40 dmac 00:07:43:04:7D:50
```

Where, `smac` is the MAC address of eth0 interface on T6/T5 adapter machine and `dmac` is the MAC address of eth0 interface on Node 1.

## 2.6. Layer 2 Example

Here is an example to achieve L2 switching functionality. The following will only work on kernel 3.10 and above.

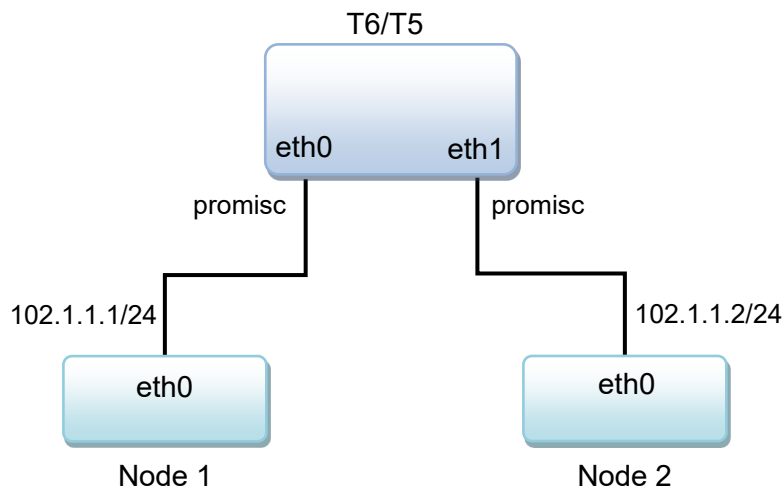

- **Follow these steps on Node 1**

- i. Configure IP address and enable the interface.

```
[root@host~]# ifconfig eth0 102.1.1.1/24 up
```

- ii. Setup ARP entry to reach 102.1.1.2

```
[root@host~]# arp -s 102.1.1.2 00:07:43:12:D4:88
```

- **Follow these steps on Node 2**

- i. Configure IP address and enable the interface.

```
[root@host~]# ifconfig eth0 102.1.1.2/24 up
```

- ii. Setup ARP entry to reach 102.1.1.1

```
[root@host~]# arp -s 102.1.1.1 00:07:43:04:7D:50
```

- **Follow these steps on machine with T6/T5 adapter**

1. Update filterMode value with below combination in */lib/firmware/cxgb4/t6-config.txt* to enable matching based on macidx (use *t5-config.txt* for T5 adapters).

```
filterMode = fragmentation, macmatch, mpshittype, protocol, tos, port, fcoe
```

2. Unload and re-load the *cxgb4* driver.
3. Enable promiscuous mode on both the interfaces on T6/T5 adapter machine.

```
[root@host~]# ifconfig eth0 up promisc  
[root@host~]# ifconfig eth1 up promisc
```

4. Build and install the latest *iproute2* package.
5. Add fdb entry corresponding to Node-2 on T6/T5's eth0 interface.

```
[root@host~]# bridge fdb add 00:07:43:12:D4:88 dev eth0 self
```

6. Add fdb entry corresponding to Node-1 on T6/T5's eth1 interface.

```
[root@host~]# bridge fdb add 00:07:43:04:7D:50 dev eth1 self
```

- Both MAC entries should show up in MPS table. Run the following command to view the table and note the index (*idx* field) of the entries:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/0000\:01\:00.4/mps_tcam | more
```

- Create a filter to match incoming packet's *dst-mac 00:07:43:12:d4:88* with particular mac-idx and switch it out via eport 1.

```
[root@host~]# cxgbtool eth0 filter 100 macidx 5 action switch eport 1  
hitcnts 1
```

- Create a filter to match incoming packet's *dst-mac 00:07:43:04:7d:50* with particular mac-idx and switch it out via eport 0.

```
[root@host~]# cxgbtool eth0 filter 101 macidx 7 action switch eport 0  
hitcnts 1
```

## 2.7. Filtering VF traffic

To filter VF traffic, replace the default filterMode in the firmware configuration file (*t6-config.txt* for T6 adapters; *t5-config.txt* for T5 adapters) located in */lib/firmware/cxgb4/* with any combination containing *vnic\_id*.

```
filterMode = fragmentation, mpshittype, protocol, tos, vnic_id, port
```

The network driver needs to be reloaded next using the following command:

```
[root@host~]# rmmmod cxgb4  
[root@host~]# modprobe cxgb4
```

Instantiate the required VFs on the host and assign them to the Virtual Machines (VMs). Bring up the VFs in the VMs and note the corresponding MAC addresses.

**Note** For information on VFs and instantiating them, refer to the [Instantiate Virtual Functions \(SR-IOV\)](#) section of the **Virtual Function Network (vNIC)** chapter.

On the host, check the MPS TCAM entry for the VF MAC and note the corresponding VF ID.

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<pci_bus_id>/mps_tcam | less
```

Idx	Ethernet address	Mask	VNI	Mask	IVLAN	Vld	DIP_Hit	Lookup	Port	Vld	Ports	PF	VF
0	01:80:c2:00:00:0e	ffffffffffff	-	-	-	N	-	0	0	Y	0x3	7	104
1	00:00:00:00:00:00	ffffffffffff	-	-	-	N	-	0	0	Y	0x3	4	68
2	00:07:43:3c:a8:40	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	4	68
3	01:00:5e:00:00:01	ffffffffffff	-	-	-	N	-	0	0	Y	0x3	4	68
4	00:07:43:3c:a8:48	ffffffffffff	-	-	-	N	-	0	0	Y	0x2	4	69
5	33:33:00:00:00:01	ffffffffffff	-	-	-	N	-	0	0	Y	0x3	4	68
6	33:33:ff:3c:a8:40	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	4	68
7	33:33:ff:3c:a8:48	ffffffffffff	-	-	-	N	-	0	0	Y	0x2	4	69
8	06:44:3c:a8:40:00	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	0	0
9	06:44:3c:a8:40:01	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	0	1
10	06:44:3c:a8:40:02	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	0	2
11	06:44:3c:a8:40:03	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	0	3
12	06:44:3c:a8:40:04	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	0	4
13	06:44:3c:a8:40:05	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	0	5
14	06:44:3c:a8:40:06	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	0	6
15	06:44:3c:a8:40:07	ffffffffffff	-	-	-	N	-	0	0	Y	0x1	0	7
16	-	-	-	-	-	-	-	-	-	-	-	-	-

Apply filter rules on the Host using *cxgbtool*.

```
[root@host~]# cxgbtool ethX filter <index> vf <vf_id> action
[pass/drop/switch]
```

*Example:*

1. 4 VFs (VF0, VF1, VF2, Vf3) are instantiated on PF0.

```
[root@host~]# modprobe cxgb4
[root@host~]# echo 4 >
/sys/class/net/ethX/device/driver/<bus_id>/sriov_numvfs
```

2. 1 VM was brought up with VF2. *cxgb4vf* was loaded on the VM and the VF was brought up.

```
[root@host~]# ifconfig enp8s2
enp8s2: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
ether 06:44:3c:a8:40:02 txqueuelen 1000 (Ethernet)
```

3. Observe the VF id for the MAC address *06:44:3c:a8:40:02* in *mps\_tcam*.
4. Apply the following filter rule on the host to drop all ingress packets to VF2 originating from source IP 192.168.1.5. Remaining packets will be sent to the VF.

```
[root@host~]# cxgbtool ethX filter 101 vf 2 fip 192.168.1.5 action drop
```

## 3. Hash/DDR Filters

To create the large number of filters, select one of the below configuration tuning options during Unified Wire installation:

- High Capacity Hash Filter: Allows you to create ~0.5 million filter rules. Can run non-offload NIC traffic.
- Unified Wire (Default): Allows you to create ~18k filter rules. Can run all offload traffic.

You can create both LE-TCAM and Hash/DDR filters in the above configurations.

**Note** *T5/T6 SO adapters do not support Hash Filters as they are memory free. Up to 496 LE-TCAM filters are supported with Hash Filter configurations.*

Hash filters are created based on *filterMask* tuples in firmware configuration file (*t6-config.txt* for T6 adapters; *t5-config.txt* for t5 adapters) located in */lib/firmware/cxgb4/*. *filterMask* tuples should be either subset of or equal to *filterMode* tuples.

Hash filters are exact match filters. Hence, when you enable more fields (tuples) in *filterMask*, you must create a filter rule with exactly same tuples as mentioned in *filterMask*.

### 3.1. Configuration

#### 3.1.1. Filter Modes

The Classification and Filtering feature is configured by specifying the filter modes in the firmware configuration file located in */lib/firmware/cxgb4/*

Adapter initialization will fail if *filterMask* contains a tuple which is not present in *filterMode*.

The following are the filter tuples supported with Hash Filters:

<i>fcoe</i>	: Fibre Channel over Ethernet frames
<i>port</i>	: Packet ingress physical port number
<i>vnic_id</i>	: VF ID in MPS TCAM ( <i>Currently not supported</i> ) and outer VLAN ID
<i>vlan</i>	: Inner VLAN ID
<i>tos</i>	: Type of Service
<i>protocol</i>	: IP protocol number (ICMP=1, TCP=6, UDP=17, etc)
<i>ethertype</i>	: Layer 2 EtherType
<i>macmatch</i>	: MAC index in MPS TCAM
<i>mpshittype</i>	: MAC address "match type" (none,unicast,multicast,promiscuous,broadcast)

### 3.1.2. Supported Filter Combinations

The following table lists the supported FilterMode combinations.

Serial #	Filter Combination
1	<i>fragmentation, mpshittype, macmatch, ethertype, protocol, port</i>
2	<i>fragmentation, mpshittype, macmatch, ethertype, protocol, fcoe</i>
3	<i>fragmentation, mpshittype, macmatch, protocol, tos, port, fcoe</i>
4	<i>fragmentation, mpshittype, macmatch, protocol, vlan, fcoe</i>
5	<i>fragmentation, mpshittype, macmatch, protocol, vnic_id, fcoe</i>
6	<i>fragmentation, mpshittype, ethertype, protocol, tos, port, fcoe</i>
7	<i>fragmentation, mpshittype, protocol, tos, vlan, port</i>
8	<i>fragmentation, mpshittype, protocol, tos, vlan, fcoe</i>
9	<i>fragmentation, mpshittype, protocol, tos, vnic_id, port</i>
10	<i>fragmentation, mpshittype, protocol, tos, vnic_id, fcoe</i>
11	<i>fragmentation, mpshittype, protocol, vlan, port, fcoe</i>
12	<i>fragmentation, mpshittype, protocol, vnic_id, port, fcoe</i>
13	<i>fragmentation, macmatch, ethertype, protocol, port, fcoe</i>
14	<i>fragmentation, macmatch, protocol, vlan, port, fcoe</i>
15	<i>fragmentation, macmatch, protocol, vnic_id, port, fcoe</i>
16	<i>fragmentation, protocol, tos, vlan, port, fcoe</i>
17	<i>fragmentation, protocol, tos, vnic_id, port, fcoe</i>
18	<i>mpshittype, macmatch, ethertype, protocol, port, fcoe</i>
19	<i>mpshittype, macmatch, protocol, vlan, port</i>
20	<i>mpshittype, macmatch, protocol, vnic_id, port</i>
21	<i>mpshittype, protocol, tos, vlan, port, fcoe</i>
22	<i>mpshittype, protocol, tos, vnic_id, port, fcoe</i>



**Important**

*Using any other filter mode combination is strictly not supported.*

### 3.1.3. Changing default filter mode

Based on your requirement, you can change the default filter mode to any one of the combinations mentioned above. Replace the default filterMode with the chosen mode in firmware configuration file (*t6-config.txt* for T6 adapters; *t5-config.txt* for T5 adapters) located in */lib/firmware/cxgb4/*.

For example, if you want to filter traffic based on *ethertype* value in the packets for T6 adapters, replace the default filterMode with,

```
filterMode = fragmentation, mpshittype, macmatch, ethertype, protocol, port
```

The network driver needs to be reloaded next using the following command:

```
[root@host~]# rmmod cxgb4
[root@host~]# modprobe cxgb4 use_ddr_filters=1
```

## 3.2. Creating Filter Rules

Network driver (*cxgb4*) must be installed and loaded before setting the filter rule.

1. If you have not done already, run the Unified Wire Installer with the *High Capacity Hash Filter* or *Unified Wire (Default)* configuration tuning option to install the drivers.
2. Load the network driver with DDR filters support and bring up the Chelsio interface.

```
[root@host~]# modprobe cxgb4 use_ddr_filters=1
[root@host~]# ifconfig ethX up
```

3. Now, create filter rules using *cxgbtool*.

```
[root@host~]# cxgbtool ethX filter <index> action [pass/drop/switch] fip
<source_ip> lrp <destination_ip> fport <source_port> lport
<destination_port> proto <protocol> <hitcnts 1> <cap maskless>
```

Where,

<i>ethX</i>	: Chelsio interface.
<i>index</i>	: Filter index. For LE-TCAM filters, filter index should be 0-495 for T5 adapters and 0-559 for T6 adapters. For Hash/DDR filter, the index will be ignored and replaced by an automatically computed value, based on the hash (4-tuple). The index will be displayed after the filter rule is created successfully.
<i>action</i>	: Ingress packet disposition.
<i>pass</i>	: Ingress packets will be passed through set ingress queues.
<i>switch</i>	: Ingress packets will be routed to an output port with an optional header rewrite.
<i>drop</i>	: Ingress packets will be dropped.
<i>source_ip/port</i>	: Source IP/port of incoming packet.
<i>destination_ip/port</i>	: Destination IP/port of incoming packet.
<i>protocol</i>	: TCP by default. To change, specify the corresponding internet protocol number, e.g., use 17 for UDP.
<i>hitcnts 1</i>	: To enable hit counts in <i>cxgbtool</i> filter show output.
<i>cap maskless</i>	: This is mandatory for hash filter. If not provided, LE-TCAM filter will be created at the specified index.



*In case of Hash/DDR filters, **source\_ip**, **destination\_ip**, **source\_port** and **destination\_port** are mandatory, since the filters do not support masks and hence, 4-tuple must always be supplied. **Proto** is also a mandatory parameter.*

### 3.2.1. Choosing filterMode and filterMask

As mentioned earlier filterMask tuples can be subset of or equal to filterMode tuples. Following are examples of how you can select filterMode and filterMask and create a Hash filter based on those values:

- **When all tuples from filterMode are enabled in filterMask**

1. Select a filterMode from the supported filterMode table based on your requirement.

```
filterMode = fragmentation, mpshittype, protocol, vlan, port, fcoe
```

2. Select a filterMask so that it is a subset of or equal to filterMode based on application.

```
filterMask = fragmentation, mpshittype, protocol, vlan, port, fcoe
```

It is mandatory to create a filter based on all the above tuples mentioned in filterMask. Otherwise, filter rule will not honour.

3. Now, to create a hash filter based on the filterMode and filterMask values selected above:

```
[root@host~]# cxgbtool eth18 filter 100 action drop lip 120.10.10.100 fip 120.10.10.200 lport 5001 fport 51549 proto 6 frag 0 matchtype 0 ivlan 10 iport 0 fcoe 0 hitcnts 1 cap maskless  
Hash-Filter Index = 303760
```

- **When all tuples from filterMode are not enabled in filterMask**

In case you do not want to create filter rule based on any particular tuple from filterMode, do not select it in filterMask. For example, if you do not want to create a filter based on VLAN value, then do not select it from filterMode to filterMask.

1. Select a filterMode from the supported filterMode table based on your requirement.

```
filterMode = fragmentation, mpshittype, protocol, vlan, port, fcoe
```

2. Select a filterMask so that it is a subset of or equal to filterMode based on application without VLAN tuple.

```
filterMask = fragmentation, mpshittype, protocol, port, fcoe
```

Here, we have selected *fragmentation, mpshittype, protocol, port, fcoe* in filterMask so it is mandatory to create a filter based on only those tuples mentioned in filterMask. Otherwise, filter rule will not honour.

3. Now, to create a hash filter based on the filterMode and filterMask values selected above:

```
[root@indus sw]# cxgbtool eth18 filter 100 action drop lip 120.10.10.100 fip 120.10.10.200 lport 5001 fport 51549 proto 6 frag 0 matchtype 0 iport 0 fcoe 0 hitcnts 1 cap maskless  
Hash-Filter Index = 196568
```

### 3.2.2. Examples

- **drop action**

```
[root@host~]# cxgbtool ethX filter 496 action drop lip 102.1.1.1 fip
102.1.1.2 lport 12865 fport 20000 hitcnts 1 cap maskless iport 1 proto 17
Hash-Filter Index = 61722
```

The above filter rule will drop all UDP packets matching above 4 tuple coming on Chelsio port 1. Remaining packets will be sent to the host.

- **pass action**


```
[root@host~]# cxgbtool ethX filter 496 action pass lip 102.2.2.1 fip
102.2.2.2 lport 12865 fport 12000 hitcnts 1 cap maskless proto 6
Hash-Filter Index = 308184
```

The above filter rule will pass all TCP packets matching above 4 tuple. Remaining packets will be sent to the host.

- **switch action**

```
[root@host~]# cxgbtool ethX filter 496 action switch lip 102.3.3.1 fip
102.3.3.2 lport 5001 fport 16000 proto 6 iport 0 eport 1 hitcnts 1 cap
maskless
Hash-Filter Index = 489090
```

The above filter rule will switch all TCP packets matching above 4 tuple from Chelsio port 0 to Chelsio port 1. Remaining packets will be sent to the host.

 **Note** For more information on additional parameters, refer *cxgbtool* manual by running the `man cxgbtool` command.

## 3.3. Listing Filter Rules

- To list the Hash/DDR filters set, run the following command:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<bus-id>/hash_filters
```

- To list both LE-TCAM and Hash/DDR filters set, run the following command:

```
[root@host~]# cxgbtool ethX filter show
```

### 3.4. Removing Filter Rules

To remove a filter, run the following command with *cap maskless* parameter and corresponding filter rule index:

```
[root@host~]# cxgbtool ethX filter <index> <delete|clear> cap maskless
```

#### *i* Note

- *Filter rule index can be determined by referring the “hash\_filters” file located in /sys/kernel/debug/cxgb4/<bus-id>/.*
- *For more information on additional parameters, refer cxgbtool manual by running the `man cxgbtool` command.*

### 3.5. Filter Priority

By default, Hash/DDR filter has priority over LE-TCAM filter. To override this, the LE-TCAM filter should be created with *prio* option. For example:

```
[root@host~]# cxgbtool ethx filter <index> action <pass/drop/switch> prio 1
```

Where *index* is a positive integer set as filter id. 0-495 for T5 adapters and 0-63 for T6 adapters.

### 3.6. Swap MAC Feature

Chelsio's T6/T5 Swap MAC feature swaps packet source MAC and destination MAC addresses. This is applicable only for switch filter rules. The following is an example:

```
[root@host~]# cxgbtool eth2 filter 100 action switch lip 102.2.2.1 fip
102.2.2.2 lport 5001 fport 14000 hitcnts 1 iport 1 eport 0 swapmac 1 proto
17 cap maskless
Hash-Filter Index = 21936
```

The above example will swap source and destination MAC addresses of UDP packets (matching above 4 tuple) received on adapter port 1 and then switch them to port 0.

### 3.7. Traffic Mirroring

On T5/T6 adapters, when using *Hash Filter* configuration tuning options, Network driver (cxgb4) parameter *enable\_mirror* can be used to enable mirroring of traffic running on physical ports. The mirrored traffic will be received via Mirror PF/VF on Mirror Receive queues, which will then inject this traffic into network stack of Linux kernel.

### 3.7.1. Enabling Mirroring

To enable traffic mirroring, follow the steps mentioned below:

1. If not done already, install Unified Wire with *High Capacity Hash Filter* or *Unified Wire (Default)* configuration tuning option as mentioned in the [Unified Wire](#) chapter.
2. Enable `vnid_id` match for filterMode in Hash filter config file, `t5-config.txt`, located in `/lib/firmware/cxgb4/`

```
filterMode = fragmentation, mpshittype, protocol, vnid_id, port, fcoe
filterMask = port, protocol, vnid_id
```

3. Unload network driver (`cxgb4`) and reload it with mirroring enabled.

```
[root@host~]# rmmmod cxgb4
[root@host~]# modprobe cxgb4 enable_mirror=1 use_ddr_filters=1
```

4. The traffic will now be mirrored and received via mirror PF/VF corresponding to each port.

### 3.7.2. Switch Filter with Mirroring

The following example explains the method to switch and mirror traffic simultaneously:

1. Obtain the PF and VF values of the incoming port from `/sys/kernel/debug/cxgb4/<bus-id>/mps_tcam`
2. Create the desired switch filter rule.

```
[root@host~]# cxgbtool ethX filter 100 fip 102.8.8.2 lip 102.8.8.1 fport
20000 lport 12865 proto 6 pf 4 vf 64 action switch iport 0 eport 1 cap
maskless
```

The hash filter rule switches TCP traffic matching the above 4-tuple received on port 0 to port 1. The traffic will be switched and simultaneously received on mirror queues and network stack of host as mirroring is enabled.

### 3.7.3. Filtered Traffic Mirroring

Once mirroring is enabled, all the traffic received on a physical port will be duplicated. The following example explains the method to filter out the redundant traffic and receive only specific traffic on mirror queues:

1. Obtain the mirror PF and VF values from `dmesg`. You should see a similar output:

```
[165299.356887] cxgb4 0000:02:00.4: Port 0 Traffic Mirror PF = 4; VF = 66
[165299.358004] cxgb4 0000:02:00.4: Port 1 Traffic Mirror PF = 4; VF = 67
```

2. Create a DROP-ALL rule as below:

```
[root@host~]# cxgbtool ethX filter 255 pf 4 vf 66 action drop
```

Where, 255 is the last index of available TCAM filters. This will create a catch-all DROP filter for Mirror PF/VF of port 0. Similarly, create DROP filters for rest of Mirror PF/VF.

3. Create specific filter rules to allow specific traffic to be received on mirror queues as below:

```
[root@host~]# cxgbtool ethX filter 101 lip 102.8.8.1 fip 102.8.8.2 lport 12865 fport 20000 pf 4 vf 66 action pass
```

Now, the above specific traffic (from *102.8.8.2,20000* to *102.8.8.1,12865*) will be received in mirror receive queues and network stack of host.

## 3.8. Packet Tracing and Hit Counters

### 3.8.1. For T7/S7 Family of Adapters

- **S7 single-port adapter**

The following is a step-by-step guide to enable packet tracing on S7 single-port adapter:

1. Load the network driver with the following parameters:

```
[root@host~]# modprobe cxgb4 enable_traceq=1
```

2. Enable tracing on T7 adapter.

```
[root@host~]# cxgbtool -i ethX 0x9800=0x13
```

3. Determine the RspQ ID of the queues by looking at Trace QType in */sys/kernel/debug/cxgb4/<bus-id>/sge\_qinfo* file.

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<bus_id>/sge_qinfo | grep -i trace -A 5
```

Example:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/0000\:99\:00.4/sge_qinfo | grep -i trace -A 5
QType:                TRACE                TRACE                TRACE                TRACE
Interface:            ens5f4                ens5f4                ens5f4                ens5f4
RspQ ID:               53                    54                    55                    56
RspQ size:             1023                  1023                  1023                  1023
RspQE size:           64                    64                    64                    64
RspQ CIDX:             0                    0                    0                    0
```

 **Note** Use '53' from the above example as the RspID for the next step.

4. Set up a trace filter.

```
[root@host~]# echo "tx0 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace0
[root@host~]# echo "rx0 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace4
[root@host~]# echo "tx1 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace1
[root@host~]# echo "rx1 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace5
[root@host~]# echo "tx2 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace2
[root@host~]# echo "rx2 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace6
[root@host~]# echo "tx3 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace3
[root@host~]# echo "rx3 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace7
```

This step enables packet tracing for all ingress and egress traffic on port0 for capture at port0.

- **T7/S7 dual-port adapter**

The following is a step-by-step guide to enable packet tracing on T7/S7 Dual-port adapter:

1. Load the network driver with the following parameters:

```
[root@host~]# modprobe cxgb4 enable_traceq=1
```

2. Enable tracing on T7 adapter.

```
[root@host~]# cxgbtool -i ethX 0x9800=0x13
```


- Determine the RspQ ID of the queues by looking at Trace QType in `/sys/kernel/debug/cxgb4/<bus-id>/sge_qinfo` file.

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<bus_id>/sge_qinfo | grep -i trace -A 5
```

#### Example:

```
[root@host~]# cat /sys/kernel/debug/cxgb4/0000\:99\:00.4/sge_qinfo | grep -i trace -A 5
```

QType:	TRACE	TRACE	TRACE	TRACE
Interface:	ens5f4	ens5f4	ens5f4d1	ens5f4d1
RspQ ID:	55	56	57	58
RspQ size:	1023	1023	1023	1023
RspQE size:	64	64	64	64
RspQ CIDX:	0	0	0	0

 **Note** Use '53' from the above example as the RspID for the next step.

- Configure RSS Queue to send trace packets.

```
[root@host~]# cxgbtool -i ethX 0x0a434=<Trace Queue0-RspQ ID>
```

#### Example:

```
[root@host~]# cxgbtool -i ens5f4 0x0a434=53
```

- Set up a trace filter.

#### For port0-

```
[root@host~]# echo "tx0 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace0
[root@host~]# echo "rx0 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace4
[root@host~]# echo "tx1 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace1
[root@host~]# echo "rx1 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace5
```

#### For port1 –

```
[root@host~]# echo "tx2 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace2
[root@host~]# echo "rx2 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace6
[root@host~]# echo "tx3 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace3
[root@host~]# echo "rx3 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace7
```

This step enables packet tracing for all ingress and egress traffic on port0 and port1 for capture at port0.

- **T7/S7 quad-port adapter**

The following is a step-by-step guide to enable packet tracing on T7/S7 Dual-port adapter:

1. Load the network driver with the following parameters:

```
[root@host~]# modprobe cxgb4 enable_traceq=1
```

2. Enable tracing on T7 adapter.

```
[root@host~]# cxgbtool -i ethX 0x9800=0x13
```

3. Determine the RspQ ID of the queues by looking at Trace QType in `/sys/kernel/debug/cxgb4/<bus-id>/sge_qinfo` file.

```
[root@host~]# cat /sys/kernel/debug/cxgb4/<bus_id>/sge_qinfo | grep -i trace -A 5
```

**Example:**

```
[root@host~]# cat /sys/kernel/debug/cxgb4/0000\:99\:00.4/sge_qinfo | less | grep -i trace -A 5
```

QType:	TRACE	TRACE	TRACE	TRACE
Interface:	ens5f4	ens5f4d1	ens5f4d2	ens5f4d3
RspQ ID:	53	54	55	56
RspQ size:	1023	1023	1023	1023
RspQE size:	64	64	64	64
RspQ CIDX:	0	0	0	0

 **Note** Use '53' from the above example as the RspID for the next step. .

4. Configure RSS Queue to send trace packets.

```
[root@host~]# cxgbtool -i ethX 0x0a434=<Trace Queue0-RspQ ID>
```

### Example:

```
[root@host~]# cxgbtool -i ens5f4 0x0a434=53
```

### 5. Set up a trace filter.

#### For port0-

```
[root@host~]# echo "tx0 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace0  
[root@host~]# echo "rx0 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace4
```

#### For port1 –

```
[root@host~]# echo "tx1 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace1  
[root@host~]# echo "rx1 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace5
```

#### For port2-

```
[root@host~]# echo "tx2 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace2  
[root@host~]# echo "rx2 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace6
```

#### For port3 –

```
[root@host~]# echo "tx3 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace3  
[root@host~]# echo "rx3 snaplen=2048" > /sys/kernel/debug/cxgb4/<bus_id>/trace7
```

This step enables packet tracing for all ingress and egress traffic on port0, port1, port2 and port3 for capture at port0.

### 3.8.2. For T5/T6 Family of Adapters

For T5/T6 LE-TCAM and T6 Hash/DDR filters, *hit counters* will work simply by adding *hitcnts 1* parameter to the filter rule. However, for T5 Hash/DDR filters, you will have to make use of tracing feature and RSS queues. The following is a step-by-step guide to enable packet tracing and *hit counters* for T5 Hash/DDR filter rules:

#### 1. Load the network driver with the following parameters:

```
[root@host~]# modprobe cxgb4 use_ddr_filters=1 enable_traceq=1
```

2. Configure the required filter rules.
3. Enable tracing on T5 adapter.

```
[root@host~]# cxgbtool ethX reg 0x09800=0x13
```

#### 4. Set up a trace filter.

```
[root@host~]# echo tx1 snaplen=40 > /sys/kernel/debug/cxgb4/<bus_id>/trace0
```

Here, *snaplen* is the length in bytes to be captured.

 **Note** Use “*snaplen=60*” in case of IPV6.

The above step will trace all the packets transmitting from port1(tx1) to trace filter 0.

#### 5. Configure RSS Queue to send trace packets. Determine the RspQ ID of the queues by looking at *Trace QType* in */sys/kernel/debug/cxgb4/<bus-id>/sge\_qinfo* file.

```
[root@host~]# cxgbtool ethX reg 0x0a00c=<Trace Queue0-RspQ ID>
```

Now the traced packets can be seen in tcpdump, and the hit counters will also increment.

- **Multi-tracing**

To enable packet capture or *hit counters* for multiple chelsio ports in Tx/Rx direction enable Multi-tracing. Using this we can configure 4 different RSS Queues separately corresponding to 4 trace-filters.

#### 1. Enable Tracing as well as MultiRSSFilter.

```
[root@host~]# cxgbtool ethX reg 0x09800=0x33
```

#### 2. Setup a trace filter.

```
[root@host~]# echo tx0 snaplen=40 > /sys/kernel/debug/cxgb4/<bus_id>/trace0
```

#### 3. Configure the RSS Queue corresponding to trace0 filter configured above. Determine the *RspQ ID* of the queues by looking at *Trace QType* in */sys/kernel/debug/cxgb4/<bus-id>/sge\_qinfo* file.

```
[root@host~]# cxgbtool ethX reg 0x09808=<Trace-Queue0-RspQ ID>
```

4. Similarly for other direction and for multiple ports run the follow commands:

```
[root@host~]# echo rx0 snaplen=40 > /sys/kernel/debug/cxgb4/<bus_id>/trace1
[root@host~]# echo tx1 snaplen=40 > /sys/kernel/debug/cxgb4/<bus_id>/trace2
[root@host~]# echo rx1 snaplen=40 > /sys/kernel/debug/cxgb4/<bus_id>/trace3
[root@host~]# cxgbtool ethX reg 0x09ff4=<Trace-Queue1-RspQ ID>
[root@host~]# cxgbtool ethX reg 0x09ffc=<Trace-Queue2-RspQ ID>
[root@host~]# cxgbtool ethX reg 0x0a004=<Trace-Queue3-RspQ ID>
```

 **Note** Use “snaplen=60” in case of IPV6.

## 4. NAT Filtering

T5/T6 adapters support offloading of stateless/static NAT functionality, that is translating source/destination L3 IP addresses, and source/destination L4 port numbers. This feature is supported with both LE-TCAM and Hash filters.

**Note** *This feature is only supported with filter action switch.*

Syntax:

```
[root@host~]# cxgbtool ethX filter <index> action switch fip <source_ip> lip
<destination_ip> fport <source_port> lport <destination_port> nat <mode>
nat_fip <new_source_ip> nat_lip <new_destination_ip> nat_fport
<new_source_port> nat_lport <new_destination_port>
```

Where,

<i>ethX</i>	: Chelsio interface.
<i>source_ip/port</i>	: Source IP/port of incoming packet.
<i>destination_ip/port</i>	: Destination IP/port of incoming packet.
<i>new_source_ip/port</i>	: Source IP/port to be translated to.
<i>new_destination_ip/port</i>	: Destination IP/port to be translated to.
<i>Mode</i>	: Combination of IP/port to be translated. <i>all</i> will translate all 4-tuple fields. To see other modes, refer cxgbtool manual page.

Examples:

- Hash filter to translate all four tuples, viz. source IP, destination IP, source port and destination port to new values.

```
[root@ ~]# cxgbtool eth0 filter 101 action switch iptort 0 eport 1 fip 102.10.10.100 lip 102.10.10.200 fport 50000 lport 60000 proto 17 nat all nat_fip 192.168.10.100 nat_lip 192.168.10.200 nat_fport 60000 nat_lport 61000 hitcnts 1 cap maskless
Hash-Filter Index = 232776
```

- Hash filter to translate source IP and source port to new values.

```
[root@ ~]# cxgbtool eth0 filter 101 action switch iptort 0 eport 1 fip 102.10.10.100 lip 102.10.10.200 fport 50000 lport 60000 proto 17 nat sip-sp nat_fip 192.168.10.100 nat_fport 61000 hitcnts 1 cap maskless
Hash-Filter Index = 232776
```

- LE-TCAM filter to translate destination IP and destination port to new values.


```
[root@ ~]# cxgbtool eth0 filter 101 action switch iptort 0 eport 1 lip 102.10.10.200 lport 60000 nat dip-dip nat_lip 192.168.10.200 nat_lport 61000 hitcnts 1
```

## XXXI. Mesh Topology

---

## 1. Introduction

Chelsio's fifth/sixth generation (T5/T6), high-performance 10/25/40/50/100GbE adapters enable incremental, non-disruptive server installs, and support the ability to work without requiring any discrete external network switch, delivering a brownfield strategy to enable high performance, low cost, scalable deployments. Major benefits include cost savings on switches at higher speeds with each deployment. Mesh topology involves connecting each node to every other node.

 **Note** *This is supported only on T6/T5 family of adapters.*

### 1.1. Hardware Requirements

---

#### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T6225-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR

### 1.2. Software Requirements

---


Currently, the Mesh topology is available for the following Linux kernel version(s):

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other versions have not been tested and are not guaranteed to work.

### 1.3. Mesh topology

Each node should be connected to other node. Supported configs using this approach: N ports per node, N+1 node cluster. Below is a 5-node Mesh using 4-port Chelsio adapters. NIC ports on each server connected to each other (1<->2, 1<->3, 1<->4, 1<->5, 2<->3, 2<->4, 2<->5, 3<->4, 3<->5, 4<->5).

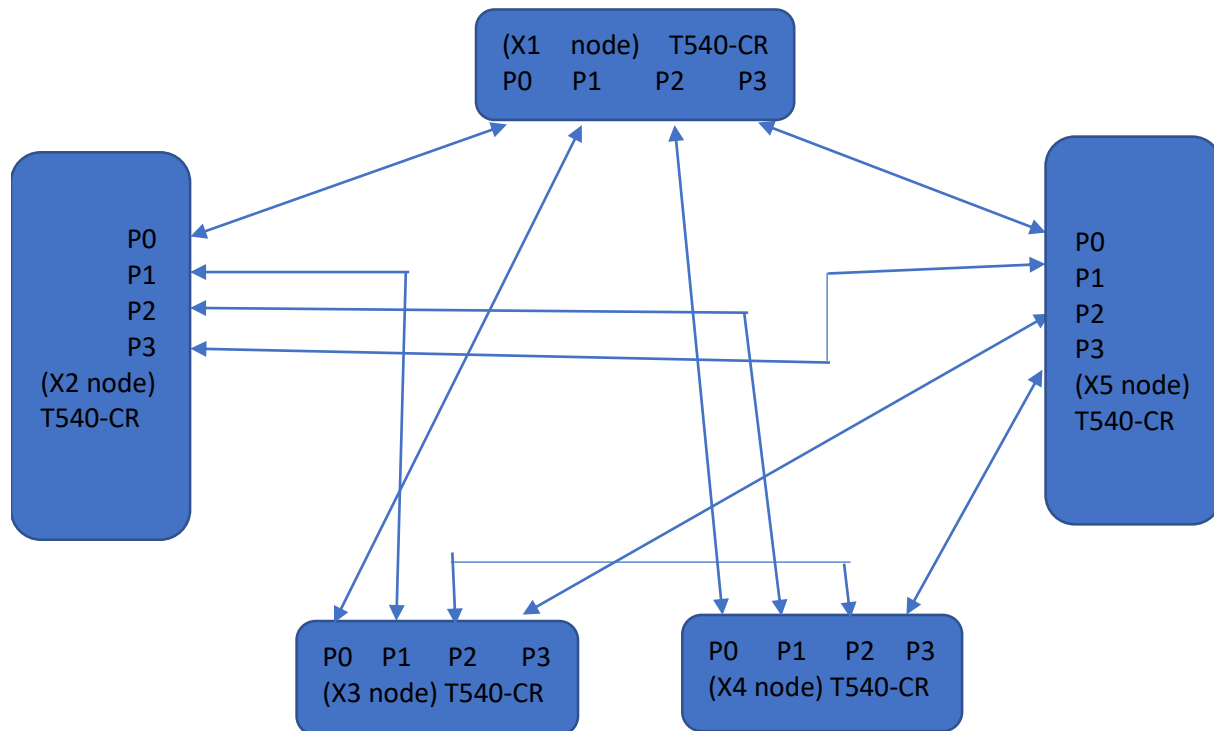

## 2. Software/Driver Installation


Install Unified Wire on all the machines in the mesh topology.

1. Change your current working directory to the Chelsio Unified Wire package directory.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
```

2. Install the drivers, tools, and libraries.

```
[root@host~]# make install
```

 **Note** For more installation options, run `make help` or `install.py -h`.

3. Reboot your machine for changes to take effect.

```
[root@host~]# reboot
```

### 3. Software/Driver Configuration and Fine-tuning

Configure all the machines in the mesh topology using the below steps:

**Important** *Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4
libcxgbi libcxgb
```

1. Load network driver (*cxgb4*).


```
[root@host~]# modprobe cxgb4
```

2. Configure interfaces with required IPs and networking as mentioned in <https://access.redhat.com/solutions/30564> article.

You should be able to run traffic between the nodes. To run different protocol traffic, refer to their respective sections for protocol configuration.

*Example:*

Three nodes are connected to each other in mesh topology with the following IP addresses.

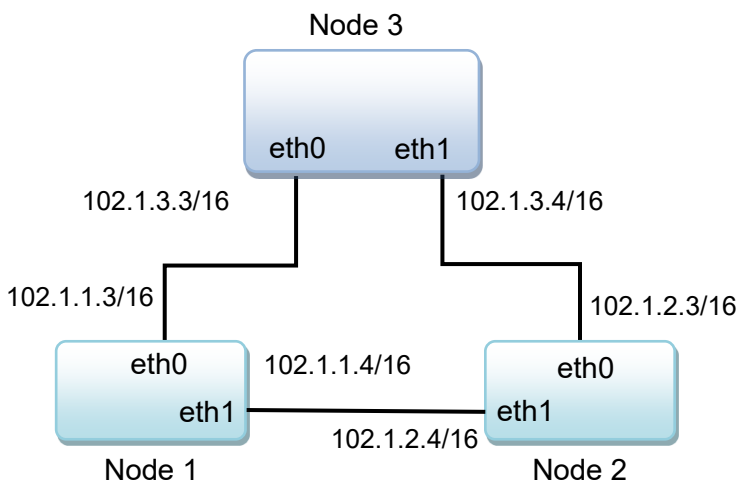

If node3 wants to communicate to node1,

```
[root@host~]# ping -I 102.1.3.3 102.1.1.3
```

If node3 wants to communicate to node2,

```
[root@host~]# ping -I 102.1.3.4 102.1.2.3
```

## XXXII. Traffic Management

---

# 1. Introduction

Traffic Management capabilities built-in to Chelsio adapters can shape transmit data traffic through the use of sophisticated queuing and scheduling algorithms built-in to the ASIC hardware which provides fine-grained software control over latency and bandwidth parameters such as packet rate and byte rate. These features can be used in a variety of data center application environments to solve traffic management problems.

Traffic Management features in the Chelsio's adapters allow the user to control three main things:

- Guarantee low latency in the presence of other traffic
- Control max bandwidth that a connection or a flow (a group of connections) can use
- Allocate available bandwidth to several connection or flows based on desired levels of performance

Once the offload transmit traffic shaping classes have been configured, individual offloaded connections (flows) may be assigned to a traffic shaping class to manage the flows as per the class configuration. The mechanism to accomplish this "flow to class" mapping assignment is the Connection Offload Policy (COP) configuration system.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

The following are the supported Chelsio adapters:

- T7 adapters:
  - T72200-FH
  - T72200
  - T7450
  - S72200\*
  - S71400\*
  - S7450 \*
- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T62100-SO-CR\*
  - T62100-SO-OCP3\*
  - T6225-CR
  - T6225-SO-CR\*

- T5 adapters:
  - T540-LP-CR
  - T520-CR
  - T520-SO-CR\*

\* Only Non-offloaded connections are supported.

## 1.2. Software Requirements

---

### 1.2.1. Linux Requirements

Currently, the Traffic Management feature is available for the following kernel versions:

- Kernel.org linux-6.12.91
- Kernel.org linux-6.18.33
- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64
- Ubuntu 24.04.4, 6.8.0-110-generic

Other kernel versions have not been tested and are not guaranteed to work.

## 2. Software/Driver Loading



**Important**

*Ensure that all inbox drivers are unloaded before proceeding with unified wire drivers.*

```
[root@host~]# rmmod csiostor cxgb4i cxgbit iw_cxgb4 chcr cxgb4vf cxgb4  
libcxgbi libcxgb
```

Traffic Management can be performed on non-offloaded connections as well as on offloaded connections.

The drivers must be loaded by the root user. Any attempt to load the drivers as a regular user will fail.

Run the following commands to load the TOE driver:

```
[root@host~]# modprobe cxgb4  
[root@host~]# modprobe t4_tom
```

## 3. Software/Driver Configuration and Fine-tuning

### 3.1. Traffic Management Rules

Traffic Management supports the following types of scheduler hierarchy levels which can be configured using the `cxgbtool` utility:

- i. Class Rate Limiting
- ii. Class Weighted Round Robin
- iii. Channel Rate Limiting

#### 3.1.1. Class Rate Limiting

This scheduler hierarchy level can be used to rate limit individual traffic classes or individual connections (flow) in a traffic class. Configure it using the below command.

```
[root@host~]# cxgbtool <ethX> sched-class params type packet level cl-rl
mode <scheduler-mode> rate-unit <scheduler-rate-unit> rate-mode <scheduler-
rate-mode> channel <Channel No.> class <scheduler-class-index> max-rate
<maximum-rate> pkt-size <Packet size>
```

Here,

<i>ethX</i>	:	Chelsio interface
<i>scheduler-mode</i>	:	specifies whether the rule is configured for individual traffic classes or individual connections (flow) in a traffic class. Possible values include <i>flow</i> or <i>class</i> .
<i>scheduler-rate-unit</i>	:	Specifies whether the rule is configured for bit-rate or packet rate. Possible values include <i>bits</i> or <i>pkts</i> .
<i>scheduler-rate-mode</i>	:	Specifies whether the rule is configured to support a percent of the channel rate or an effective rate. Possible values include <i>relative</i> or <i>absolute</i> .
<i>Channel No.</i>	:	Port on which data is flowing (0-3).
<i>scheduler-class-index</i>	:	TCP traffic class index; 0-14 for T4/T5 and 0-30 for T6 adapters.
<i>maximum-rate</i>	:	Bit rate (Kbps) for this TCP stream. The lower limit is 10 Kbps.
<i>Packet size</i>	:	TCP mss size in bytes; for example - for an MTU of 1500, use a packet size of 1460.

#### 3.1.2. Class Weighted Round Robin

Incoming traffic flows from various applications can be prioritized and provisioned using a weighted round-robin scheduling algorithm. Configure it using the below command.

```
[root@host~]# cxgbtool <ethX> sched-class params type packet level cl-wrr
channel <Channel No.> class <scheduler-class-index> weight <Y>
```

Here,

*ethX* : Chelsio interface.  
*Channel No.* : Port on which data is flowing (0-3).  
*scheduler-class-index* : TCP traffic class index; 0-14 for T4/T5 and 0-30 for T6 adapters.  
*weight* : Weight to be used for a weighted-round-robin scheduling hierarchy. Possible values include 1 to 99.

### 3.1.3. Channel Rate Limiting

This scheduler hierarchy level can be used to rate limit individual channels. Atleast one class should be specified while configuring Channel Rate Limiting using the below command.

```
[root@host~]# cxgbtool <ethX> sched-class params type packet level ch-rl
rate-unit <scheduler-rate-unit> rate-mode <scheduler-rate-mode> channel
<Channel No.> class <scheduler-class-index> max-rate <maximum-rate>
```

Here,

*ethX* : Chelsio interface.  
*scheduler-rate-unit* : Specifies whether the traffic management rule is configured for bit-rate or packet-rate. Possible values include *bits* or *pkts*.  
*scheduler-rate-mode* : Specifies whether the traffic management rule is configured to support a percent of the channel rate or an effective rate. Possible values include *relative* or *absolute*.  
*Channel No.* : Port on which data is flowing (0-3).  
*scheduler-class-index* : TCP traffic class index; 0-14 for T4/T5 and 0-30 for T6 adapters.  
*maximum-rate* : Bit rate (Kbps) for this TCP stream. The lower limit is 1 Gbps.

### 3.1.4. Listing TM parameters

To view the parameters of a class or a channel,

```
[root@host~]# cxgbtool <ethX> sched-class show channel <Channel No.> class
<scheduler-class-index>
```

*Channel No.* : Port on which data is flowing (0-3).  
*scheduler-class-index* : TCP traffic class index; 0-14 for T4/T5 adapters and 0-30 for T6 adapters.

## 3.2. Configuring Traffic Management

### 3.2.1. For Non-offloaded connections

Traffic Management of non-offloaded connections is a two step process. In the first step bind connections to the indicated NIC TX queue using `tc` utility from `iproute2-3.9.0` package. In the second step bind the indicated NIC TX queue to the specified TCP Scheduler class using the `cxgbtool` utility.

1. Load the network driver and bring up the interface.

```
[root@host~]# modprobe cxgb4
[root@host~]# ifconfig ethX up
```

2. Bind connections to queues.

```
[root@host~]# tc qdisc add dev ethX root handle 1: multiq
[root@host~]# tc filter add dev ethX parent 1: protocol all prio 1 u32 match
ip dst <IP address of destination> action skbedit queue_mapping <queue>
```

**Note** For additional binding options, run `[root@host~]# man tc`

3. Now, bind the NIC TX queue with traffic class.

```
[root@host~]# cxgbtool ethX sched-queue <queue> <class>
```

Here,

`ethX` : Chelsio interface  
`queue` : NIC TX queue  
`class` : Class index; 0-14 for T4/T5 adapters and 0-30 for T6 adapters.

**Note** If the TX queue is all, \* or any negative value, the binding will apply to all of the TX queues associated with the interface. If the class is unbind, clear or any negative value, the TX queue(s) will be unbound from any current TX Scheduler Class binding.

**Important** Flow mode is not supported for non-offloaded connections.

### 3.2.2. For Offloaded connections

Traffic Management of offloaded connections can be configured either by applying *COP* policies that associate offloaded connections to classes or by modifying the application.

Both the methods have been described below:

- **Applying *COP* policy**

1. Load the TOE driver and bring up the interface.

```
[root@host~]# modprobe t4_tom
[root@host~]# ifconfig ethX up
```

2. Create a new policy file (say *new\_policy\_file*) and add the following line to associate connections with the given scheduling class. Class can have values ranging from 0-14 for T4/T5 adapters and 0-30 for T6 adapters.

*Example:*

*src host 102.1.1.1 => offload class 0*

The above example will associate all connections originating from IP address 102.1.1.1 with scheduling class 0.

**Note** *If no specified rule matches a connection, a default setting will be used which disables offload for that connection. That is, there will always be a final implicit rule following all the rules in the input rule set of:*

*all => !offload*

3. Compile the policy file using *COP*.

```
[root@host~]# cop -d -o <output_policy_file> <new_policy_file>
```

4. Apply the *COP* policy.

```
[root@host~]# cxgbtool ethX policy <output_policy_file>
```

**Note** *The policy applied using *cxgbtool* is not persistent and should be applied every time drivers are reloaded, or the machine is rebooted.*

The applied cop policies can be read using,

```
[root@host~]# cat /proc/net/offload/toeX/read-cop
```

- **Modifying the application**

The application can also be modified to associate connections to scheduling classes. Follow the steps mentioned below:

1. Determine the TCP socket file descriptor in the application through which data is sent.
2. Declare and initialize a variable in the application.

```
int cl=1;
```

Here,

*cl* is the TCP traffic class (scheduler-class-index) that the user wishes to assign the data stream to. This value needs to be in the range of 0-14 for T4/T5 adapters and 0-30 for T6 adapters.

The application will function as per the parameters set for that traffic class.

3. Add socket option definitions.

In order to use *setsockopt()* to set the options to the TCP socket, the following two definitions need to be made:

- SOL\_SCHEDCLASS used for setting TCP traffic class, which has the value 290.
- IPPROTO\_TCP used for setting the type of IP Protocol.

```
# define SOL_SCHEDCLASS 290
# define IPPROTO_TCP 6
```

4. Use the *setsockopt()* function to set socket options.

The *setsockopt()* call must be mentioned after the *connect()* call.

```
//Get the TCP socket descriptor variable
setsockopt (sockfd , IPPROTO_TCP, SOL_SCHEDCLASS, &cl, sizeof(cl));
```

Here,

*sockfd* : The file descriptor of the TCP socket.  
*&cl* : Pointer to the class variables.  
*sizeof(cl)* : The size of the variable.

5. Now, compile the application.

## 4. Usage

### 4.1. Non-Offloaded Connections

The following example demonstrates the method to rate limit all TCP connections on class 0 to a rate of 300 Mbps for Non-offload connections:

1. Load the network driver and bring up the interface.

```
[root@host~]# modprobe cxgb4
[root@host~]# ifconfig eth0 up
```

2. Bind connections with destination IP address 192.168.5.3 to NIC TX queue 3.

```
[root@host~]# tc qdisc add dev eth0 root handle 1: multiq
[root@host~]# tc filter add dev eth0 parent 1: protocol all prio 1 u32 match
ip dst 192.168.5.3 action skbedit queue_mapping 3
```

3. Bind the NIC TX queue to class 0.

```
[root@host~]# cxgbtool eth0 sched-queue 3 0
```

4. Set the appropriate rule for class 0.

```
[root@host~]# cxgbtool eth0 sched-class params type packet level cl-rl
mode class rate-unit bits rate-mode absolute channel 0 class 0 max-rate
300000 pkt-size 1460
```

**!** **Important** *Flow mode is not supported for non-offloaded connections.*

### 4.2. Offloaded Connections

The following example demonstrates the method to rate limit all TCP connections on class 0 to a rate of 300 Mbps for offloaded connections:

1. Load the TOE driver and bring up the interface.

```
[root@host~]# modprobe t4_tom
[root@host~]# ifconfig eth0 up
```

2. Create a new policy file (say *new\_policy\_file*) and add the following line to associate connections with the given scheduling class.

```
src host 102.1.1.1 => offload class 0
```

3. Compile the policy file using *COP*.

```
[root@host~]# cop -d -o <output_policy_file> <new_policy_file>
```

4. Apply the *COP* policy.

```
[root@host~]# cxgbtool eth0 policy <output_policy_file>
```

**Note** *The policy applied using cxgbtool is not persistent and should be applied every time drivers are reloaded, or the machine is rebooted.*

The applied cop policies can be read using,

```
[root@host~]# cat /proc/net/offload/toeX/read-cop
```

5. Set the appropriate rule for class 0.

```
[root@host~]# cxgbtool ethX sched-class params type packet level cl-r1 mode
class rate-unit bits rate-mode absolute channel 0 class 0 max-rate 300000
pkt-size 1460
```

## 4.3. Offloaded Connections with Modified Application

The following example demonstrates the method to rate limit all TCP connections on class 0 to a rate of 300 Mbps for offloaded connections with the modified application.

1. Load the TOE driver and bring up the interface.

```
[root@host~]# modprobe t4_tom
[root@host~]# ifconfig eth0 up
```

2. Modify the application as mentioned in the [Configuring Traffic Management](#) section.

3. Set the appropriate rule for class 0.

```
[root@host~]# cxgbtool ethX sched-class params type packet level cl-r1 mode
class rate-unit bits rate-mode absolute channel 0 class 0 max-rate 300000
pkt-size 1460
```

## 4.4. Inline TLS Offload Connections

Refer to [Inline TLS Offload](#) chapter for the configuration steps. To rate limit Inline TLS Offload connections, follow the steps mentioned below:

1. Load the TOE driver and bring up the interface.

```
[root@host~]# modprobe t4_tom
[root@host~]# ifconfig eth0 up
```

2. Create a new policy file and add the following line for TCP port (to be TLS offloaded), 443 in this case. Bind the connections to class 0.

```
src or dst port 443 => offload tls mss 32 bind random class 0
all => offload
```


The `all => offload` is added to ensure that rest of the TCP ports will be regular TOE offloaded.

3. Compile the policy file using `COP`.

```
[root@host~]# cop -d -o <output_policy_file> <new_policy_file>
```

4. Apply the `COP` policy.

```
[root@host~]# cxgbtool ethX policy <output_policy_file>
```

 **Note** *The policy applied using `cxgbtool` is not persistent and should be applied every time drivers are reloaded, or the machine is rebooted.*

The applied cop policies can be read using,

```
[root@host~]# cat /proc/net/offload/toeX/read-cop
```

5. Set the appropriate rule for class 0 with the required rate and burst size 16384.

```
[root@host~]# cxgbtool ethX sched-class params type packet level cl-rl mode
flow rate-unit bits rate-mode absolute channel 0 class 0 max-rate 5000 pkt-
size 1460 burst-size 16384
```

This rule will rate limit all Inline TLS connections on class 0 to 5 Mbps per connection.

## 5. Software/Driver Unloading

Reboot the system to unload the driver. To unload without rebooting, refer [Unloading the TOE driver](#) section of **Network (NIC/TOE)** chapter.

## XXXIII. Unified Boot

---

# 1. Introduction

PXE is short for Preboot execution Environment and is used for booting computers over an Ethernet network using a Network Interface Card (NIC/TOE).

This section of the guide explains how to configure and use Chelsio Unified Boot Option ROM which flashes PXE Option ROM onto Chelsio's T7 adapters. It adds functionalities like PXE boot.

## 1.1. Hardware Requirements

---

### 1.1.1. Supported Adapters

Following are the currently shipping T7 Chelsio adapters that are compatible with Chelsio Unified Boot software:

- T7 adapter:
  - T72200-FH
  - T72200
  - T7450
  - S71400
  - S72200
  - S7450

Following are the currently shipping T6/T5 Chelsio adapters that are compatible with Chelsio Unified Boot software:

- T6 adapters:
  - T62100-CR
  - T62100-LP-CR
  - T62100-SO-CR
  - T62100-SO-OCP3
  - T6225-CR
  - T6225-SO-CR
- T5 adapters:
  - T540-LP-CR
  - T520-CR
  - T520-SO-CR

### 1.1.2. Supported platforms for T6/T5

Following is the list of hardware platforms supported by Chelsio Unified Boot software:

- DELL PowerEdge R610
- DELL PowerEdge R720
- IBM X3650 M4\*
- Lenovo X3650 M5
- Lenovo ThinkSystem SR650
- HP ProLiant DL180 gen9
- HP ProLiant DL385G2
- Supermicro X10DRi
- Supermicro X11SSL-CF
- ASUS z390
- QuantaGrid D51B-1U
- AMD EPYC 7551

\* If system BIOS version is lower than 1.5 and both Legacy and uEFI are enabled, system will hang during POST. Upgrade the BIOS version to 1.5 or higher to avoid this issue.

### 1.1.3. Supported Switches for T6/T5

The following is the list of network switches supported by Chelsio Unified Boot software:

- Cisco Nexus 5010 with 5.1(3) N1 (1a) firmware.
- Arista DCS-7124S-F
- Mellanox SX\_PPC\_M460EX

Other platforms/switches have not been tested and are not guaranteed to work.

## 1.2. Software Requirements

---

The installation of the following Linux distributions is supported

- RHEL/Rocky/AlmaLinux 10.1, 6.12.0-124.8.1.el10\_1.x86\_64
- RHEL/Rocky/AlmaLinux 10.0, 6.12.0-55.9.1.el10\_0.x86\_64
- RHEL/Rocky/AlmaLinux 9.7, 5.14.0-611.5.1.el9\_7.x86\_64
- RHEL/Rocky/AlmaLinux 9.6, 5.14.0-570.12.1.el9\_6.x86\_64

Other kernel versions have not been tested and are not guaranteed to work.

## 1.3. Pre-requisites

---

- A USB flash drive is required for updating firmware, option ROM, etc.

## 2. Secure Boot

**Secure Boot**, a high-performance computing software solution is a method to restrict which binaries can be executed to boot the system. With Secure Boot, the system BIOS will only allow the execution of boot loaders that carry the cryptographic signature of trusted entities. In other words, anything run in the BIOS must be **signed** with a key that the system knows is trustworthy. With each reboot of the server, every executed component is verified.

The Chelsio Drivers are in-boxed in major Linux Distributions mentioned in the [Software Requirements](#) and can be used for OS installation after enabling Secure Boot in System BIOS.


## 3. Chelsio T7 Adapter

### 3.1. Flashing firmware, option ROM and boot.cfg

Chelsio Unified Boot provides utility to flash firmware, optionROM and boot config onto Chelsio T7 adapters.

#### 3.1.1. uEFI

- i. Reboot the system and go into BIOS setup.
- ii. Disable Secure Boot.
- iii. Configure the system having Chelsio CNA to boot in uEFI mode.

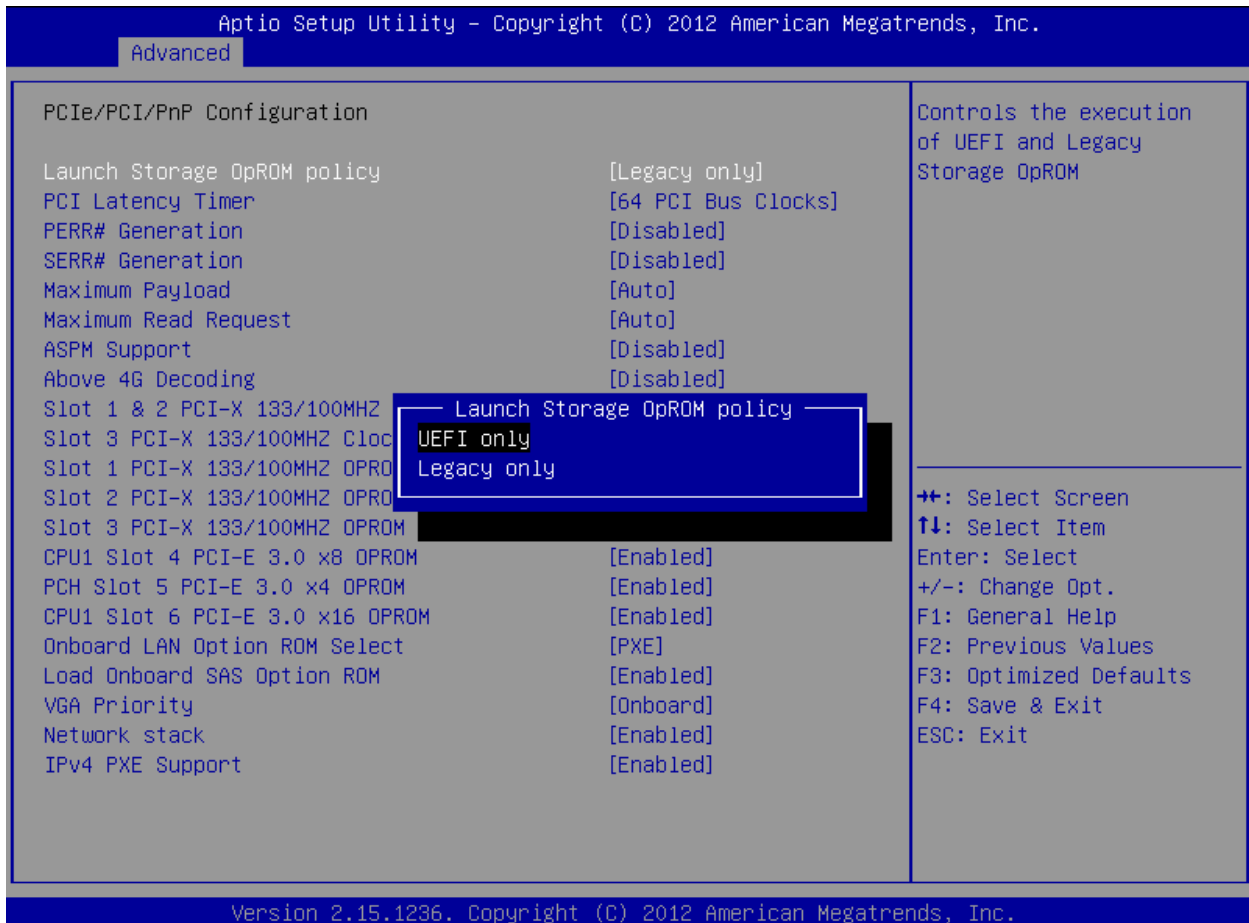

**Note** For Supermicro systems, enable **Network Stack** as well before proceeding.

- iv. Boot to **EFI Shell**.

```

UEFI Interactive Shell v2.2
EDK II
UEFI v2.90 (American Megatrends, 0x00050020)
Mapping table
  FS0: Alias(s):HD0c0b:;BLK1:
      PciRoot(0x0)/Pci(0x14,0x0)/USB(0x2,0x0)/HD(1,MBR,0x1288D8F8,0x800,0x1D35600)
  FS1: Alias(s):HD1f65535a1:;BLK3:
      PciRoot(0x0)/Pci(0x17,0x0)/Sata(0x5,0xFFFF,0x0)/HD(1,GPT,61DA6F6C-C758-4D05-A1C0-1402B7EA1
C57,0x800,0x12C000)
  BLK0: Alias(s):
      PciRoot(0x0)/Pci(0x14,0x0)/USB(0x2,0x0)
  BLK2: Alias(s):
      PciRoot(0x0)/Pci(0x17,0x0)/Sata(0x5,0xFFFF,0x0)
  BLK4: Alias(s):
      PciRoot(0x0)/Pci(0x17,0x0)/Sata(0x5,0xFFFF,0x0)/HD(2,GPT,94E7F22E-E0FA-4E10-85A7-74E806D75
DBB,0x12C800,0x200000)
  BLK5: Alias(s):
      PciRoot(0x0)/Pci(0x17,0x0)/Sata(0x5,0xFFFF,0x0)/HD(3,GPT,728A8E0F-7FBA-489B-A5C3-807CFF67B
1FC,0x32C800,0x1BBF7800)
Press ESC in 5 seconds to skip startup.nsh or any other key to continue.
Shell> fs0:
FS0:\> _

```

v. Enter into pendrive which is **fs0** in this case.

```

UEFI Interactive Shell v2.2
EDK II
UEFI v2.90 (American Megatrends, 0x00050020)
Mapping table
  FS0: Alias(s):HD0c0b:;BLK1:
      PciRoot(0x0)/Pci(0x14,0x0)/USB(0x2,0x0)/HD(1,MBR,0x1288D8F8,0x800,0x1D35600)
  FS1: Alias(s):HD1f65535a1:;BLK3:
      PciRoot(0x0)/Pci(0x17,0x0)/Sata(0x5,0xFFFF,0x0)/HD(1,GPT,61DA6F6C-C758-4D05-A1C0-1402B7EA1
C57,0x800,0x12C000)
  BLK0: Alias(s):
      PciRoot(0x0)/Pci(0x14,0x0)/USB(0x2,0x0)
  BLK2: Alias(s):
      PciRoot(0x0)/Pci(0x17,0x0)/Sata(0x5,0xFFFF,0x0)
  BLK4: Alias(s):
      PciRoot(0x0)/Pci(0x17,0x0)/Sata(0x5,0xFFFF,0x0)/HD(2,GPT,94E7F22E-E0FA-4E10-85A7-74E806D75
DBB,0x12C800,0x200000)
  BLK5: Alias(s):
      PciRoot(0x0)/Pci(0x17,0x0)/Sata(0x5,0xFFFF,0x0)/HD(3,GPT,728A8E0F-7FBA-489B-A5C3-807CFF67B
1FC,0x32C800,0x1BBF7800)
Press ESC in 5 seconds to skip startup.nsh or any other key to continue.
Shell> fs0:
FS0:\> _

```

- vi. Navigate to the folder where **OptionROM** is copied.

```

UEFI Interactive Shell v2.2
EDK II
UEFI v2.90 (American Megatrends, 0x00050020)
Mapping table
  FS0: Alias(s):HD0s0b;;BLK1:
        PciRoot(0x0)/Pci(0x14,0x0)/USB(0x12,0x0)/HD(1,MBR,0x1288D8F8,0x800,0x1D35600)
  FS1: Alias(s):HD1b65535a1;;BLK3:
        PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(1,GPT,E1FD35D8-185A-4A43-BC2B-23656AC92
29F,0x800,0x12C000)
  BLK0: Alias(s):
        PciRoot(0x0)/Pci(0x14,0x0)/USB(0x12,0x0)
  BLK2: Alias(s):
        PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)
  BLK4: Alias(s):
        PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(2,GPT,01425A6F-B1D4-4CFE-95DB-B72AE60DC
726,0x12C800,0x200000)
  BLK5: Alias(s):
        PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(3,GPT,63168DC9-AA71-4FFA-A7CD-01F24A985
BC6,0x32C800,0x7414000)
Press ESC in 1 seconds to skip startup.nsh or any other key to continue.
Shell>
Shell>
Shell> fs0:
FS0:\> cd 3003
FS0:\3003> _

```

- vii. Load the **ChelsioUD.efi** driver.

```

UEFI Interactive Shell v2.2
EDK II
UEFI v2.90 (American Megatrends, 0x00050020)
Mapping table
  FS0: Alias(s):HD0s0b;;BLK1:
        PciRoot(0x0)/Pci(0x14,0x0)/USB(0x12,0x0)/HD(1,MBR,0x1288D8F8,0x800,0x1D35600)
  FS1: Alias(s):HD1b65535a1;;BLK3:
        PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(1,GPT,E1FD35D8-185A-4A43-BC2B-23656AC92
29F,0x800,0x12C000)
  BLK0: Alias(s):
        PciRoot(0x0)/Pci(0x14,0x0)/USB(0x12,0x0)
  BLK2: Alias(s):
        PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)
  BLK4: Alias(s):
        PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(2,GPT,01425A6F-B1D4-4CFE-95DB-B72AE60DC
726,0x12C800,0x200000)
  BLK5: Alias(s):
        PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(3,GPT,63168DC9-AA71-4FFA-A7CD-01F24A985
BC6,0x32C800,0x7414000)
Press ESC in 1 seconds to skip startup.nsh or any other key to continue.
Shell>
Shell> fs0:
FS0:\> cd 3003
FS0:\3003> load ChelsioUD.efi
Image 'FS0:\3003\ChelsioUD.efi' loaded at 6C679000 - Success
FS0:\3003> _


```

- viii. Invoke the **Driver config** utility using **drvcfg -s** command.


```

UEFI Interactive Shell v2.2
EDK II
UEFI v2.90 (American Megatrends, 0x00050020)
Mapping table
  FS0: Alias(s):HD0s0b:;BLK1:
      PciRoot(0x0)/Pci(0x14,0x0)/USB(0x12,0x0)/HD(1,MBR,0x1288D8F8,0x800,0x1D35600)
  FS1: Alias(s):HD1b65535a1:;BLK3:
      PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(1,GPT,E1FD35D8-185A-4A43-BC2B-23656AC92
29F,0x800,0x12C000)
  BLK0: Alias(s):
      PciRoot(0x0)/Pci(0x14,0x0)/USB(0x12,0x0)
  BLK2: Alias(s):
      PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)
  BLK4: Alias(s):
      PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(2,GPT,01425A6F-B1D4-4CFE-95DB-B72AE60DD
726,0x12C800,0x200000)
  BLK5: Alias(s):
      PciRoot(0x0)/Pci(0x19,0x0)/Sata(0x1,0xFFFF,0x0)/HD(3,GPT,63168DC9-AA71-4FFA-A7CD-01F24A985
BC6,0x32C800,0x7414000)
Press ESC in 1 seconds to skip startup.nsh or any other key to continue.
Shell>
Shell> fs0:
FS0:\> cd 3003
FS0:\3003> load ChelsioUD.efi
Image 'FS0:\3003\ChelsioUD.efi' loaded at 6C679000 - Success
FS0:\3003> drvcfg -s_
    
```


- ix. The following configuration utility window appears. Select **Chelsio T7 Adapter** and press *[Enter]*.

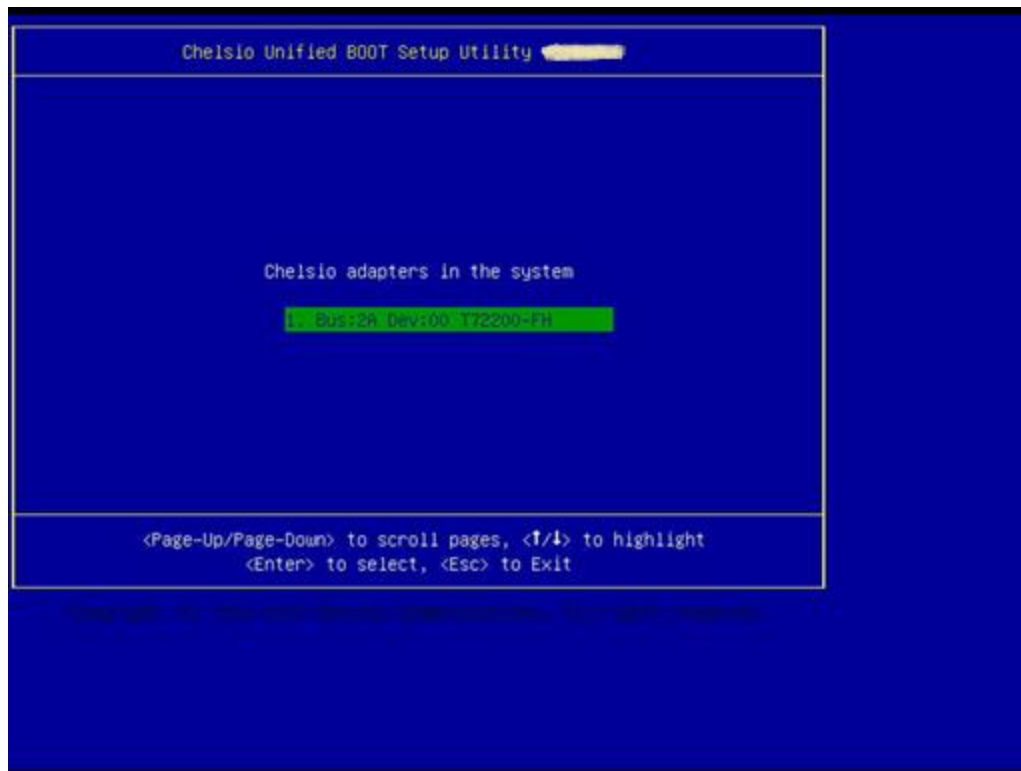


- x. Select **Chelsio Flash Utility** and press *[Enter]*.

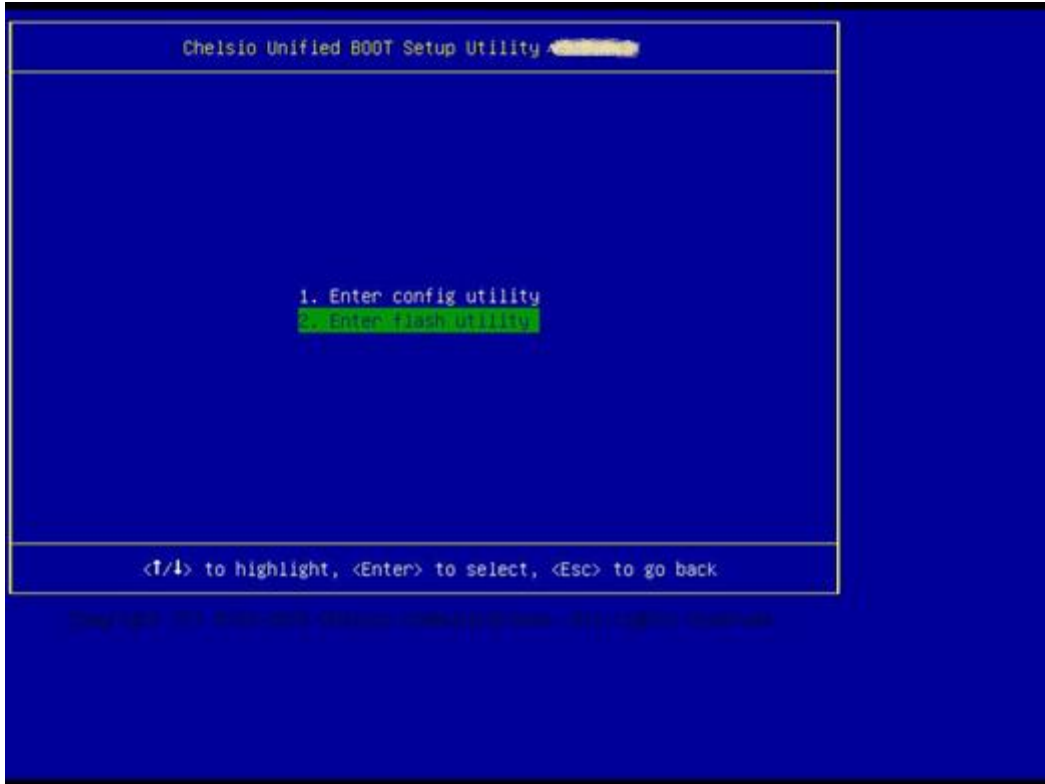


- xi. Select **OptionROM** and press *[Enter]*.

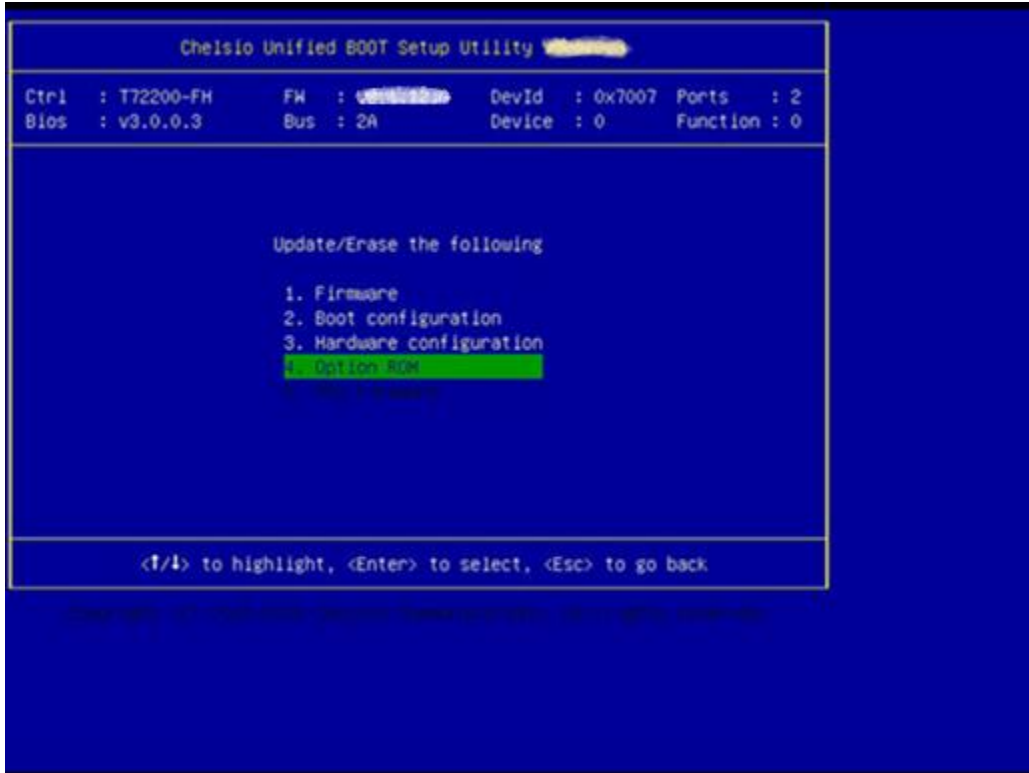


- xii. Select **Update** and press *[Enter]*.

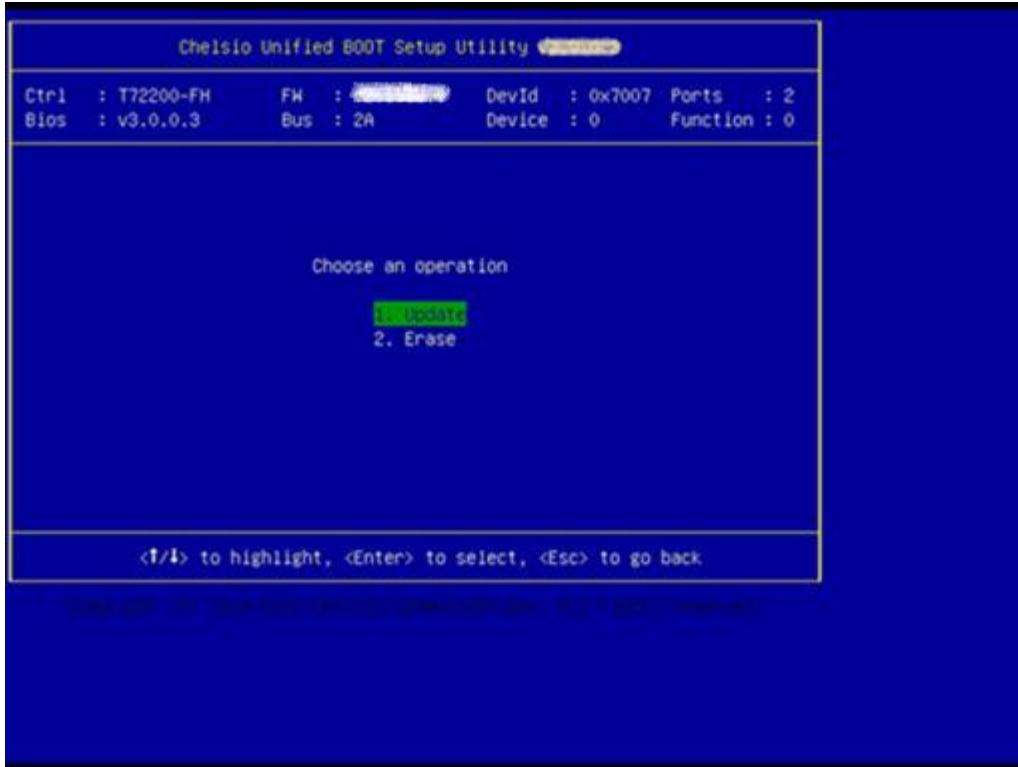


- xiii. Provide the path to OptionROM and press *[Enter]*. Once OptionROM flash completes, press *[Enter]* to go back to the previous menu.

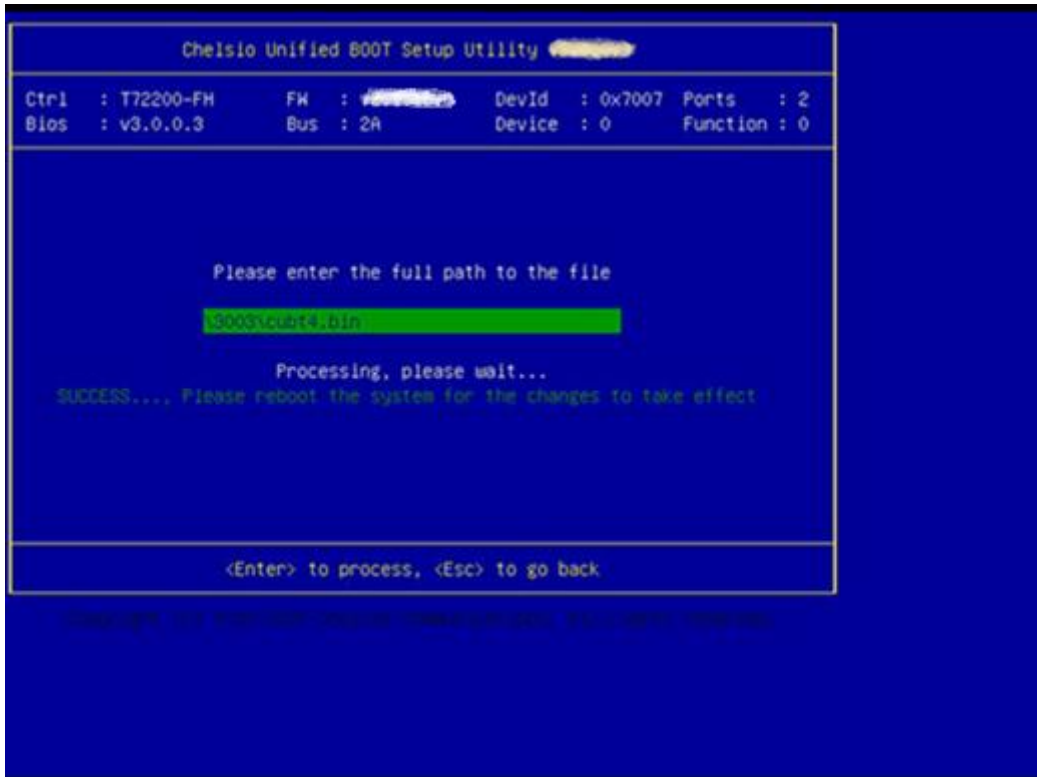


- xiv. Select **Boot Configuration** and press *[Enter]*.

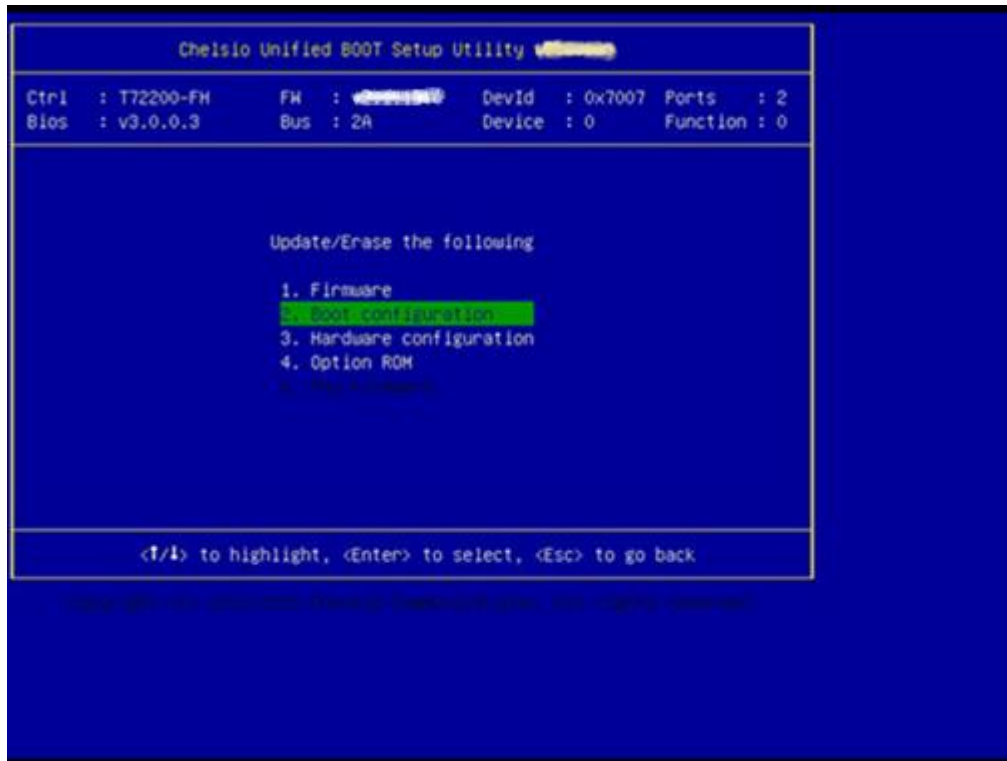


xv. Select **Update** and press *[Enter]*.

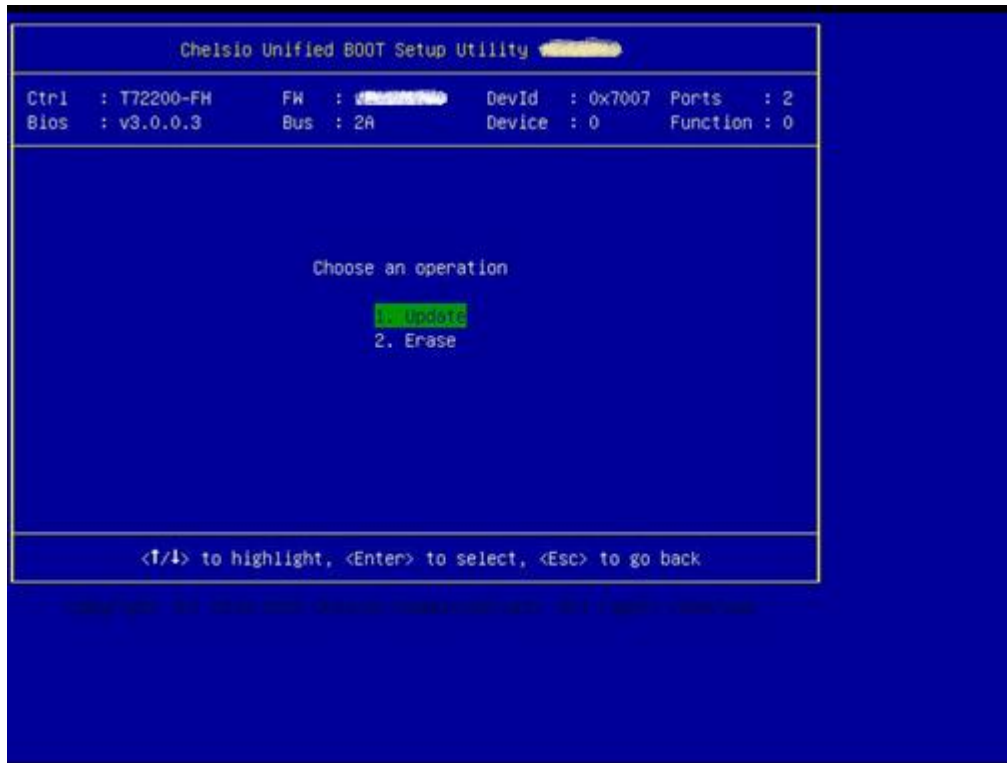

xvi. Provide path to *boot.cfg* and press *[Enter]*.

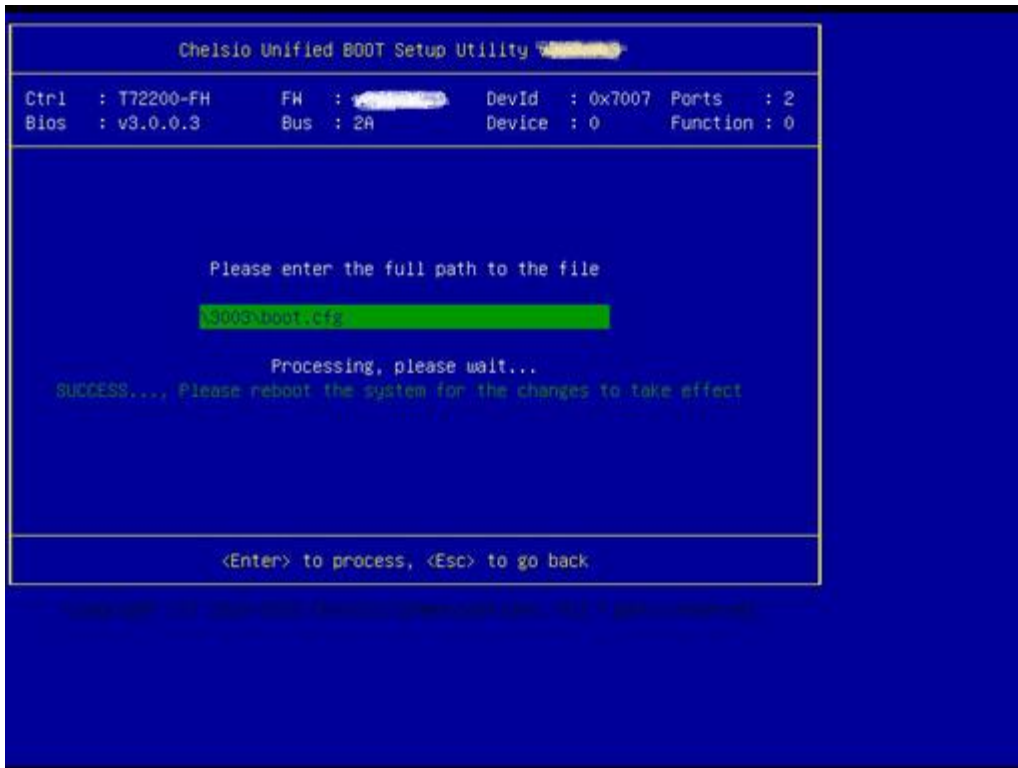


xvii. To flash Firmware, press *Esc* until the following screen appears.

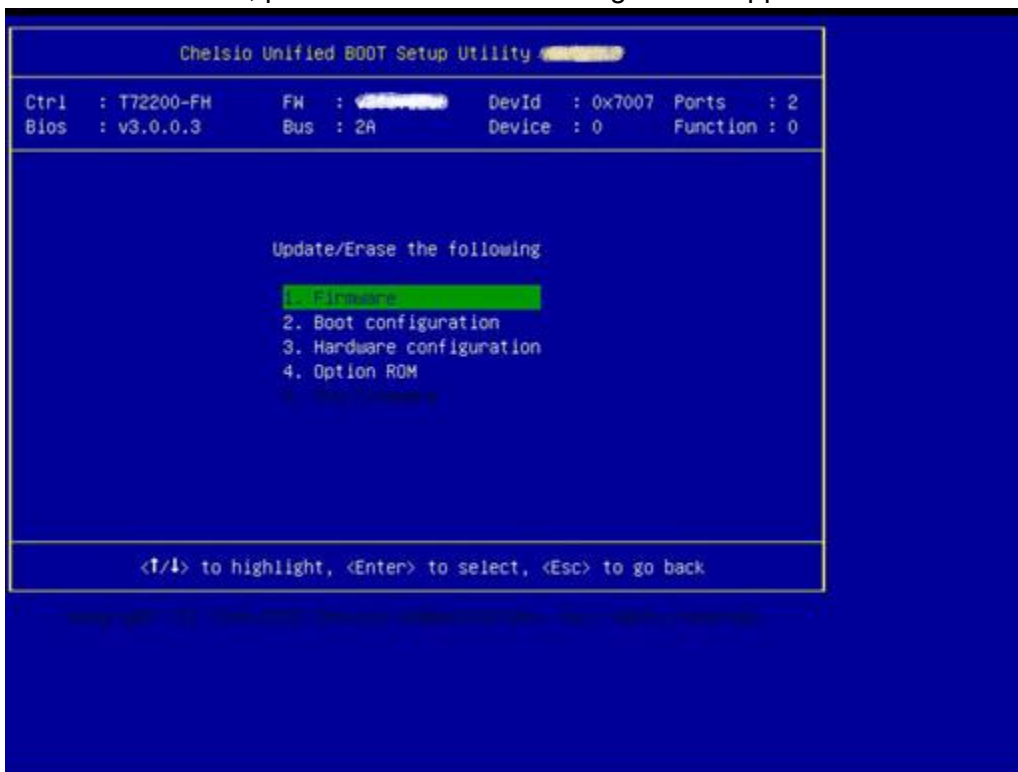


**Note** If Chelsio T7 is not listed, please ensure that Chelsio uEFI driver is loaded correctly as mentioned [here](#) in the **Flashing Firmware and Option ROM** section.


xviii. Select **Update**.

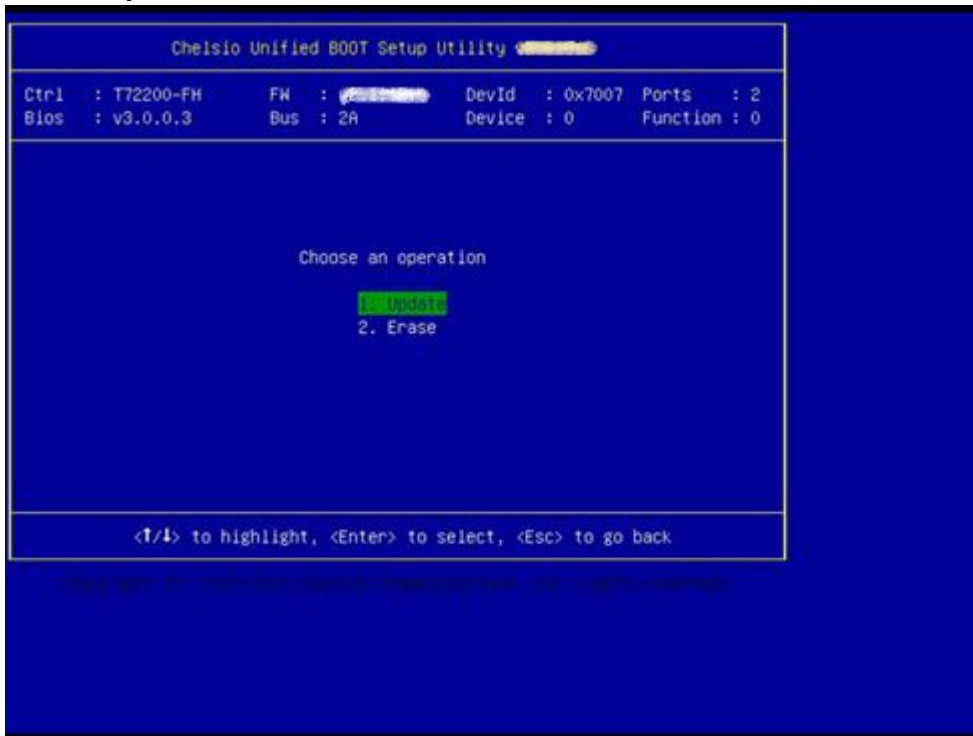

xix. Enter path to the firmware bin file.

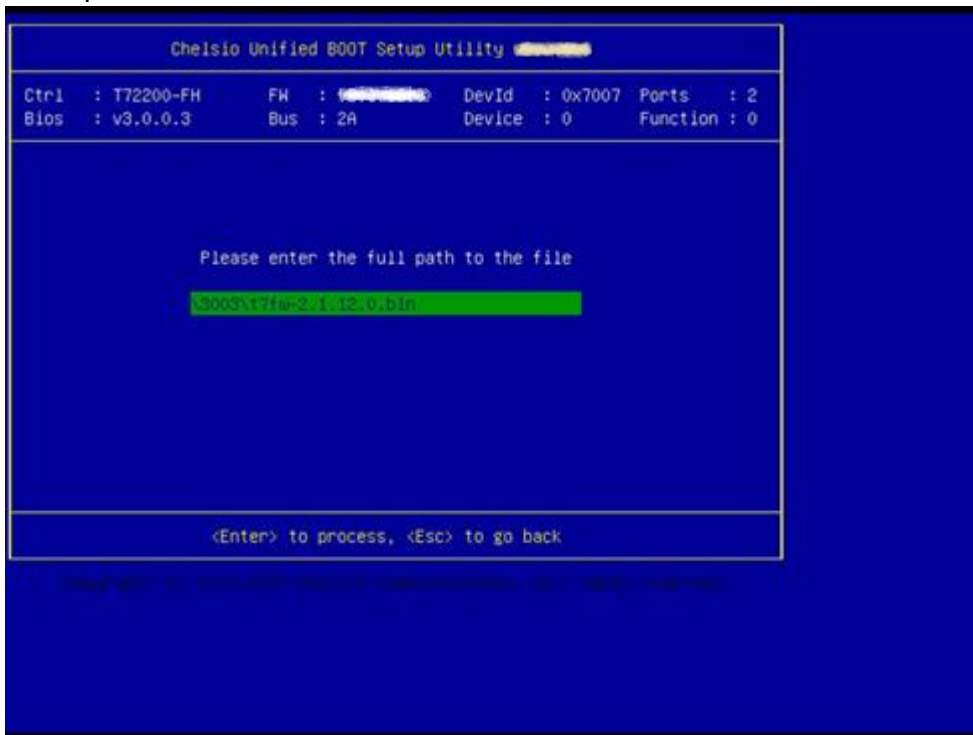

xx. The following screen appears with successful firmware flash.

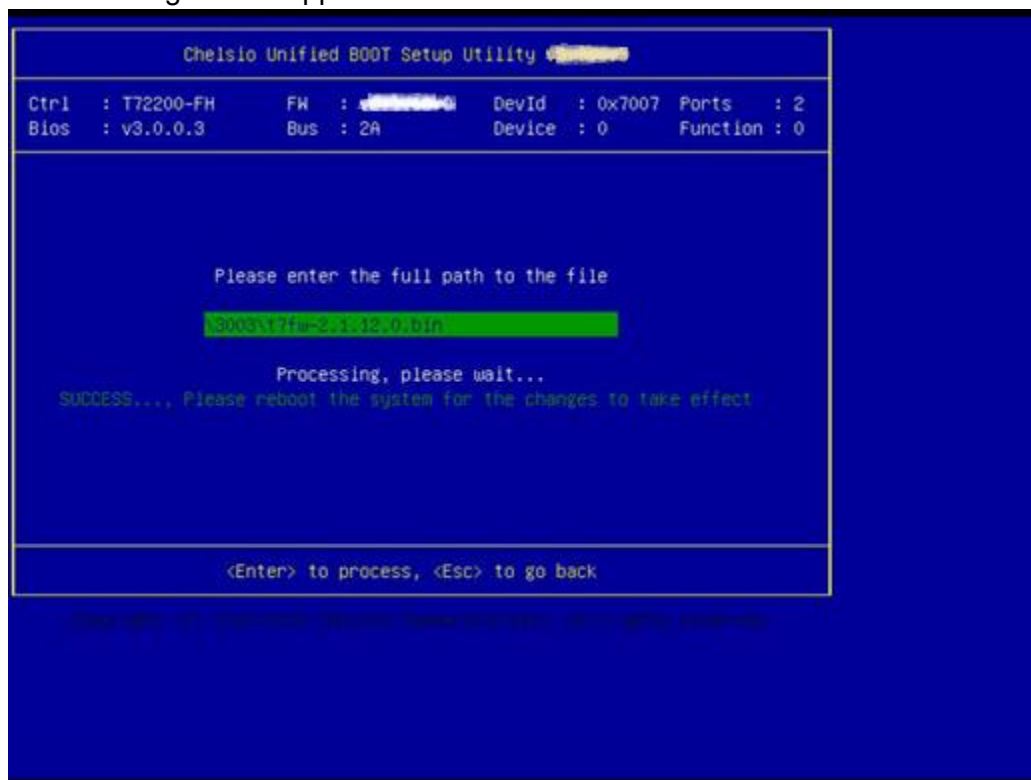


xxi. Reboot the system.

## 3.2. Configuring PXE Server

The following components are required to configure a PXE Server:

- DHCP Server
- TFTP Server

PXE server configuration steps for different operating systems can be found on following links:

 **Note** *Chelsio Communications does not take any responsibility regarding contents given in below mentioned links. They are provided for example purposes only.*

### Linux

- [https://docs.redhat.com/en/documentation/red\\_hat\\_enterprise\\_linux/8/html/automatically\\_installing\\_rhel/preparing-for-a-network-install\\_rhel-installer](https://docs.redhat.com/en/documentation/red_hat_enterprise_linux/8/html/automatically_installing_rhel/preparing-for-a-network-install_rhel-installer)
- [http://www.howtoforge.com/ubuntu\\_pxe\\_install\\_server](http://www.howtoforge.com/ubuntu_pxe_install_server)

### Windows

- <http://technet.microsoft.com/en-us/library/cc771670%28WS.10%29.aspx>
- <http://tftpd32.jounin.net/> (Use port # 67, set PXE option and provide bootable file name in settings)
- <http://unattended.sourceforge.net/pxe-win2k.html>

### 3.2.1. Building custom initrd

Perform the following steps to build initrd file:

- i. Locate the **initrd.img** file corresponding to the operating system you intend to update. For the purpose of example, RHEL10.1 was used


```
[root@host ~]# mount -o loop,ro RHEL-10.1-20251021.0-x86_64-dvd1.iso /mnt
[root@host ~]# cd /mnt/
[root@host mnt]# ls
AppStream BaseOS EFI EULA extra_files.json GPL images isolinux
media.repo RPM-GPG-KEY-redhat-beta RPM-GPG-KEY-redhat-release
[root@host mnt]# find . | grep initrd.img
./images/pxeboot/initrd.img
./isolinux/initrd.img
```

- ii. Create a folder to unzip the **initrd.img** and browse to the following folders:


```
[root@host ~]# mkdir initrd_workdir
```

- iii. Unpack the image into the above created directory using the following command:

```
[[root@host ~]# cd initrd_workdir
[root@host initrd_workdir]# xzcat /mnt/images/pxeboot/initrd.img | cpio -
idmv
```

 **Note** Use `zcat` instead of `xzcat` in case the image is gzip compressed.

- iv. The **cxgb4.ko** driver files for the required OSES are in the following directory inside the package.

 **Note** This package only supports RHEL9.7/9.6, RHEL10.1/10.0, Rocky10.0 (example not mentioned).

```
[root@host ~]# # ls -R ChelsioUwire-x.x.x.x/Uboot/LinuxDrivers/
ChelsioUwire-x.x.x.x/Uboot/LinuxDrivers/:
RHEL10.1 RHEL10.0 RHEL9.7 RHEL9.6
ChelsioUwire-x.x.x.x/Uboot/LinuxDrivers/RHEL10.1:
cxgb4.ko
ChelsioUwire-x.x.x.x/Uboot/LinuxDrivers/RHEL10.0:
cxgb4.ko
ChelsioUwire-x.x.x.x/Uboot/LinuxDrivers/RHEL9.7:
cxgb4.ko
ChelsioUwire-x.x.x.x/Uboot/LinuxDrivers/RHEL9.6:
cxgb4.ko
```

- v. Replace the driver with your updated **T7 cxgb4.ko** driver. Make sure to replace the kernel version with the kernel version of the target OS:

```
[root@host initrd_workdir]# cp /<path_to_t7_cxgb4.ko_file>/cxgb4.ko
lib/modules/<kernel_version>/kernel/drivers/net/ethernet/chelsio/cxgb4/cxgb4
.ko
```

**Example** - For RHEL9.7 follow below steps:

```
[root@host initrd_workdir]# cp /<path_to_package>/ChelsioUwire-
x.x.x.x/Uboot/LinuxDrivers/RHEL9.7/cxgb4.ko lib/modules/5.14.0-
611.5.1.el9_7.x86_64/kernel/drivers/net/ethernet/chelsio/cxgb4/
```

**Example** - For RHEL9.6 follow below steps:

```
[root@host initrd_workdir]# cp /<path_to_package>/ChelsioUwire-
x.x.x.x/Uboot/LinuxDrivers/RHEL9.6/cxgb4.ko lib/modules/5.14.0-
570.12.1.el9_6.x86_64/kernel/drivers/net/ethernet/chelsio/cxgb4/
```

**Example** - For RHEL10.1 follow below steps:

```
[root@host initrd_workdir]# cp /<path_to_package>/ChelsioUwire-
x.x.x.x/Uboot/LinuxDrivers/RHEL10.1/cxgb4.ko usr/lib/modules/6.12.0-
124.8.1.el10_1.x86_64/kernel/drivers/net/ethernet/chelsio/cxgb4/
```

**Example** - For RHEL10.0 follow the below steps:

```
[root@host initrd_workdir]# cp /<path_to_package>/ChelsioUwire-
x.x.x.x/Uboot/LinuxDrivers/RHEL10.0/cxgb4.ko usr/lib/modules/6.12.0-
55.9.1.el10_0.x86_64/kernel/drivers/net/ethernet/chelsio/cxgb4
```

 **Note** *Make sure to replace the kernel version with the kernel version of the target OS.*

vi. Add **t7fw-2.1.x.x.bin** from the package to the firmware directory and create a symlink:

```
[root@host initrd_workdir]# cp /<path_to_package>/ChelsioUwire-
x.x.x.x/Uboot/OptionROM/t7fw-2.1.x.x.bin lib/firmware/cxgb4/
[root@host initrd_workdir]# ln -sf lib/firmware/cxgb4/t7fw-2.1.x.x.bin
lib/firmware/cxgb4/t7fw.bin
```

vii. Create a modprobe configuration file for **iw\_cxgb4** as below:

```
[root@host initrd_workdir]# echo "install iw_cxgb4 /bin/true" | tee
etc/modprobe.d/iw_cxgb4.conf
```

viii. Run **depmod** to create the dependencies file for the updated driver:

```
[root@host~]# depmod -a -b . <kernel_version>
```

**Example** - For RHEL9.7 follow below steps:

```
[root@host initrd_workdir]# depmod -a -b . 5.14.0-611.5.1.el9_7.x86_64
```

**Example** - For RHEL9.6 follow below steps:

```
[root@host initrd_workdir]# depmod -a -b . 5.14.0-570.12.1.el9_6.x86_64
```

**Example** - For RHEL10.1 follow below steps:

```
[root@host initrd_workdir]# depmod -a -b . 6.12.0-124.8.1.el10_1.x86_64
```

**Example** - For RHEL10.0 follow below steps:

```
[root@host initrd_workdir]# depmod -a -b . 6.12.0-55.9.1.el10_0.x86_64
```

 **Note** *Make sure to replace the kernel version with the kernel version of the target OS.*

ix. Re-pack the modified initrd image using the following command:

```
[root@host initrd_workdir]# find . | cpio -o -H newc | gzip >
/<path_to_new_initrd_with_t7_change>/t7_initrd.img
```

### 3.2.2. PXE Server Configuration

Use the previously generated custom initrd image to configure PXE Server.

Below is a sample configuration of grub.cfg for RHEL10.1:

```
menuentry 'Install RHEL 10.1' {
  linuxefi <tftp_or_http_path>/vmlinuz modprobe.blacklist=iw_cxgb4,cxgb4i
  inst.repo=<IP of the
  HTTP server> inst.stage2=<IP of HTTP server>
  initrdefi <tftp_or_http_path>/<generated_initrd_image_name>.img
}
```

**Example:**

```
menuentry 'Install RHEL 10.1 (verbose)' {
  linuxefi RHEL10.1/vmlinuz modprobe.blacklist=iw_cxgb4,cxgb4i
  inst.repo=http://102.50.50.33/RHEL9.6/ inst.stage2=http://102.50.50.33/RHEL9.6/
  initrdefi RHEL10.1/t7_initrd.img.img
}
```

### 3.3. PXE Boot Process

Before proceeding, ensure that the Chelsio T7 Adapter has been flashed with the provided firmware and option ROM and boot.cfg (See [Flashing Firmware and option ROM](#)).

#### 3.3.1. PXE Boot

##### ! Important

- Only uEFI v2.3.1 and above are supported.
- Any other uEFI version is NOT SUPPORTED and may render your system unusable.

This section describes the method to configure and use Chelsio uEFI PXE interfaces.

- Reboot the system and go into the BIOS setup.
- Disable Secure Boot, if not already done.
- Chelsio HII should be listed as **Chelsio T7**. Highlight it and press *[Enter]*.

```

Apio Setup - AMI
-----
Advanced

Network Stack                [Enabled]
IPv4 PXE Support             [Enabled]
IPv4 HTTP Support           [Disabled]
IPv6 PXE Support            [Disabled]
IPv6 HTTP Support           [Disabled]
PXE Boot Wait Time          0
Media Detect Count          1

▶ MAC:7CC2552FC560-IPv6 Network Configuration
▶ MAC:7CC2552FC560-IPv4 Network Configuration
▶ MAC:7CC2552FC561-IPv6 Network Configuration
▶ MAC:7CC2552FC561-IPv4 Network Configuration
▶ Chelsio T5/T6/T7
▶ MAC:00074383B700-IPv6 Network Configuration
▶ MAC:00074383B700-IPv4 Network Configuration
▶ MAC:00074383B708-IPv6 Network Configuration
▶ MAC:00074383B708-IPv4 Network Configuration

Configure Chelsio T5/T6/T7
Unified BOOT PXE, FCOE &
iSCSI parameters.

--+: Select Screen
↑↓: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
F5: Keyword Search
ESC: Exit


Version 2.22.1290 Copyright (C) 2025 AMI

```

##### i Note

If Chelsio T7 is not listed, please ensure that Chelsio uEFI driver is loaded correctly as mentioned [here](#) in the **Flashing Firmware and Option ROM** section.


- iv. Select the Chelsio adapter to be configured and press *[Enter]*.

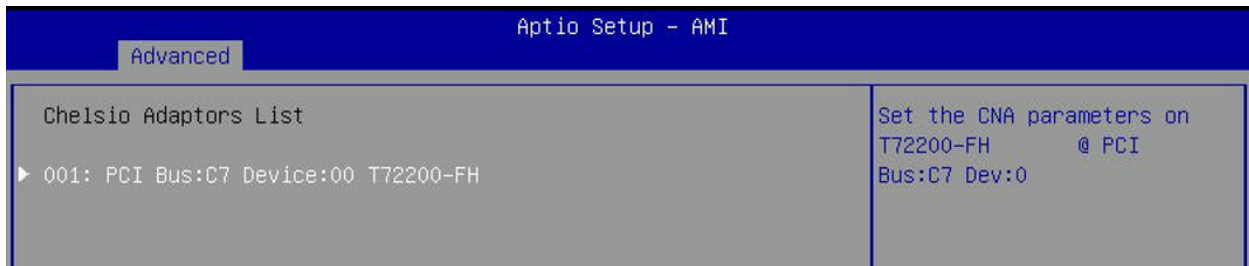

- v. Select **Configuration Utility** and press *[Enter]*.




- vi. Enable adapter BIOS if not already enabled.

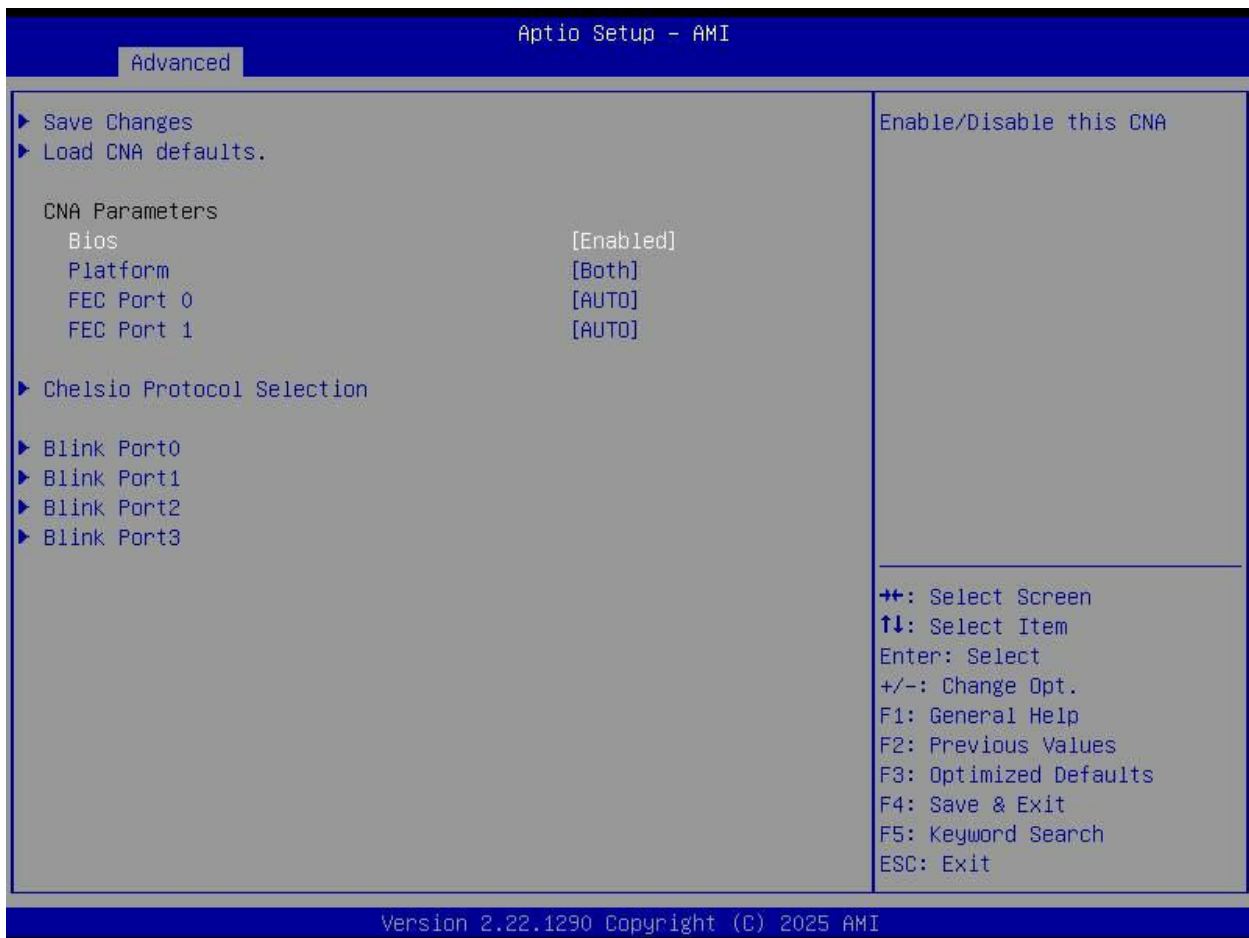


**Note** *It is highly recommended that you use the **Save Changes** option every time a parameter/option is changed.*


vii. Select **Chelsio Protocol Selection** and press **[Enter]**.

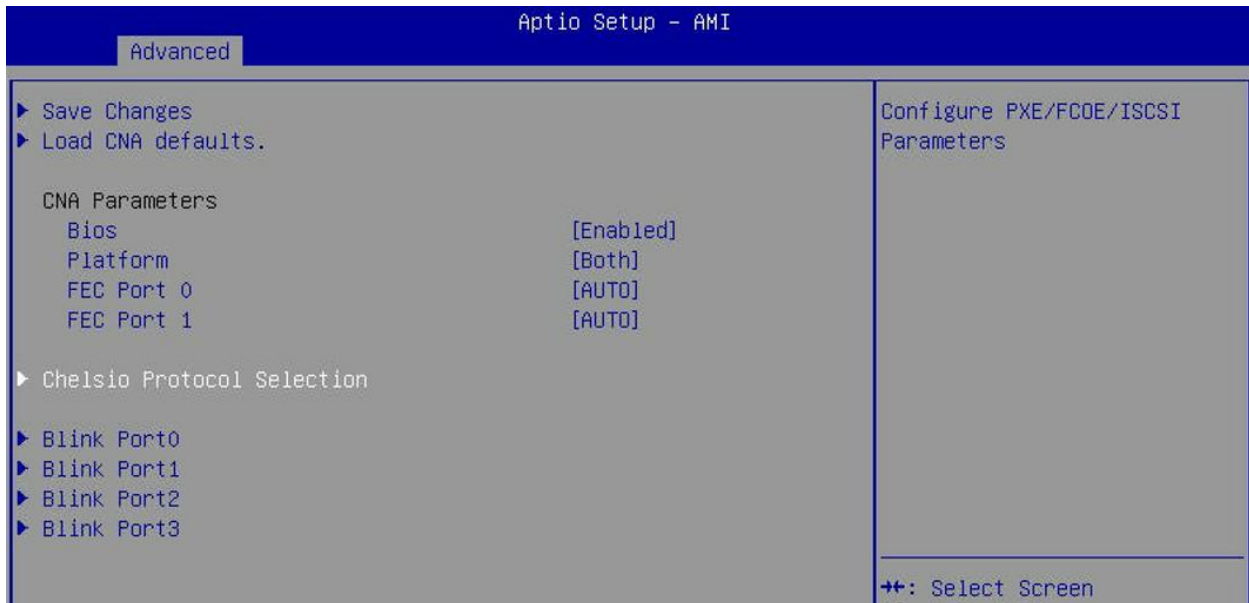


viii. Select **PXE** and press **[Enter]**.

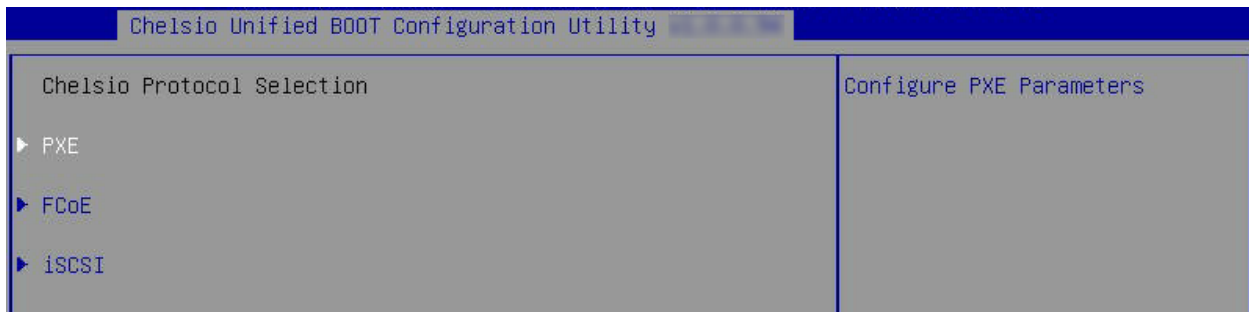


ix. Choose the boot port to try PXE boot. It is recommended to enable only those functions and ports which are going to be used. Note that enabling PXE Function 0 will enable port 0 for PXE, enabling PXE Function 1 will enable port 1 and so on, for NIC function.

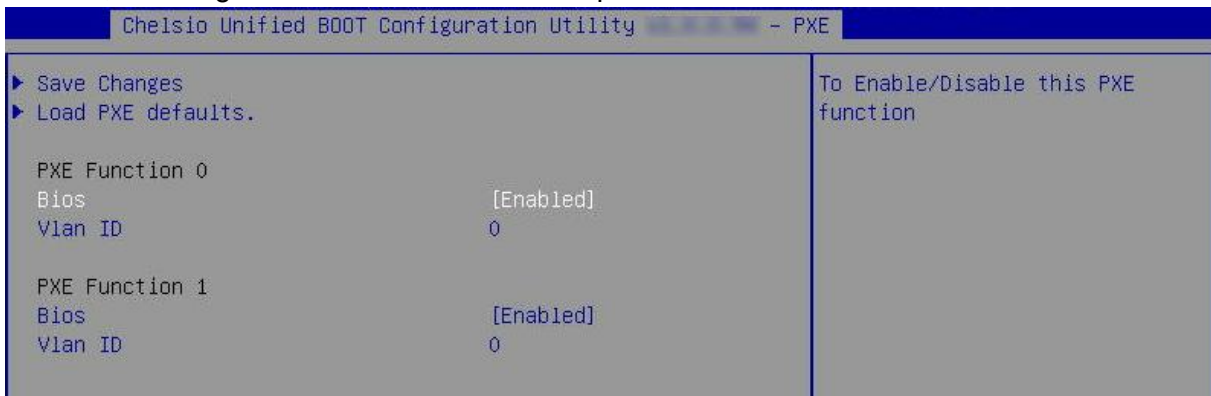

- x. Select **Save Changes** and press *[Enter]*.

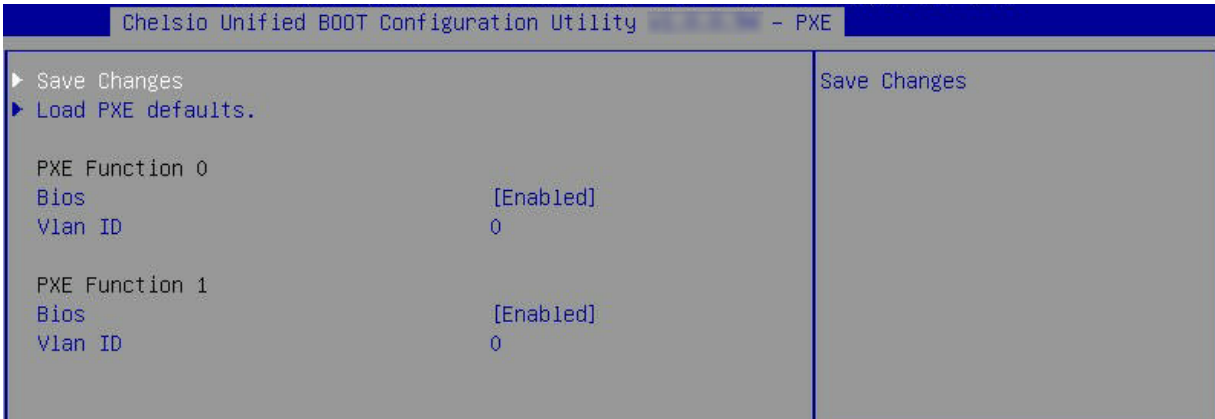


- xi. Reboot the system and press **F11** to go to boot manager, choose any of the available Chelsio PXE devices for PXE boot.

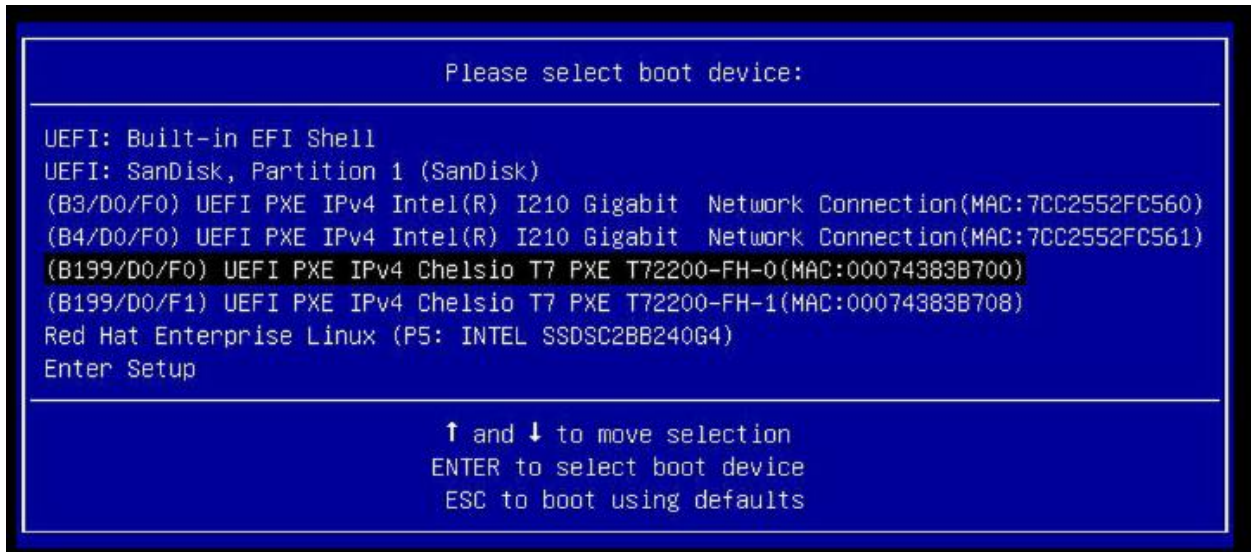

## 3.4. OS Installation

- i. Reboot the host, press **F11** and select Chelsio Adapter T7 as the boot option.

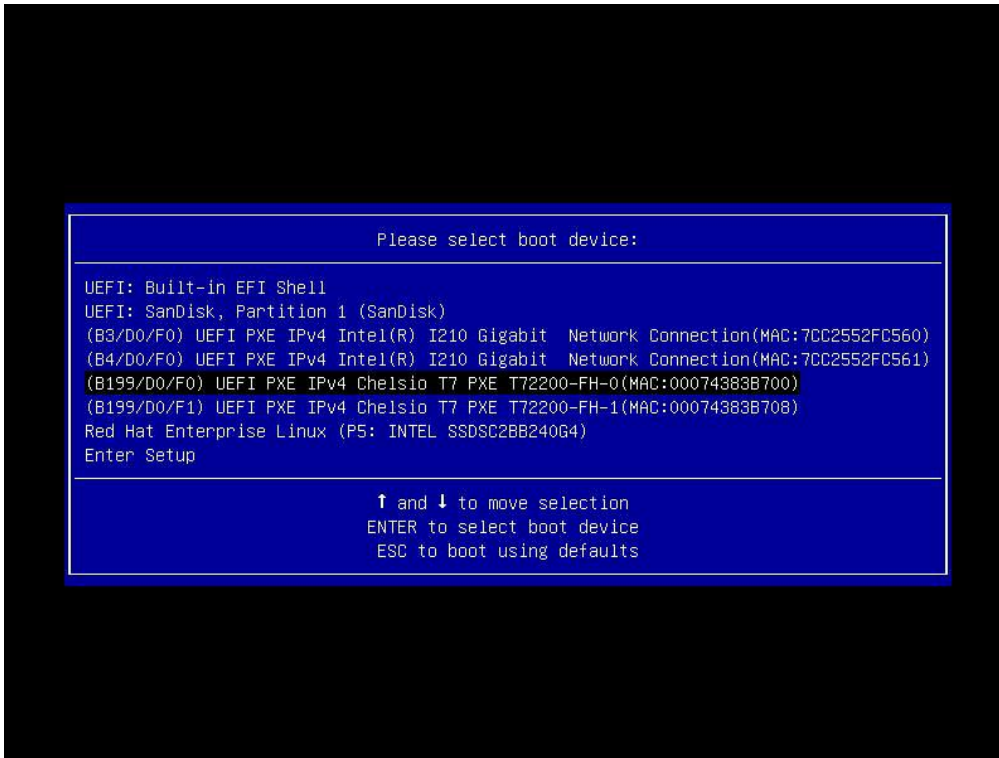

- ii. The following screen appears.




- iii. In the following screen, PXE boot begins and a OS menu is listed, select an OS for installation.

**Note** For the purpose of this document RHEL9.6 installation is shown.



- iv. Installation of OS begins. Select the installation language and click **Continue**.

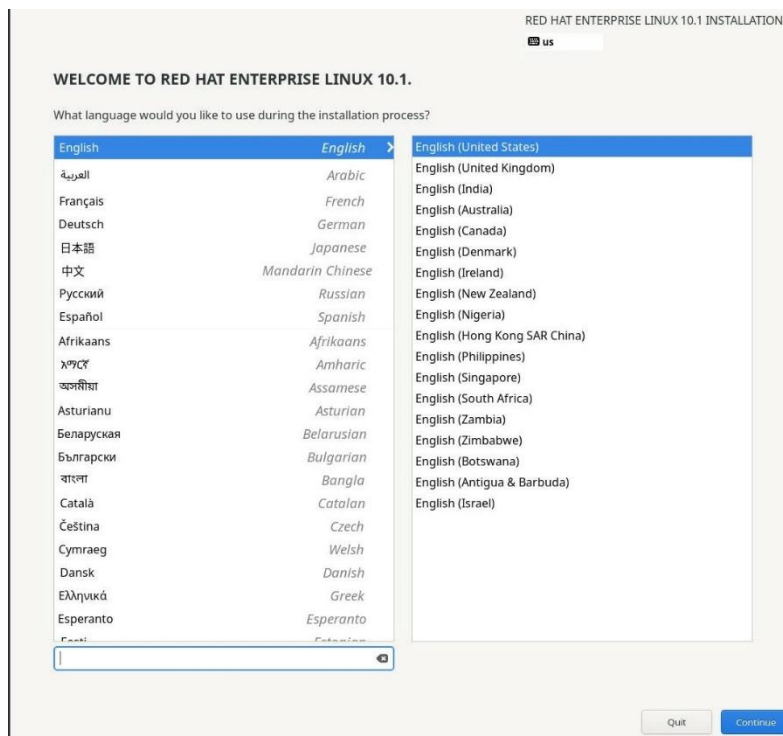

- v. Follow the onscreen instructions and proceed with the installation.
- vi. After installation, reboot the host.

## 4. Unified Boot for T6 Adapter

### 4.1. Flashing Firmware and Option ROM

Depending on the boot mode selected, Chelsio Unified Boot provides the following methods to flash Firmware, Option ROM, and boot configuration onto the Chelsio adapters:

- Legacy mode: cfut4
- uEFI mode:
  - HII
  - drvcfg
  - Firmware Manager Protocol (FMP)
- OS Level:
  - cxgbtool

These methods also provide the functionality to update/erase Hardware configuration and Phy Firmware files.

**Important**

*It is highly recommended to use the same Option ROM (type and version) on all the Chelsio adapters present in the system.*

#### 4.1.1. Preparing USB flash drive

This document assumes that you are using a USB flash drive as a storage media for the necessary files. Follow the steps below to prepare the drive:


1. Create a DOS bootable USB flash drive. ([Click here](#) for instructions)
2. Create a directory *CHELSIO* on the USB flash drive.
3. If you have not done already, then download the driver package from [Chelsio Download Center](#).
4. Extract the downloaded package and change your working directory to *OptionROM* directory.

```
[root@host~]# tar zxvfm ChelsioUwire-x.x.x.x.tar.gz
[root@host~]# cd ChelsioUwire-x.x.x.x/Uboot/OptionROM
```

5. Copy all the files and place them in the *CHELSIO* directory created on the USB flash drive.
6. Plug-in the USB flash drive in the system on which the Chelsio CNA is installed.
7. Reboot the system.

### 4.1.2. Legacy

1. In BIOS, configure the system which has the Chelsio adapter to boot in Legacy mode.

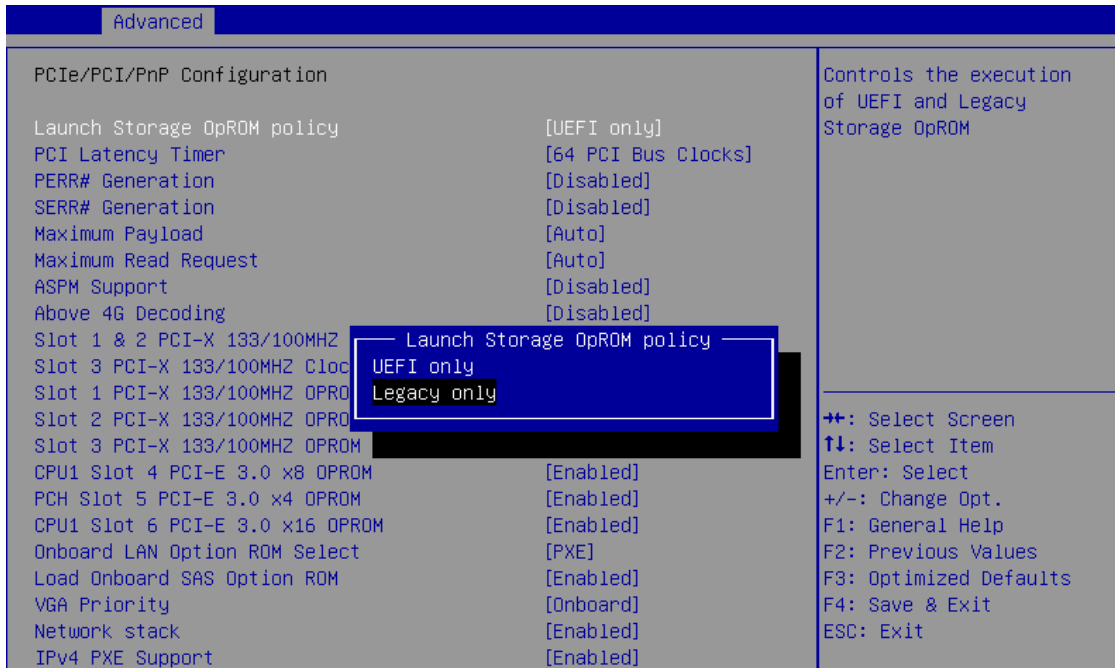

2. Boot the system from the plugged in USB flash drive and change your working directory to the CHELSIO directory.

```
C:\>cd CHELSIO
```

3. Run the following command to list all the Chelsio adapters present on the system. The list displays a unique index for each adapter found.

```
C:\CHELSIO>cfut4 -l
```



4. Delete any previous version of Option ROM flashed onto the adapter.

```
C:\CHELSIO>cfut4 -d <idx> -xb
```

Here, `idx` is the adapter index found in step iii (0 in this case).

```
C:\CHELSIO>cfut4 -d 0 -xb

Chelsio T5/T6 Flash Utility v1.5

Erasing serial flash sector(s) ... Done
Reboot machine for changes to take effect
```

5. Delete any previous firmware using the following command.

```
C:\CHELSIO>cfut4 -d <idx> -xh -xf
```

```
C:\CHELSIO>cfut4 -d 0 -xh -xf

Chelsio T5/T6 Flash Utility v1.5

Erasing serial flash sector(s) ... Done
Erasing serial flash sector(s) ... Done
Reboot machine for changes to take effect
```

6. Delete any previous Option ROM settings.

```
C:\CHELSIO>cfut4 -d <idx> -xc
```

```
C:\CHELSIO>cfut4 -d 0 -xc

Chelsio T5/T6 Flash Utility v1.5

Erasing serial flash sector(s) ... Done
Reboot machine for changes to take effect
```

7. Run the following command to flash the appropriate firmware.

```
C:\CHELSIO>cfut4 -d <idx> -uf <firmware_file>.bin
```

Here, `firmware_file` is the firmware image file present in the `CHELSIO` directory.

```
C:\CHELSIO>cfut4 -d 0 -uf T6FW-1~1.BIN

Chelsio T5/T6 Flash Utility v1.5

Erasing serial flash sector(s) ... Done
Writing Image at Base 00080000 ... Done
Writing Image at Base 00088000 ... Done
Writing Image at Base 00090000 ... Done
Writing Image at Base 00098000 ... Done
Writing Image at Base 000a0000 ... Done
Writing Image at Base 000a8000 ... Done
Writing Image at Base 000b0000 ... Done
Writing Image at Base 000b8000 ... Done
Writing Image at Base 000c0000 ... Done
Writing Image at Base 000c8000 ... Done
Writing Image at Base 000d0000 ... Done
Writing Image at Base 000d8000 ... Done
Writing Image at Base 000e0000 ... Done
Writing Image at Base 000e8000 ... Done
Writing Image at Base 000f0000 ... Done
Writing Image at Base 000f8000 ... Done
Reboot machine for changes to take effect
```

- Flash the Unified Boot Option ROM using the following command.

```
C:\CHELSIO>cfut4 -d <idx> -ub cubt4.bin
```

Here, cubt4.bin is the Unified Boot Option ROM image file present in the *CHELSIO* directory.

```
C:\CHELSIO>cfut4 -d 0 -ub cubt4.bin
Chelsio T5/T6 Flash Utility v1.5
Erasing serial flash sector(s) ... Done
Writing Image at Base 00000000 ... Done
Writing Image at Base 00008000 ... Done
Writing Image at Base 00010000 ... Done
Writing Image at Base 00018000 ... Done
Writing Image at Base 00020000 ... Done
Writing Image at Base 00028000 ... Done
Writing Image at Base 00030000 ... Done
Writing Image at Base 00038000 ... Done
Writing Image at Base 00040000 ... Done
Writing Image at Base 00048000 ... Done
Writing Image at Base 00050000 ... Done
Writing Image at Base 00058000 ... Done
Writing Image at Base 00060000 ... Done
Writing Image at Base 00068000 ... Done
Erasing serial flash sector(s) ... Done
Writing Image at Base 00070000 ... Done
Reboot machine for changes to take effect
```

- Flash the boot configuration setting, which will enable PXE and disable iSCSI and FCoE.

```
C:\CHELSIO>cfut4 -d <idx> -uc boot.cfg
```

```
C:\CHELSIO>cfut4 -d 0 -uc boot.cfg
Chelsio T5/T6 Flash Utility v1.5
Erasing serial flash sector(s) ... Done
Writing Image at Base 00070000 ... Done
```

- In case of multiple adapters in the system, repeat the steps from 4 through 9 to update/flash the firmware, Option ROM, and boot configuration on all of them.

- To configure the base MAC address (optional), use the below command:

```
C:\CHELSIO>cfut4 -d <idx> -um <Hex MAC Address>
```

*Example:*


```
C:\CHELSIO>cfut4 -d 0 -um 000743000123
```

- Reboot the system for changes to take effect.

### 4.1.3. uEFI

#### 4.1.3.1. Loading uEFI driver

- i. In BIOS, configure the system which has the Chelsio adapter to boot in the uEFI mode.

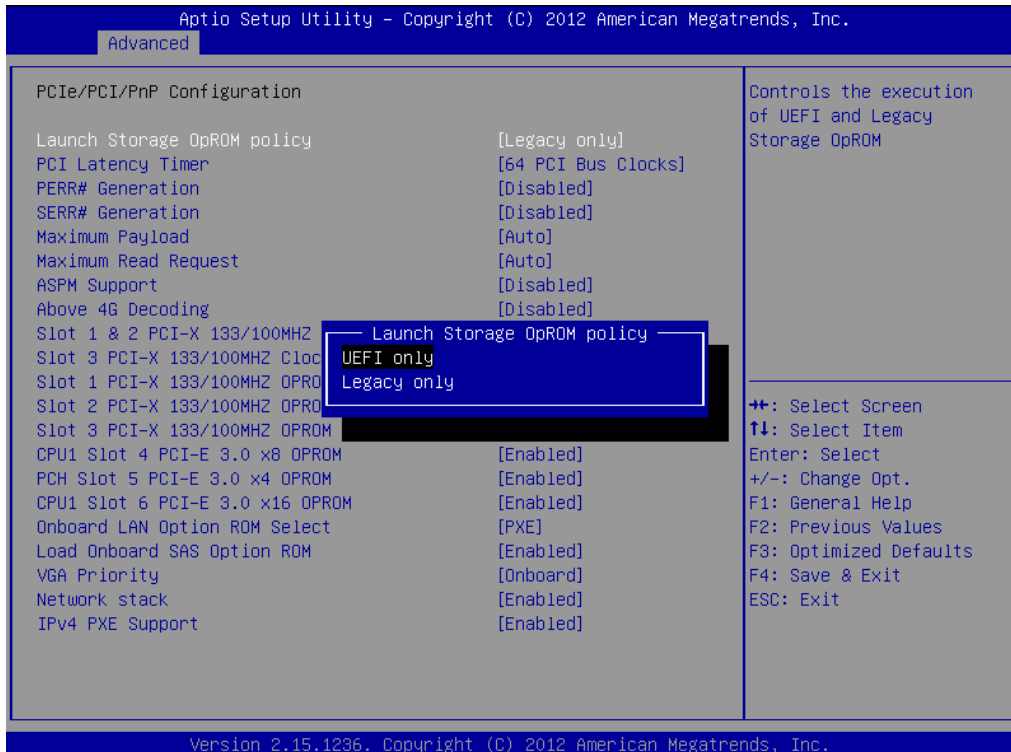

**Note** For Supermicro systems, enable **Network Stack** as well before proceeding.

- ii. Boot to EFI Shell.

```
EFI Shell version 2.31 [4.654]
Current running mode 1.1.2
Device mapping table
fs0 :Removable HardDisk - Alias hd83b0f0b blk0
      PciRoot(0x0)/Pci(0x1d,0x0)/USB(0x1,0x0)/USB(0x5,0x0)/HD(1,MBR,0x0fdb738d,0x800,0x78b800)
blk0 :Removable HardDisk - Alias hd83b0f0b fs0
      PciRoot(0x0)/Pci(0x1d,0x0)/USB(0x1,0x0)/USB(0x5,0x0)/HD(1,MBR,0x0fdb738d,0x800,0x78b800)
blk1 :HardDisk - Alias (null)
      PciRoot(0x0)/Pci(0x1f,0x2)/Sata(0x0,0x0)/HD(1,MBR,0x00092b0c,0x3f,0x9c25fe)
blk2 :HardDisk - Alias (null)
      PciRoot(0x0)/Pci(0x1f,0x2)/Sata(0x0,0x0)/HD(2,MBR,0x00092b0c,0x9c263d,0x88b8fdc)
blk3 :HardDisk - Alias (null)
      PciRoot(0x0)/Pci(0x1f,0x2)/Sata(0x0,0x0)/HD(3,MBR,0x00000000,0x927be19,0x14019e7)
blk4 :HardDisk - Alias (null)
      PciRoot(0x0)/Pci(0x1f,0x2)/Sata(0x0,0x0)/HD(4,MBR,0x00000000,0xa67d83f,0x13fe849)
blk5 :BlockDevice - Alias (null)
      PciRoot(0x0)/Pci(0x1f,0x2)/Sata(0x0,0x0)
blk6 :Removable BlockDevice - Alias (null)
      PciRoot(0x0)/Pci(0x1d,0x0)/USB(0x1,0x0)/USB(0x5,0x0)

Press ESC in 1 seconds to skip startup.nsh, any other key to continue.
Shell> _
```

- iii. Issue command `drivers` to determine if the Chelsio uEFI driver is already loaded. The below image shows that the driver is loaded.

```

A4 00000001 ? - - - <UNKNOWN>          SBDXE
A6 00000010 B - - 5 5 AMI Console Splitter Driver      ConSplitter
A9 00000010 D - - 1 - <UNKNOWN>          GraphicsConsole
AA 0000000A D - - 4 - Generic Disk I/O Driver          DiskIoDxe
AB 0000000B B - - 1 3 Partition Driver(MBR/GPT/El Torito) PartitionDxe
AC 00000010 D - - 2 - PCH Serial ATA Controller Initializ SataController
AE 00000010 B - - 1 2 AMI Generic LPC Super I/O Driver  GenericSio
B0 00000001 ? - - - - AMI IDE BUS Driver          IdeBusSrc
B2 00000010 ? - - - - AMI PS/2 Driver          PS2Main
B4 00A50105 B - - 2 72 <UNKNOWN>          PciBus
B6 00000010 B - - 2 2 <UNKNOWN>          TerminalSrc
B7 00000010 B - - 1 1 <UNKNOWN>          TerminalSrc
B8 0000000A D - - 2 - Simple Network Protocol Driver      SnpDxe
B9 0000000A B - - 2 8 MNP Network Service Driver      MnpDxe
BA 0000000A B - - 2 2 ARP Network Service Driver      ArpDxe
BB 0000000A B - - 2 2 DHCP Protocol Driver          Dhcp4Dxe
BC 0000000A D - - 2 - IP4 CONFIG Network Service Driver    Ip4ConfigDxe
BD 0000000A B - - 2 18 IP4 Network Service Driver      Ip4Dxe
BE 0000000A B - - 4 4 MTFTP4 Network Service      Mtftp4Dxe
BF 0000000A B - - 12 20 UDP Network Service Driver      Udp4Dxe
C0 0000000A D - - 1 - FAT File System Driver          Fat
C1 0000000A D - - 2 - iSCSI Driver          IScsiDxe
C2 0000000A D - - 2 - iSCSI Driver          IScsiDxe
C4 0000000A ? - - - - SCSI Bus Driver          ScsiBus
C5 0000000A ? - - - - Scsi Disk Driver          ScsiDisk
FA 00000010 ? - - - - AMI CSM Block I/O Driver      CsmBlockIo
FB 00000024 B - - 1 1 BIOS[INT10] Video Driver      CsmVideo
FC 00000010 ? - - - - <UNKNOWN>          <UNKNOWN>
158 0100005E B X X 3 3 Chelsio Unified Driver      Offset(0x3834,0x1D)
    
```

If the driver is not loaded, continue to step 5.

- iv. Note the handle and unload the driver.

```
fs0:\CHELSIO\> unload -n <driver_handle>
```

Example:

```
FS1:\CHELSIO\> unload -n 1A1
Unload - Handle [72892A18] Result Success.
```

- v. Load the uEFI driver (*ChelsioUD.efi*) present in the *CHELSIO* directory.


```
fs0:\CHELSIO> load ChelsioUD.efi
load: Image fs0:\CHELSIO\ChelsioUD.efi loaded at 7F2BA000 - Success
```

### 4.1.3.2. drvcfg


1. Ensure that the Chelsio uEFI driver is loaded correctly as mentioned in the [Loading uEFI driver](#) section.
2. Run the following command to launch the Unified Boot Setup utility.

```
fs0:\> drvcfg -s_
```


3. Choose the Chelsio adapter which needs to be configured.

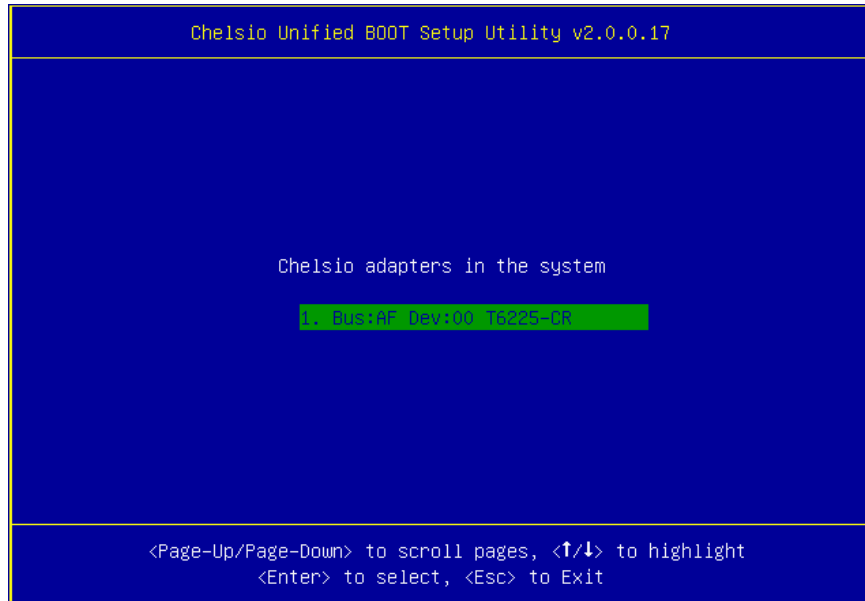


4. Highlight **Enter flash utility** and press *[Enter]*.

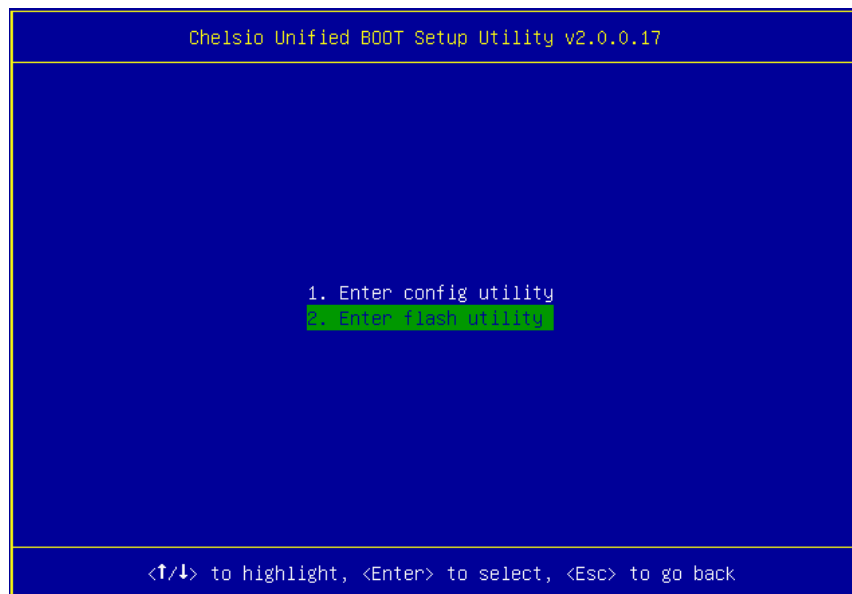

5. Highlight **Option ROM** and press *[Enter]*.

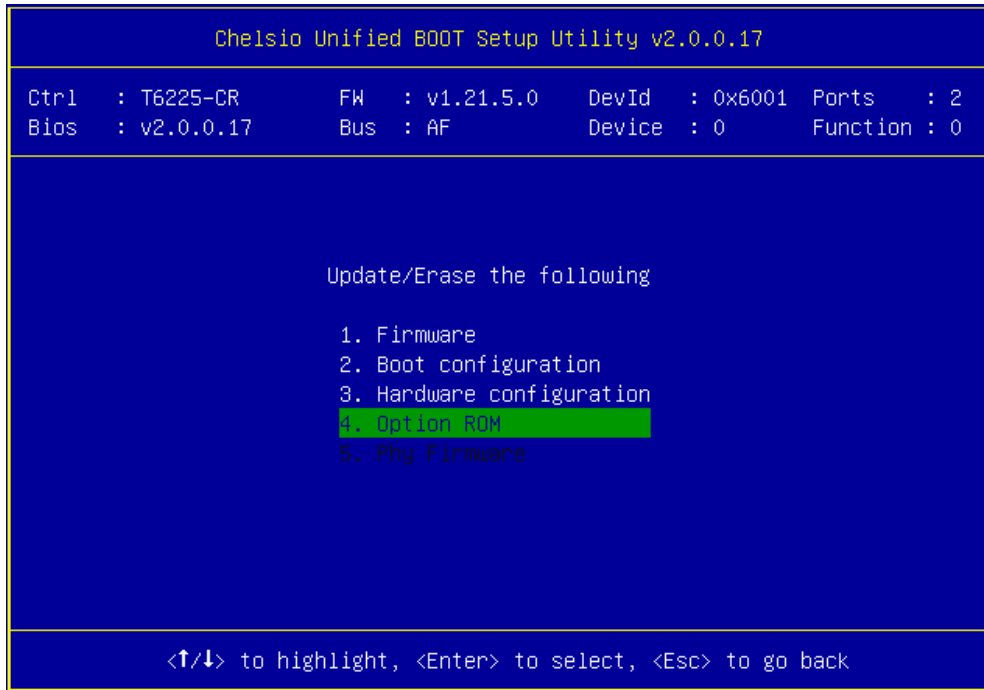

6. Highlight **Update** and press *[Enter]*.

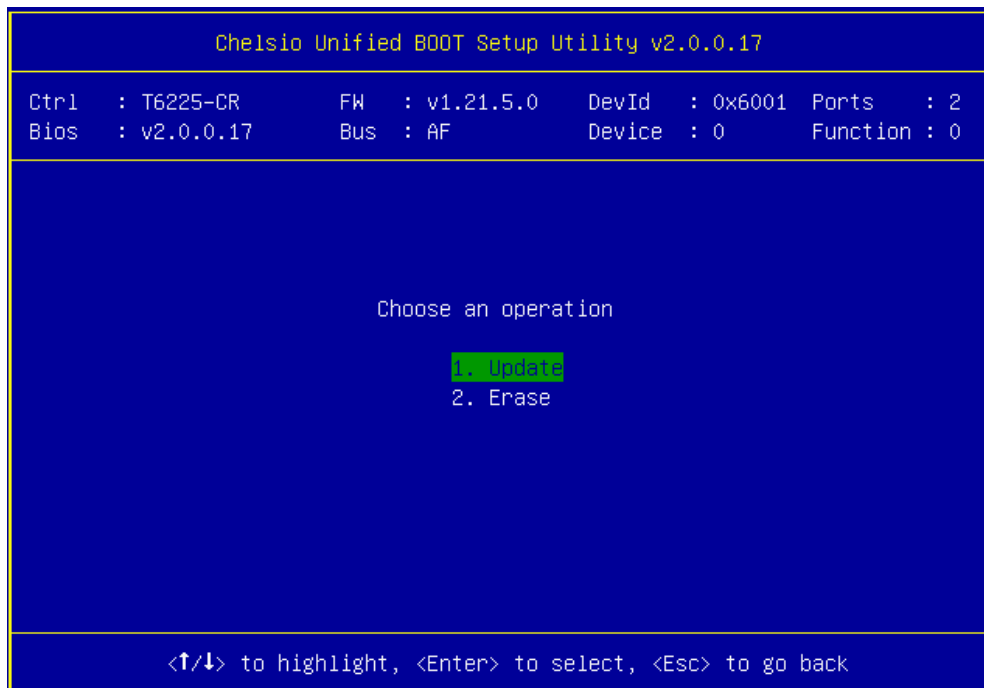

7. Enter the path to the **Option ROM file** and press *[Enter]*.

```

Chelsio Unified BOOT Setup Utility v2.0.0.17
-----
Ctrl  : T6225-CR      FW   : v1.21.5.0   DevId  : 0x6001   Ports  : 2
Bios  : v2.0.0.17    Bus  : AF         Device  : 0       Function : 0
-----

Please enter the full path to the file

signed_2.0.0.17\acubt4.bin

Processing, please wait...
SUCCESS..., Please reboot the system for the changes to take effect

<Enter> to process, <Esc> to go back
    
```


8. Similarly, you can use the above method to update firmware (*t6fw-x.xx.x.x.bin/t5fw-x.xx.x.x.bin*) and boot configuration (*boot.cfg*) present in the *CHELSIO* directory.
9. For multiple adapters in the system, repeat the above steps to update/flash the firmware, Option ROM, and boot configuration on all the adapters.
10. Reboot the machine for changes to take effect.

#### 4.1.3.3. HII

1. Go into the BIOS setup.
2. Chelsio HII should be listed as **Chelsio T5/T6** as shown below. Highlight it and press *[Enter]*.

If Chelsio T5/T6 is not listed,


- Load the Chelsio uEFI driver as mentioned in the [Loading uEFI driver](#) section.
- Flash the Option ROM and Firmware as mentioned in the [drvcfg](#) section.

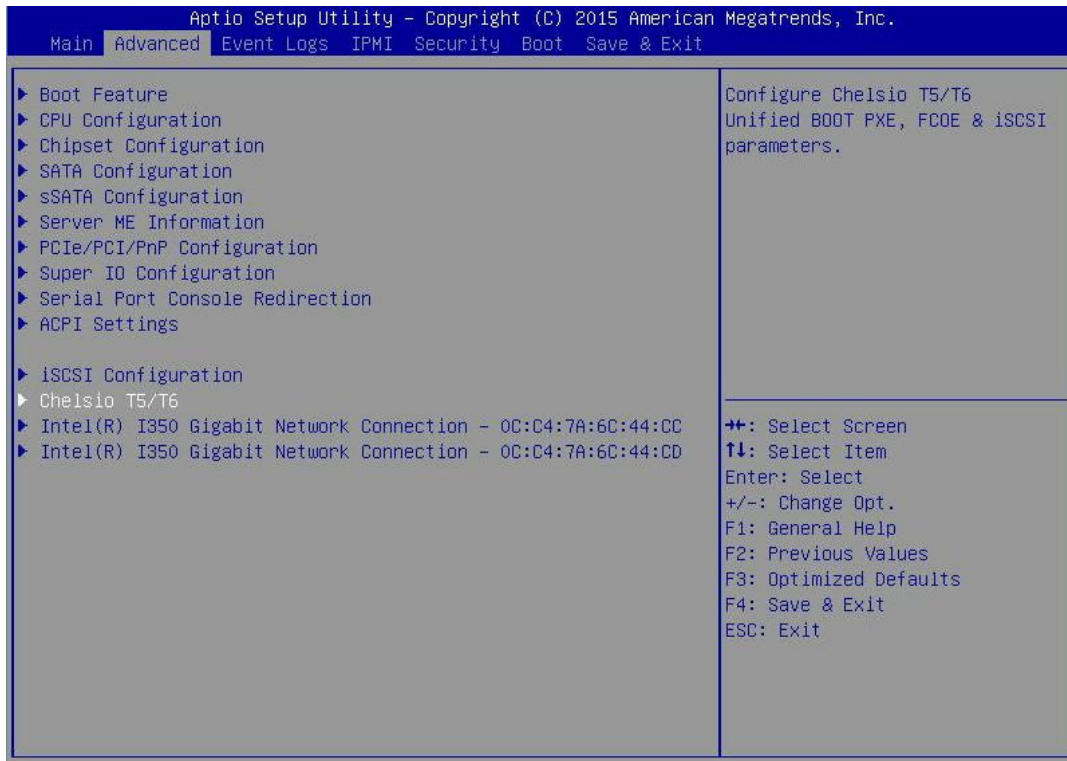

3. Highlight the Chelsio adapter to be configured and press *[Enter]*.



4. Highlight **Flash Utility** and press *[Enter]*.

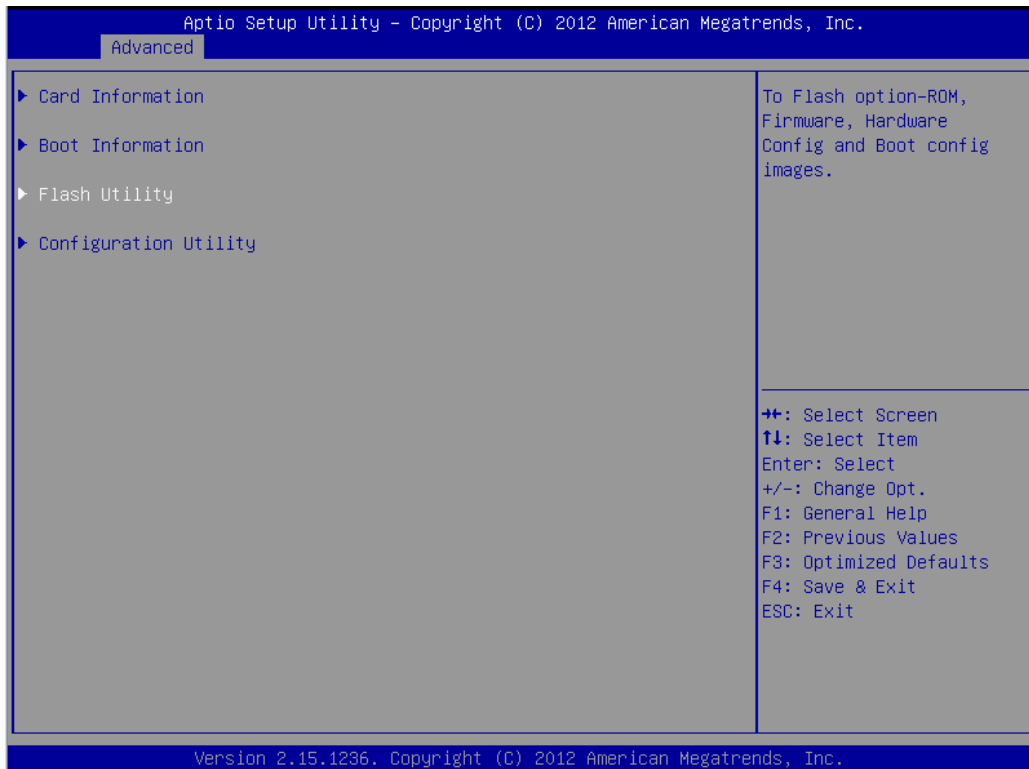

5. Erase or update firmware using the methods explained below:
  - a. **Erase existing firmware**
    - i. Select [Erase] as Flash Operation
    - ii. Select [FW File] as Flash File Type
    - iii. Select Update/Erase
    - iv. Press [Y] to confirm
  - b. **Update firmware**
    - i. Select [Update] as Flash Operation
    - ii. Select [FW File] as Flash File Type
    - iii. Enter full path to the firmware file for Enter File Name, e.g., CHELSIO\t6fw-1.16.29.0.bin.
    - iv. Press [Enter]
    - v. Select Update/Erase
    - vi. Press [Y] to confirm
6. Similarly, you can use the above method to update/erase Option ROM (*cubt4.bin*) and boot configuration (*boot.cfg*) present in the *CHELSIO* directory.
7. For multiple adapters in the system, repeat the above steps to update/flash the firmware, Option ROM, and boot configuration on all the adapters.
8. Reboot the machine for changes to take effect.

### 4.1.3.4. Firmware Management Protocol (FMP)

HP machines support the Firmware Management Protocol (FMP) interface, in addition to HII. This can be used to update the Option ROM on Chelsio adapters.

- **Enabling FMP**

1. Ensure that the Chelsio uEFI driver is loaded correctly as mentioned in the [Loading uEFI driver](#) section.
2. Run the command `fwupdate -l` and Chelsio T6 adapter should be listed as shown below:

```
FS1:\CHELSIO> fwupdate -l
* [BIOS] System ROM - U20 v2.20 (05/05/2016)
* [RAID.Slot.2.1]Slot 2 : Smart HBA H240 Controller - U2.52_B0
* [NIC.LOM.1.3]Embedded LOM 1 : HP Ethernet 1Gb 2-port 361i Adapter - NIC - 1.1067.0
* [NIC.Slot.3.1]Slot 3 : Chelsio T6 Controller - NIC -
```

- **Upgrading Firmware**

- **Using CLI**

1. Use the adapter's device name to update the firmware:

```
FS1:\CHELSIO\> fwupdate -d <device_name> -f cubt4.bin
```

Example:

```
FS1:\CHELSIO\> fwupdate -d NIC.Slot.3.1 -f cubt4.bin
Loading firmware file 'cubt4.bin'. It might take several minutes.
Current Firmware Version is .
Continue with firmware update? (y/n):y
Firmware update completed successfully.
```

2. Reboot machine for changes to take effect.

- **Using FMP**

1. Reboot the system and press *F9* to access **System Utilities**
2. Go to **Embedded Applications > Firmware Update > Chelsio T6 Controller**

```
System Utilities
Embedded Applications + Select a device to update + Firmware Update
Slot 3 : Chelsio T6 Controller - NIC
▶ Select a firmware file
Selected firmware file:
Current Firmware Version:
Image Description (Chelsio Option ROM package)
Start firmware update
```

3. Highlight **Select a firmware file** option and hit [Enter].
4. Select the USB flash drive which contains the latest Option ROM and press [Enter].

```
File Explorer

Press ENTER to select.

▶ [SSS_X64FRE_] Rear USB 1 : SanDisk Ultra
  [ANACONDA] Embedded CD/DVD ROM : Dynamic Smart Array B140i - SATA Optical Drive 1
  [GPT] Slot 2 : Smart HBA H240 Controller
```

5. Select **Option ROM** file *cubt4.bin* and press [Enter].

```
File Explorer

\ [SSS_X64FRE_] Rear USB 1 : SanDisk Ultra \ <CHELSIO>

Press ENTER to select.

bootcfg
cfut4.exe
ChelsioUD.efi
▶ cubt4.bin
```

The file should show up in the **Selected firmware file** field.

```
System Utilities

Embedded Applications → Select a device to update → Firmware Update

Slot 3 : Chelsio T6 Controller - NIC

Select a firmware file
▶ Selected firmware file: cubt4.bin
Current Firmware Version:
Image Description: [Chelsio Option ROM package]

Start firmware update
```

6. Select **Start firmware update** and press [Enter].

```

System Utilities
Embedded Applications → Select a device to update → Firmware Update

Slot 3 : Chelsio T6 Controller - NIC

Select a firmware file
Selected firmware file:          cubt4.bin
Current Firmware Version:       4.2.0.1
Image Description                 [Chelsio Option ROM package]

▶ Start firmware update

```

7. After **Firmware update completed successfully** prompt appears, reboot the machine for changes to take effect.

```

System Utilities
Embedded Applications → Select a device to update → Firmware Update

Slot 3 : Chelsio T6 Controller - NIC

Select a firmware file
Selected firmware file:          cubt4.bin
Current Firmware Version:       4.2.0.1
Image Description                 [Chelsio Option ROM package]

▶ Start firmware update

Firmware update completed successfully.

```

#### 4.1.4. cxgbtool (OS Level)

Follow the steps mentioned below to flash the Option ROM onto Chelsio adapters using *cxgbtool* utility:

1. If not done already, install the Network driver and *cxgbtool*.

```
[root@host~]# cd ChelsioUwire-x.x.x.x
[root@host~]# make install
```

2. Load the Network driver.

```
[root@host~]# modprobe cxgb4
```

3. Delete any previous version of Option ROM flashed onto the adapter.

```
[root@host~]# cxgbtool ethX loadboot clear
```

- Flash the Option ROM onto the Chelsio adapter.

```
[root@host~]# cd ChelsioUwire-x.x.x.x/Uboot/OptionROM/  
[root@host~]# cxgbtool ethX loadboot cubt4.bin
```

- Flash the default boot configuration onto the adapter.

```
[root@host~]# cd ChelsioUwire-x.x.x.x/Uboot/OptionROM/  
[root@host~]# cxgbtool ethX loadboot-cfg boot.cfg
```

- For multiple adapters in the system, repeat the steps from 3 through 5 to update/flash the Option ROM and boot configuration on all the adapters.
- Reboot the system for changes to take effect.


## 4.2. Configuring PXE Server

---

The following components are required to configure a PXE Server:

- DHCP Server
- TFTP Server

PXE server configuration steps for different operating systems can be found on the following links:

 **Note** *Chelsio Communications does not take any responsibility regarding contents given in below mentioned links. They are provided for example purposes only.*

### Linux

- [https://docs.redhat.com/en/documentation/red\\_hat\\_enterprise\\_linux/8/html/automatically\\_installing\\_rhel/preparing-for-a-network-install\\_rhel-installer](https://docs.redhat.com/en/documentation/red_hat_enterprise_linux/8/html/automatically_installing_rhel/preparing-for-a-network-install_rhel-installer)
- [http://www.howtoforge.com/ubuntu\\_pxe\\_install\\_server](http://www.howtoforge.com/ubuntu_pxe_install_server)

### Windows

- <http://technet.microsoft.com/en-us/library/cc771670%28WS.10%29.aspx>
- <http://tftpd32.jounin.net/> (Use port # 67, set PXE option and provide bootable file name in settings)
- <http://unattended.sourceforge.net/pxe-win2k.html>

## 4.3. PXE Boot Process

Before proceeding, ensure that the Chelsio adapter has been flashed with the provided firmware and Option ROM (See [Flashing Firmware and option ROM](#)).

### 4.3.1. Legacy PXE Boot

1. After configuring the PXE server, make sure the PXE server works. Then reboot the client machine.
2. Press `[Alt+C]` when the message to configure the Chelsio adapters appears on the screen.

```
Chelsio Unified Boot BIOS
Copyright (C) 2003-2016 Chelsio Communications
Press <Alt-C> to Configure T5/T6 Card(s). Press <Alt-S> to skip BIOS.
```

3. The configuration utility will appear as below:

```
Chelsio adapters in the system

1. Bus:81 Dev:00 T6225-CR
```

Choose the adapter on which you flashed the option ROM image and press `[Enter]`.

4. Enable the adapter BIOS using arrow keys if not already enabled And press `[Enter]`.

```
# 1: Chelsio T6 adapter at PCI Bus: 81 Device: 00

Adapter BIOS : ENABLED

Initialization platform : Both

Identify Ports


Boot Mode : Compatibility

EDD : 2.1


EBDA Relocation : PERMITTED
```

**Note** Use the default values for Boot Mode, EDD and EBDA Relocation parameters, unless instructed otherwise.

- Choose *PXE* from the list to configure and press *[Enter]*.

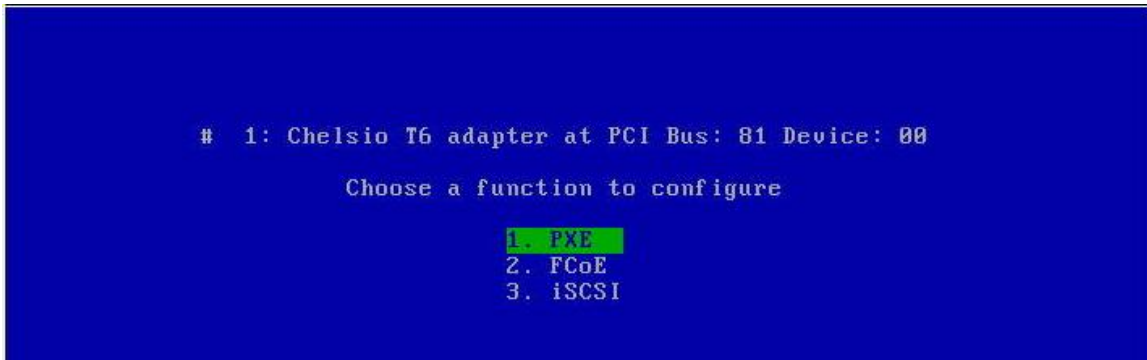

- Use the arrow keys to highlight the appropriate function among the supported NIC functions and press *[Enter]* to select.

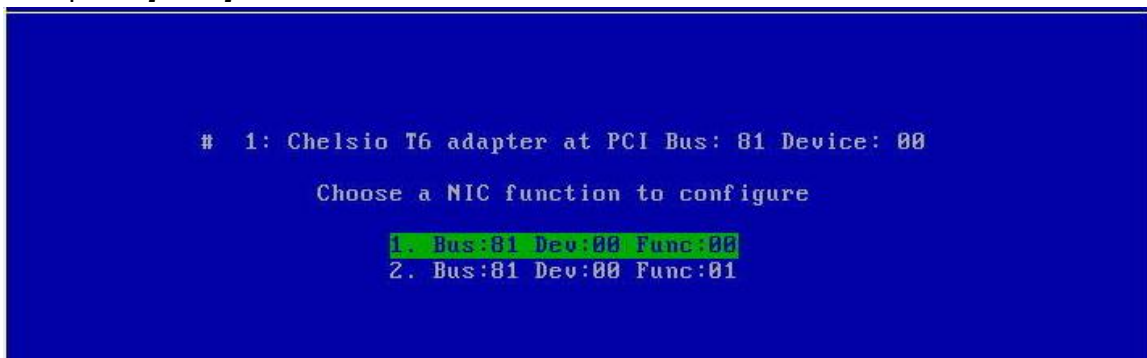

- Enable NIC function bios if not already enabled.




Choose the boot port to try the PXE boot. It is recommended only to enable functions and ports that are going to be used. Note that enabling NIC Func 00 will enable port 0 for PXE, enabling NIC Func 01 will enable port 1, and so on for the NIC function.


- Press **[F10]** or **[Esc]** and then **[Y]** to save configuration changes.



- Reboot the system.
- Allow the Chelsio option ROM to initialize and setup PXE devices. **DO NOT PRESS ALT-S** to skip Chelsio option ROM.

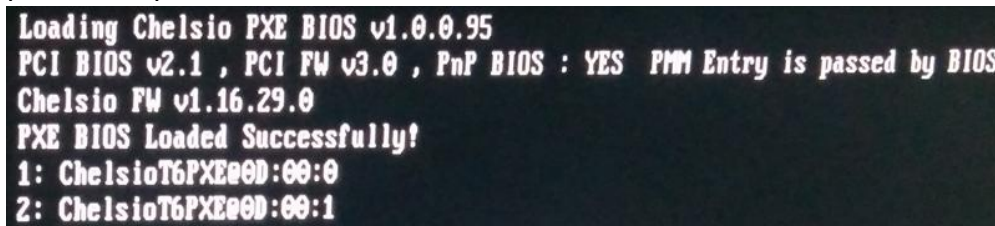

- In the system setup, choose any of the Chelsio PXE devices as the first boot device.

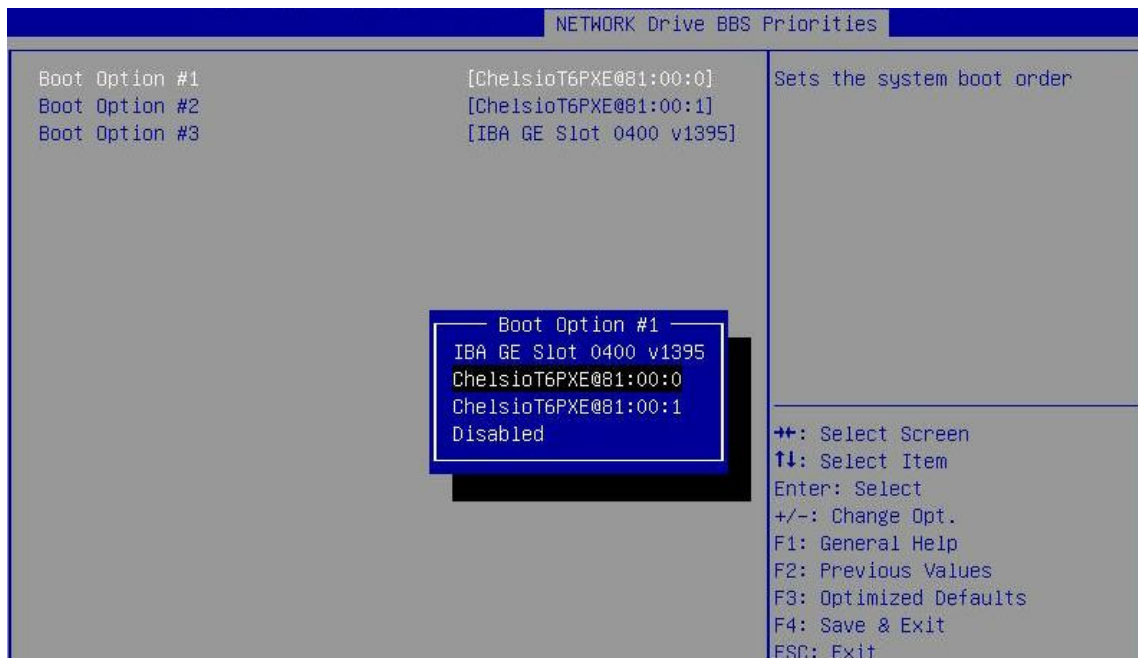

- Reboot. **DO NOT PRESS ALT-S** to skip Chelsio option ROM, during POST.
- Press **[F12]** key when prompted to start PXE boot.


### 4.3.2. uEFI PXE Boot

- Important**
  - Only uEFI v2.3.1, v2.4 and v2.5 supported.
  - Any other uEFI version is **NOT SUPPORTED** and may render your system unusable.

#### 4.3.2.1. HII

This section describes the method to configure and use Chelsio uEFI PXE interfaces using HII.

- i. Reboot the system and go into the BIOS setup.
- ii. Chelsio HII should be listed as **Chelsio T5/T6**. Highlight it and press *[Enter]*.

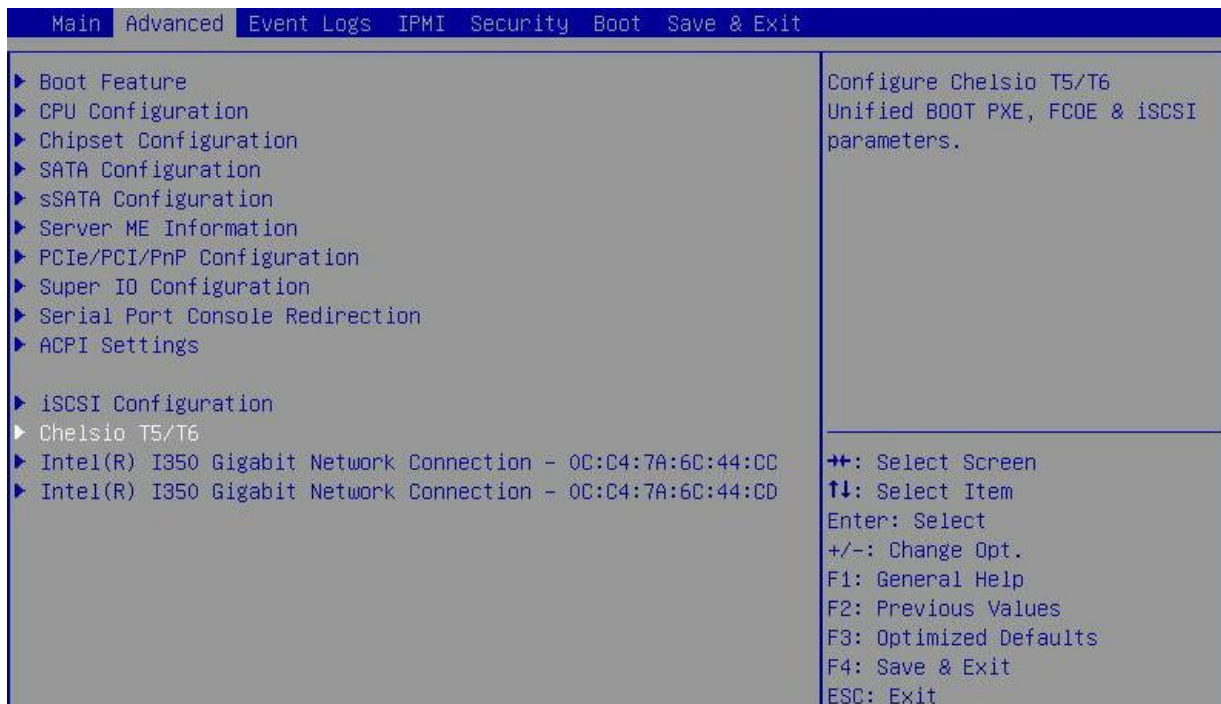

**Note** Ensure that the Chelsio uEFI driver is loaded correctly as mentioned in [Loading uEFI driver](#) section.


- iii. Select the Chelsio adapter to be configured and press *[Enter]*.



- iv. Select **Configuration Utility** and press *[Enter]*.




- v. Enable adapter BIOS if not already enabled.

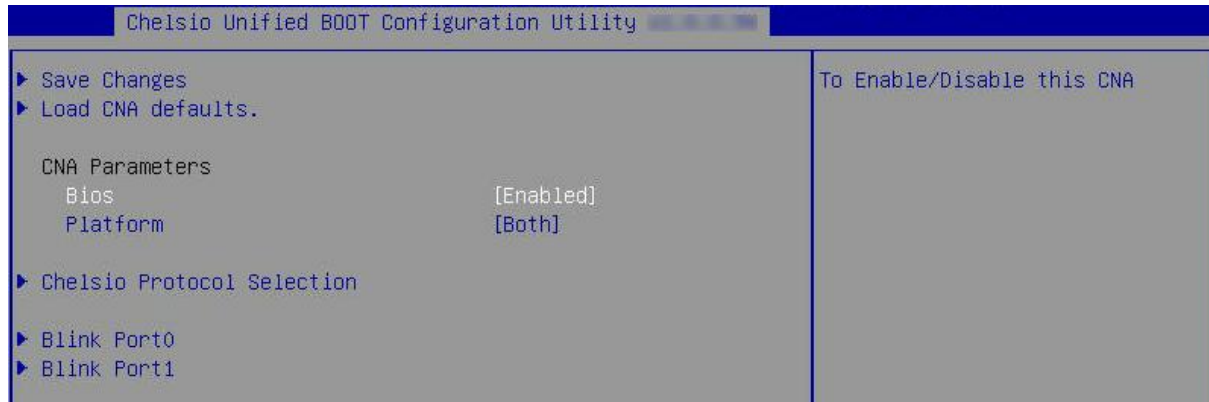


**Note** *It is highly recommended that you use the **Save Changes** option every time a parameter/option is changed.*


- vi. Select **Chelsio Protocol Selection** and press *[Enter]*.

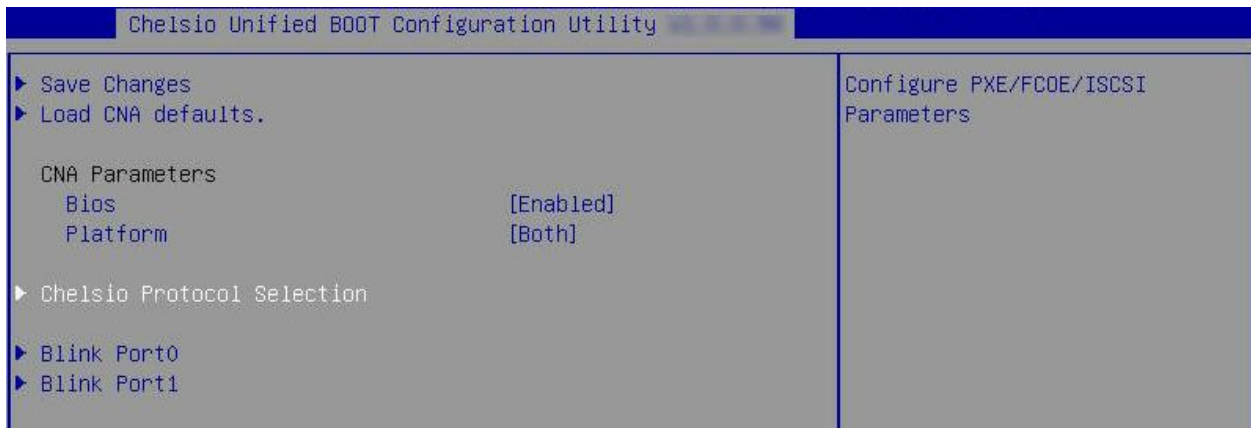


vii. Select **PXE** and press *[Enter]*.

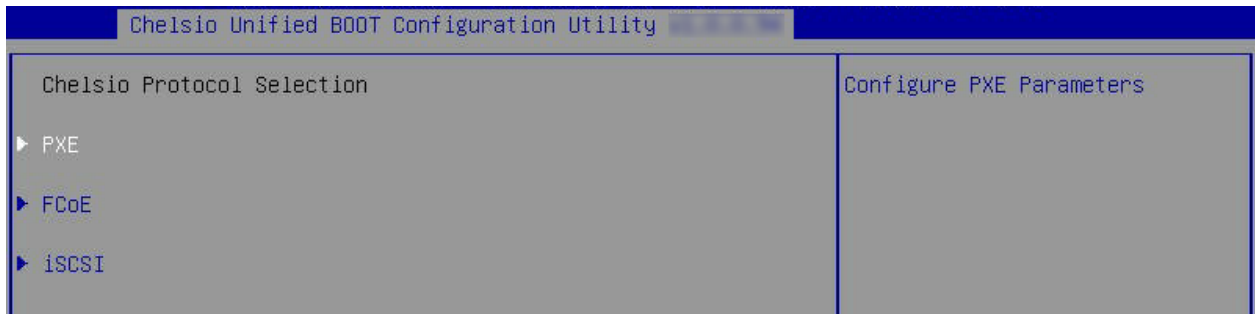


viii. Choose the boot port to try PXE boot. It is recommended to enable only those functions and ports which are going to be used. Note that enabling PXE Function 0 will enable port 0 for PXE, enabling PXE Function 1 will enable port 1, and so on, for the NIC function.

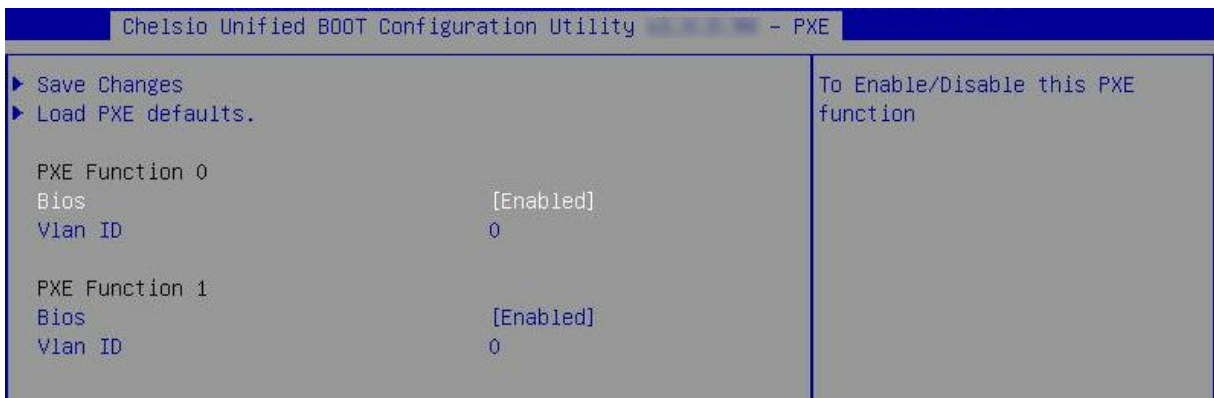

ix. Select **Save Changes** and press *[Enter]*.

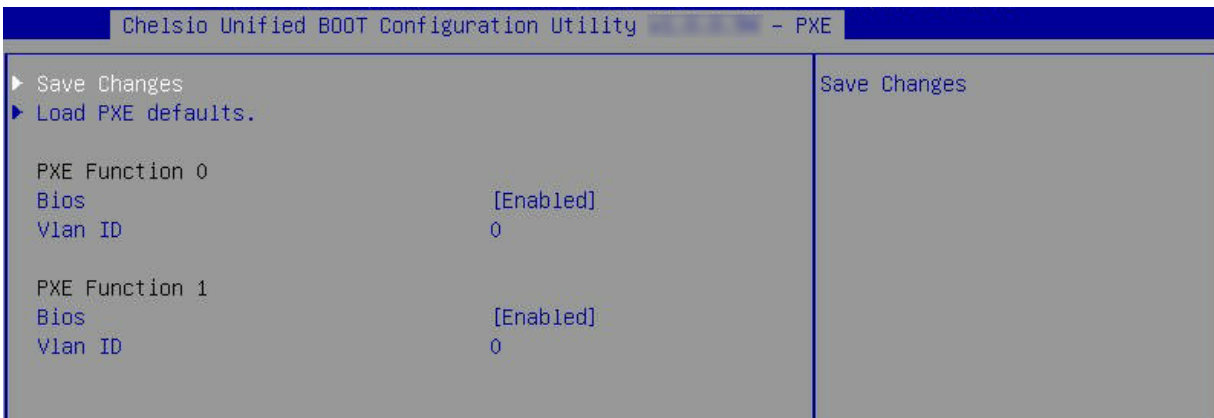

- x. Reboot the system and in BIOS, choose any of the available Chelsio PXE devices.

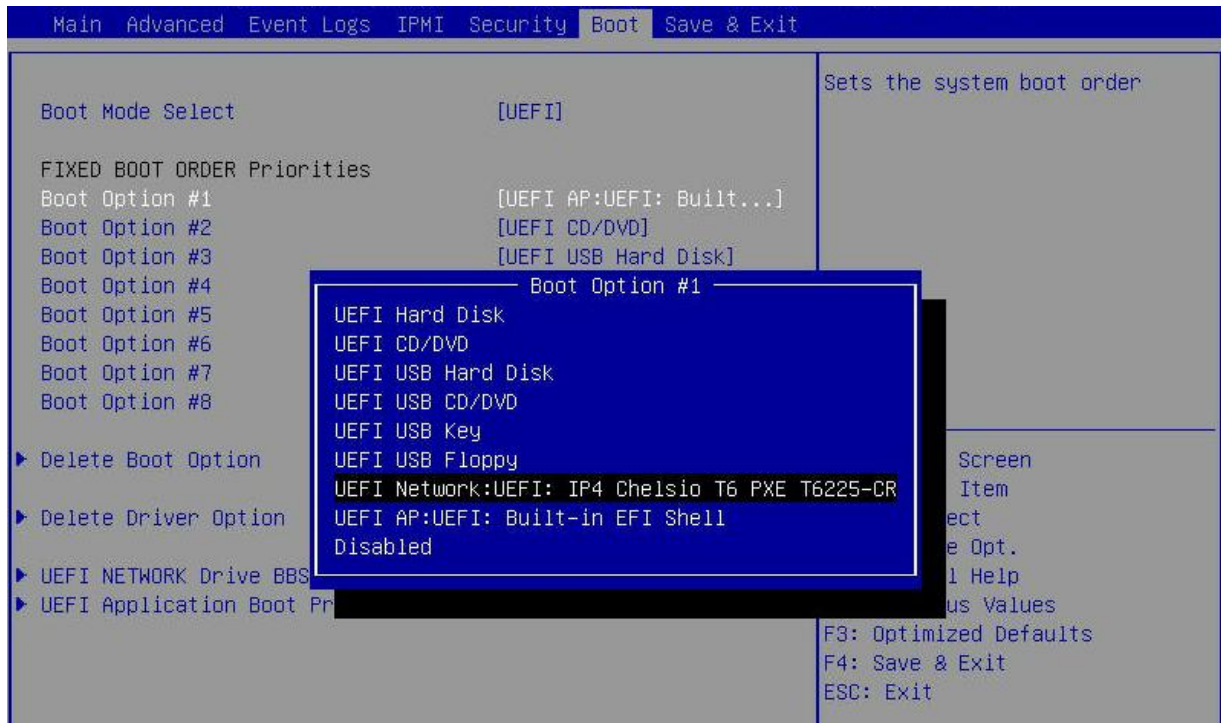

- xi. Reboot and press `[F12]` key when prompted to start PXE boot.


### 4.3.2.2. drvcfg

This section describes the method to configure and use Chelsio uEFI PXE interfaces using `drvcfg`.


1. Boot the system into EFI shell.
2. Run the following command to launch the Unified Boot Setup utility.

```
fs0:\> drvcfg -s_
```

3. Choose the Chelsio adapter which needs to be configured.

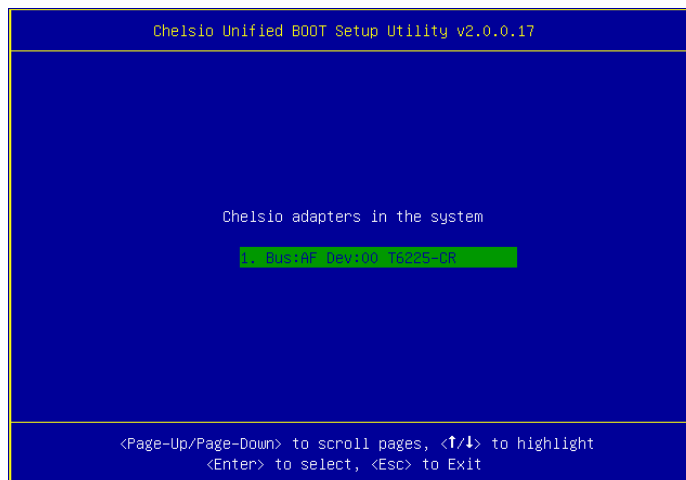

4. Highlight **Enter config utility** and press *[Enter]*.

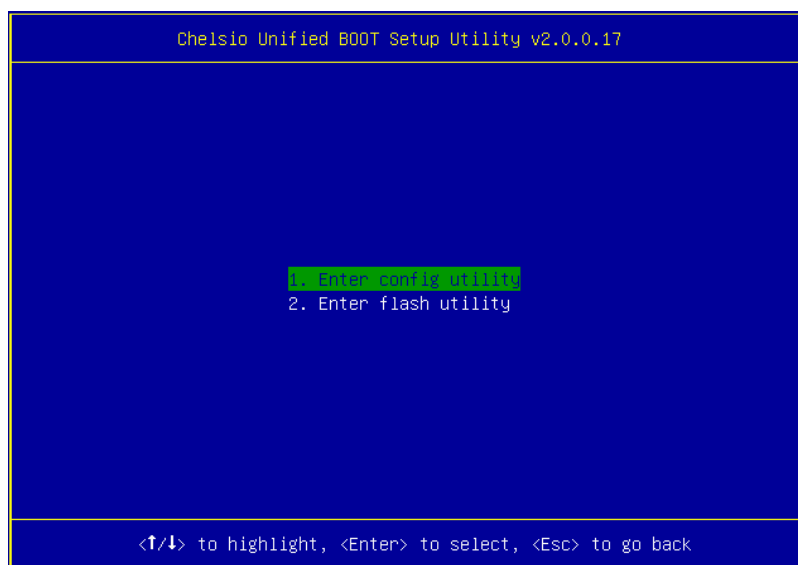

5. Further configuration steps are similar from step 4 of the [Legacy PXE Boot](#) section.

## 4.4. FCoE Boot Process

Before proceeding, ensure that the Chelsio CNA has been flashed with the provided firmware and option ROM (See [Flashing firmware and option ROM](#)).

### 4.4.1. Legacy FCoE Boot

1. Reboot the system.
2. Press `[Alt+C]` when the message to configure the Chelsio adapters appears on the screen.

```
Chelsio Unified Boot BIOS
Copyright (C) 2003-2016 Chelsio Communications
Press <Alt-C> to Configure T5/T6 Card(s). Press <Alt-S> to skip BIOS.
```

3. The configuration utility will appear as below:

```
Chelsio adapters in the system
1. Bus:04 Dev:00 T520-CR
```

Choose the adapter on which you flashed the option ROM image and press `[Enter]`.

4. Enable the adapter BIOS if not already enabled and press `[ENTER]`.

```
# 1: Chelsio T5 adapter at PCI Bus: 04 Device: 00

Adapter BIOS : ENABLED

Initialization platform : Both

Identify Ports

Boot Mode : Compatibility


EDD : 2.1

EBDA Relocation : PERMITTED
```




**Note** Use the default values for Boot Mode, EDD and EBDA Relocation parameters, unless instructed otherwise.


5. Choose FCoE from the list to configure and press *[Enter]*.

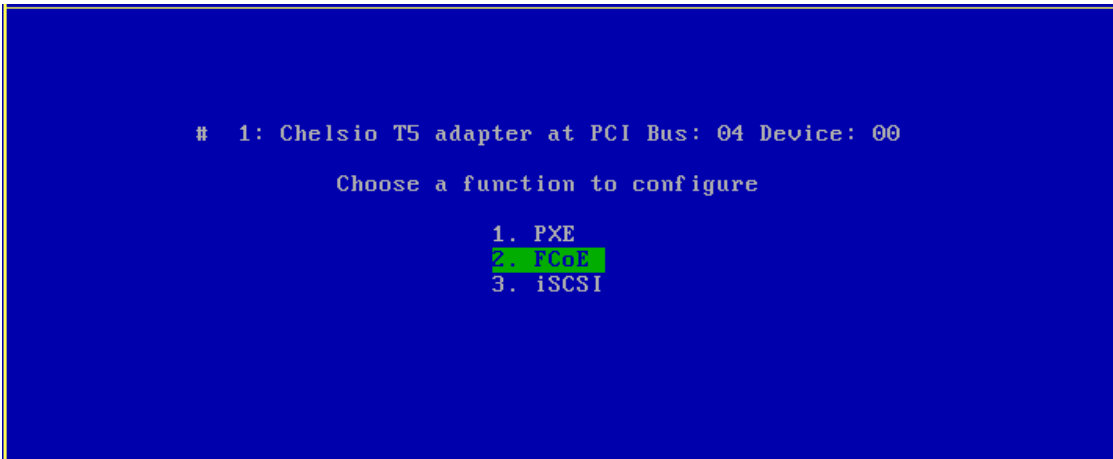

6. Choose the first option, **Configure function parameters**, from the list of parameter type and press *[Enter]*.

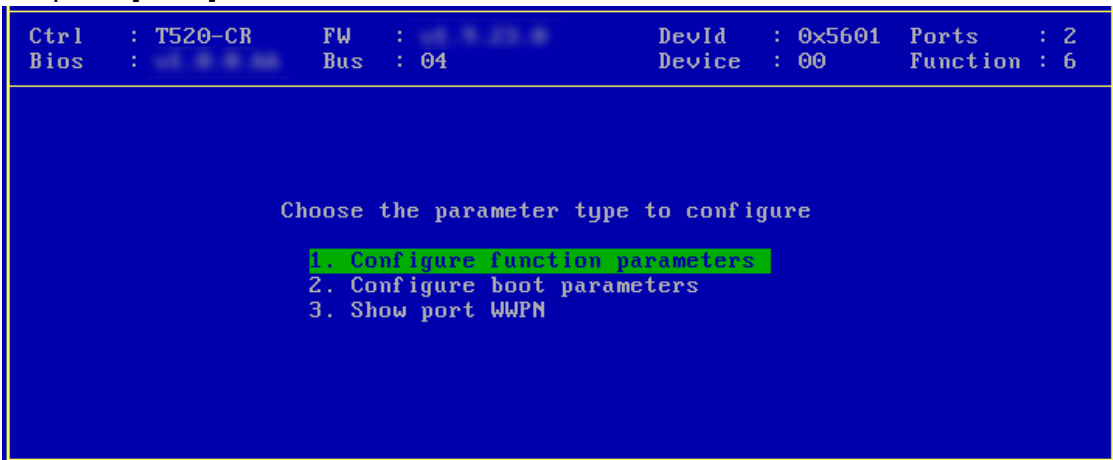

7. Enable FCoE BIOS if not already enabled.

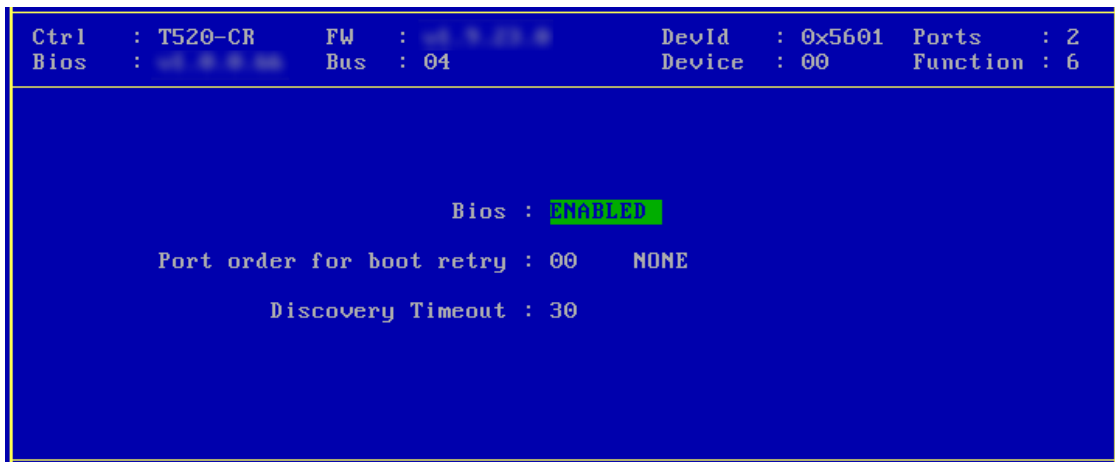

8. Choose the order of the ports to discover FCoE targets.

```

Ctrl  : T520-CR   FW   : 0.0.0.0      DevId  : 0x5601  Ports   : 2
Bios   :          Bus  : 04      Device : 00      Function: 6

                                     Bios : ENABLED

Port order for boot retry : 00  31
Discovery Timeout : 30
    
```

9. Set discovery timeout to a suitable value. Recommended value is >= 30.

```

Ctrl  : T520-CR   FW   : 0.0.0.0      DevId  : 0x5601  Ports   : 2
Bios   :          Bus  : 04      Device : 00      Function: 6

                                     Bios : ENABLED

Port order for boot retry : 00  01
Discovery Timeout : 33
    
```

10. Press *[F10]* or *[Esc]* and then *[Y]* to save the configuration.

```

Ctrl  : T520-CR   FW   : 0.0.0.0      DevId  : 0x5601  Ports   : 2
Bios   :          Bus  : 04      Device : 00      Function: 6

Port order for boot retry : 00  01

                                     WARNING!
                                     Do you want to save the configuration?
                                     <Y>=Yes, <N>=No, <C>=Cancel
    
```

11. Choose **Configure boot parameters**.

```

Ctrl  : T520-CR   FW   :          DevId  : 0x5601  Ports   : 2
Bios  :          Bus  : 04          Device : 00     Function: 6
-----
                                Choose the parameter type to configure

                                1. Configure function parameters
                                2. Configure boot parameters
                                3. Show port WWPN
    
```

12. Select the first boot device and press *[Enter]* to discover FC/FCoE targets connected to the switch. Wait till all reachable targets are discovered.

```

Ctrl  : T520-CR   FW   :          DevId  : 0x5601  Ports   : 2
Bios  :          Bus  : 04          Device : 00     Function: 6
-----
                                Saved boot device

                                1. Unused WWPN: 0000000000000000 LUN:0000000000000000
                                2. Unused WWPN: 0000000000000000 LUN:0000000000000000
                                3. Unused WWPN: 0000000000000000 LUN:0000000000000000
                                4. Unused WWPN: 0000000000000000 LUN:0000000000000000
    
```

13. List of discovered targets will be displayed. Highlight a target using the arrow keys and press *[Enter]* to select.

```

Ctrl  : T520-CR   FW   :          DevId  : 0x5601  Ports   : 2
Bios  :          Bus  : 04          Device : 00     Function: 6
CurPort: 0      WWPN : 5000743288536080 BootDev#: 0      Target#  : 0
-----
                                List of discovered targets

                                1. WWPN: 500A098289A97C6B
    
```

14. From the list of LUNs displayed for the selected target, choose one on which operating system has to be installed. Press *[Enter]*.

```

Ctrl  : T520-CR      FW   :          DevId  : 0x5601  Ports   : 2
Bios  :             Bus  : 04      Device : 00      Function: 6
CurPort: 0         WWPN : 5000743288536080 BootDev#: 0      Target# : 0

```

---

List of LUNs present on the target

```

1. LUN: 0000000000000000 NETAPP 35.0003 GB
2. LUN: 0002000000000000 NETAPP  1.0035 GB
3. LUN: 0003000000000000 NETAPP  1.0035 GB
4. LUN: 0004000000000000 NETAPP  1.0035 GB
5. LUN: 0005000000000000 NETAPP  1.0035 GB
6. LUN: 0006000000000000 NETAPP  1.0035 GB
7. LUN: 0007000000000000 NETAPP  1.0035 GB
8. LUN: 0008000000000000 NETAPP  1.0035 GB

```

```

Ctrl  : T520-CR      FW   :          DevId  : 0x5601  Ports   : 2
Bios  :             Bus  : 04      Device : 00      Function: 6

```

---

Saved boot device

```

1. Used  WWPN: 500A090289AB7CAB LUN: 0000000000000000
2. Unused WWPN: 0000000000000000 LUN: 0000000000000000
3. Unused WWPN: 0000000000000000 LUN: 0000000000000000
4. Unused WWPN: 0000000000000000 LUN: 0000000000000000

```

15. Press *[F10]* or *[Esc]* and then *[Y]* to save the configuration.

```

Ctrl  : T520-CR      FW   :          DevId  : 0x5601  Ports   : 2
Bios  :             Bus  : 04      Device : 00      Function: 6

```

**WARNING!**

Do you want to save the configuration?

<Y>=Yes, <N>=No, <C>=Cancel

```

1. Use
2. Unu
3. Unu
4. Unu


```

16. Reboot the machine.

- During POST, allow the Chelsio Option ROM to discover FCoE targets.

```
Installing Chelsio T5 Storage FCoE BIOS
PCI BIOSv3.0 PCI FWv2.1 PnP BIOS: YES PMM Entry is passed by BIOS
Bringing up link on PCI:04:00:6 Port 0 ... Done
Discovering FCoE Target(s) on PCI:04:00:6 Port 0 ... Done
sd(1): T520-CR          PCI:04:00:6 P(0) WWPN:500A098289AB7CAB Lun(00)
      NETAPP LUN          8030 35.0003 GB
Storage FCoE BIOS Installed Successfully!
```

- Enter BIOS setup and choose the FCoE disk discovered through the Chelsio adapter as the first boot device.

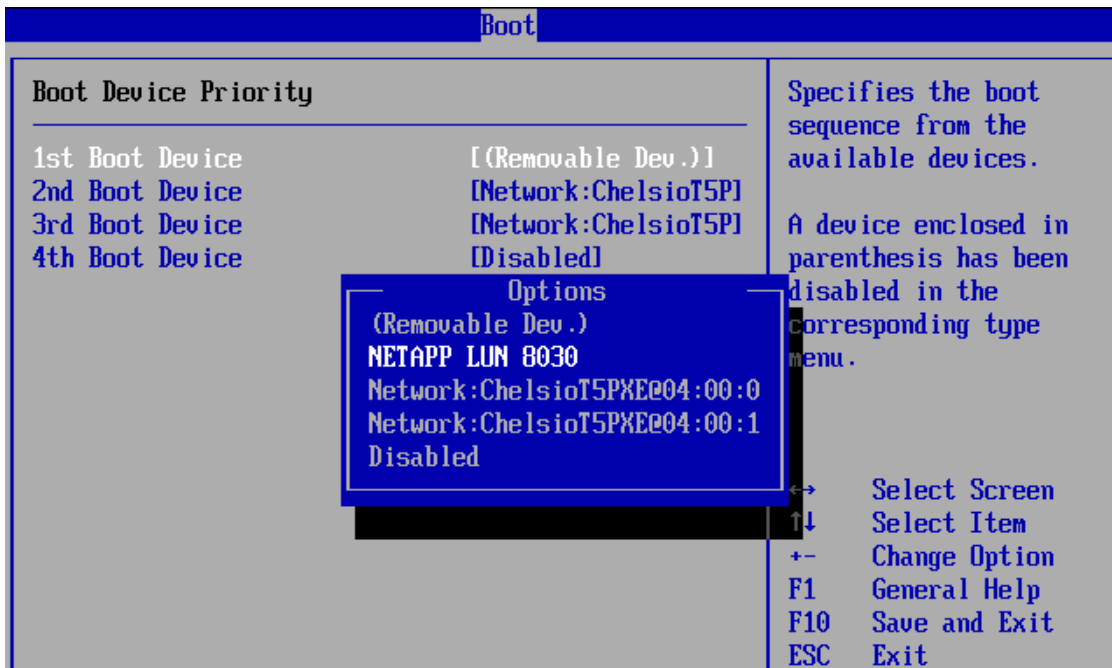

- Reboot and boot from the FCoE disk or install the required OS using PXE.

## 4.4.2. uEFI FCoE Boot


- Important**
  - Only uEFI v2.3.1, v2.4 and v2.5 supported.
  - Any other uEFI version is NOT SUPPORTED and may render your system unusable.

### 4.4.2.1. HII

This section describes the method to configure and use Chelsio uEFI FCoE interfaces using HII.

- Reboot the system and go into BIOS setup.

2. Select **Chelsio T5/T6** and press **[Enter]**.

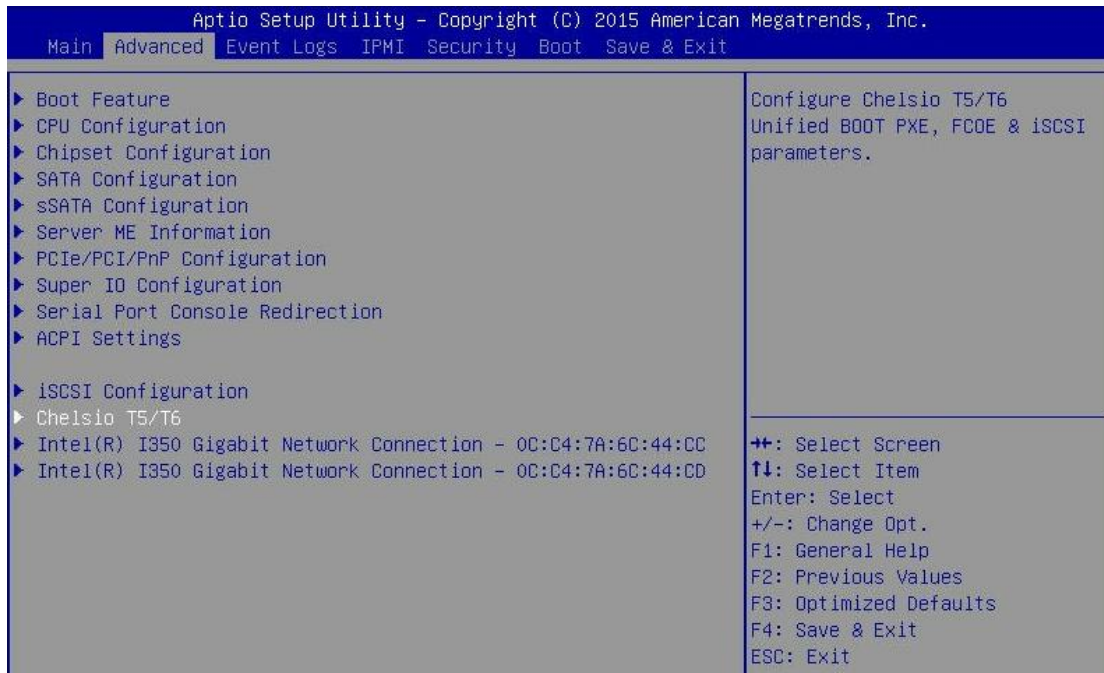

**Note** Ensure that the Chelsio uEFI driver is loaded correctly as mentioned in the [Loading uEFI driver](#) section.


3. Select the Chelsio adapter to be configured and press **[Enter]**.



4. Select **Configuration Utility** and press **[Enter]**.




5. Enable adapter BIOS if not already enabled.

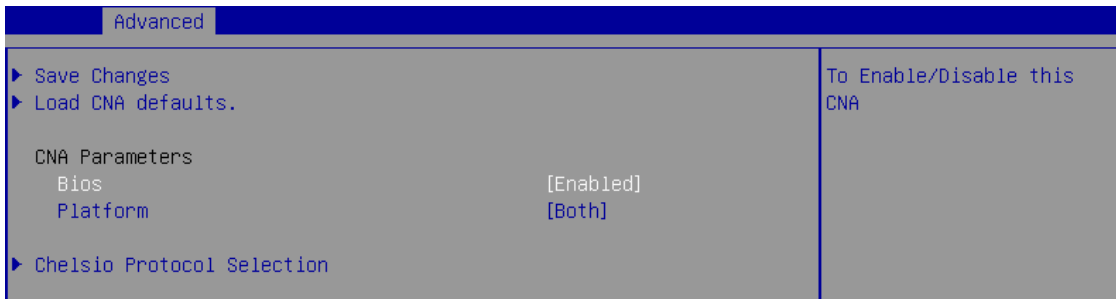

**Note** *It is highly recommended that you use the **Save Changes** option every time a parameter/option is changed.*


6. Select **Chelsio Protocol Selection** and press *[Enter]*.

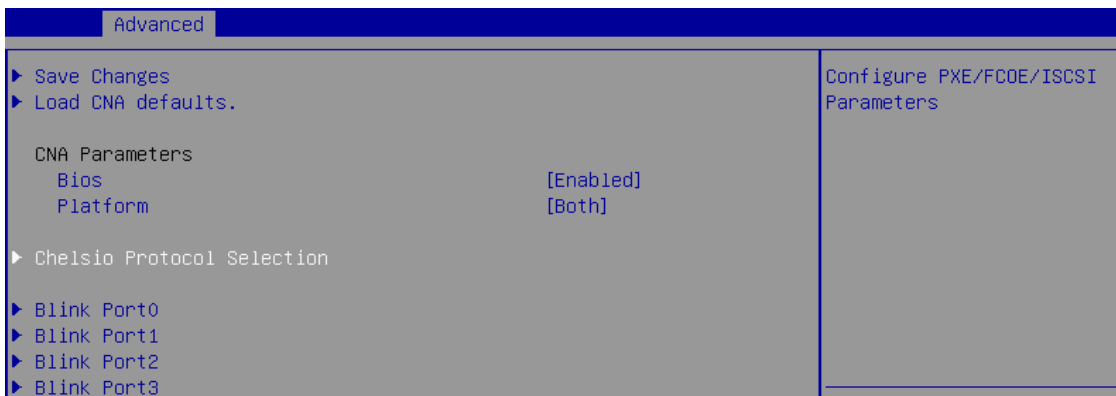


7. Select **FCoE** and press *[Enter]*.




8. Under **Function Parameters**, enable FCoE BIOS, if not already enabled.

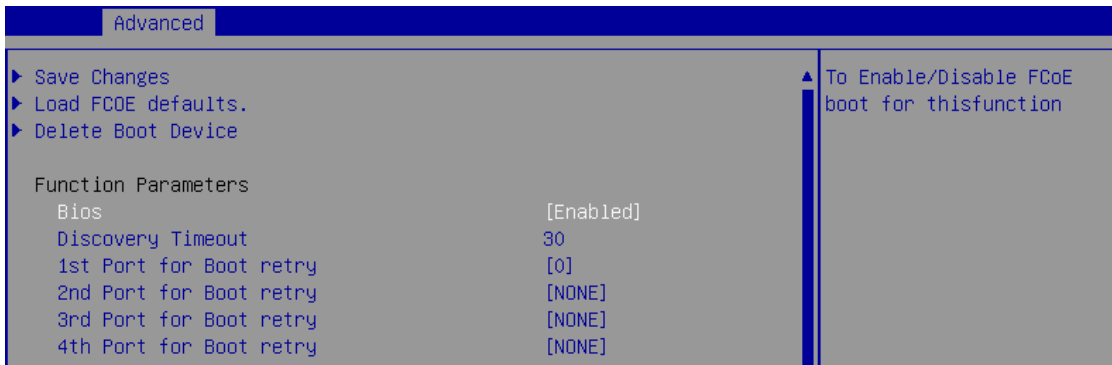


9. Set discovery timeout to a suitable value. The recommended value is  $\geq 30$ .

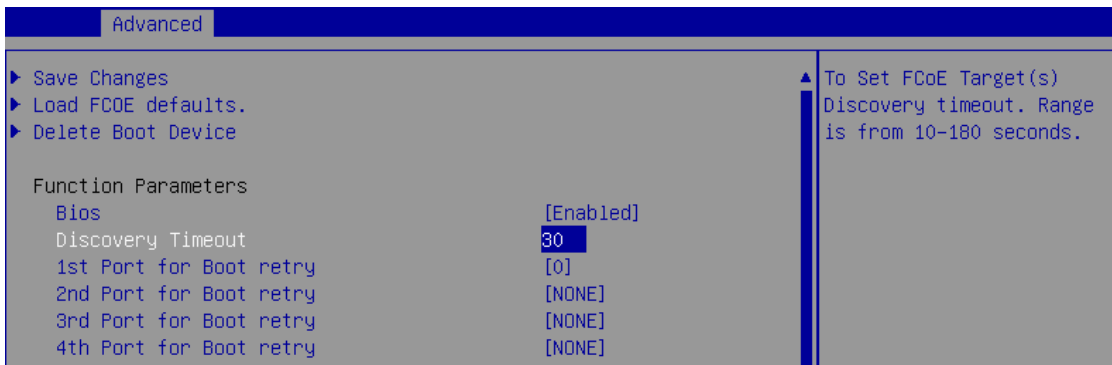


10. Choose the order of the ports to discover FCoE targets.

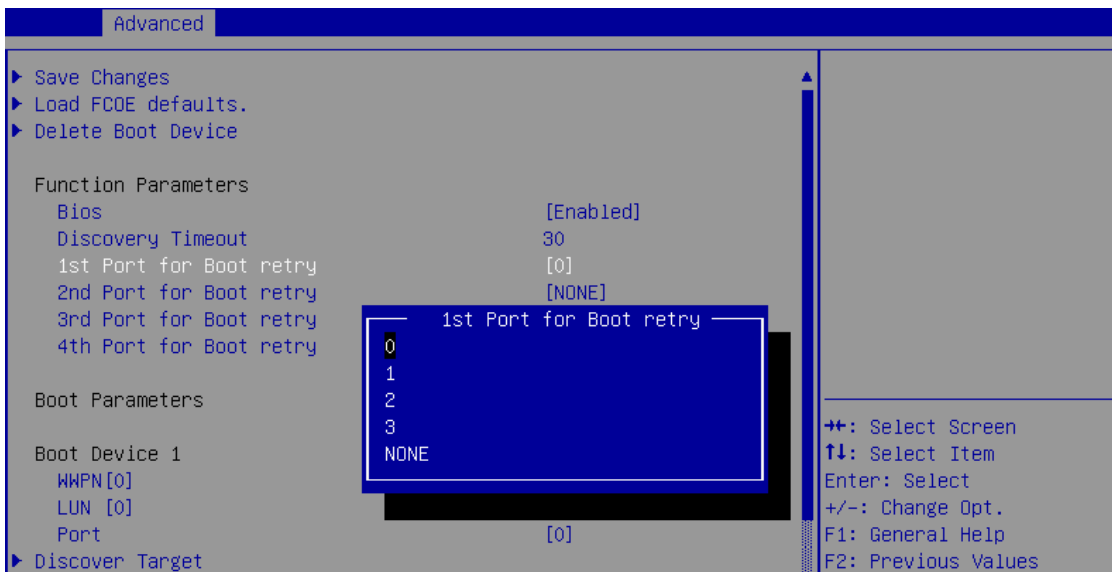


- Under the first boot device, select **Discover Target** and press *[Enter]* to discover FC/FCoE targets connected to the switch. Wait till all reachable targets are discovered.

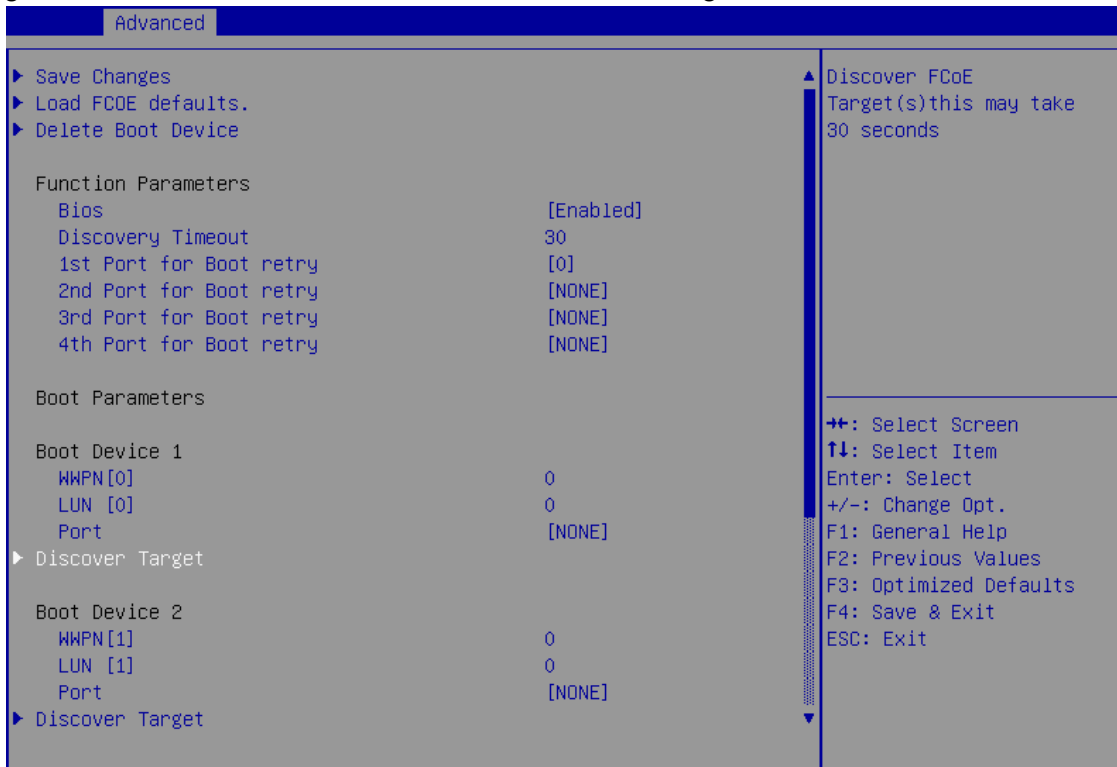


- List of discovered targets will be displayed. Highlight a target to select it and press *[Enter]*.

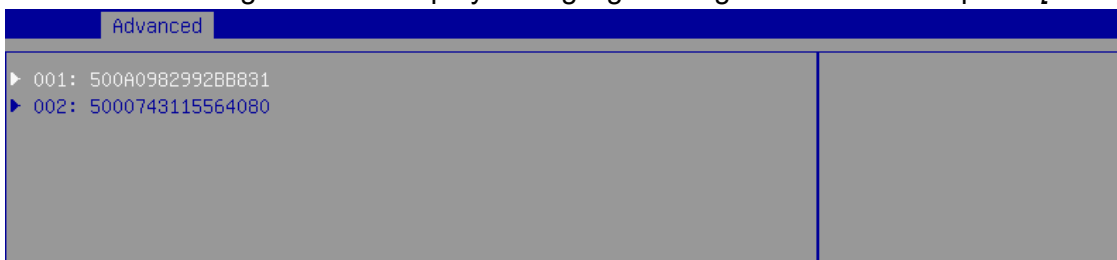


- List of LUNs for the selected target will be displayed. Highlight a LUN to select it and press *[Enter]*.

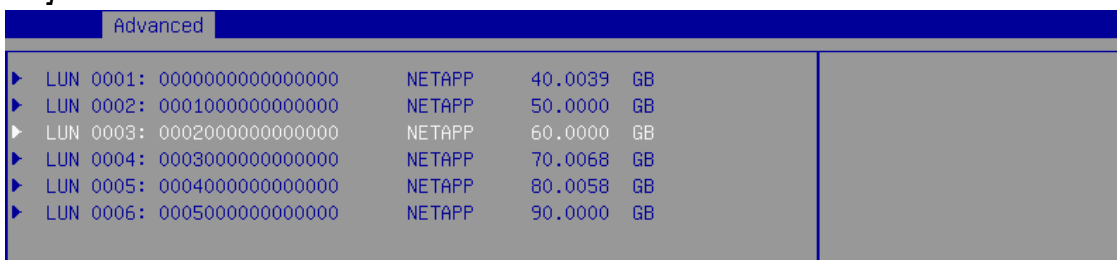

14. Select **Save Changes** and press *[Enter]*.

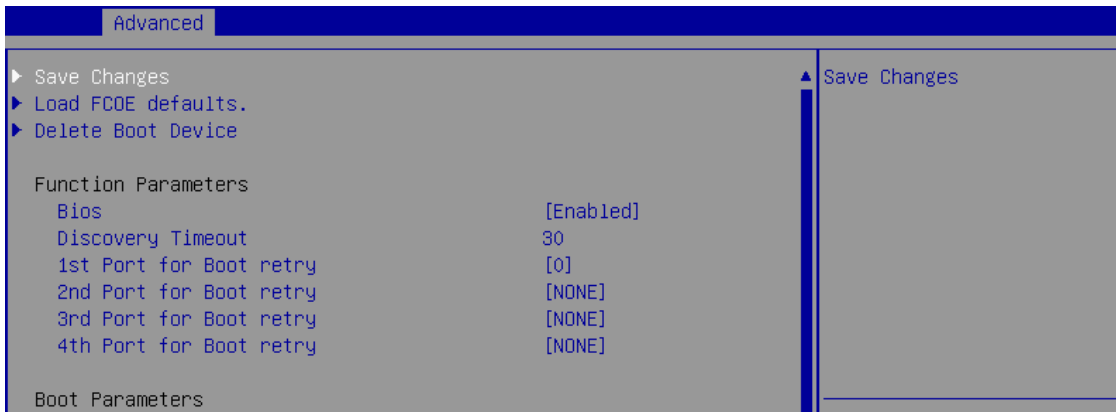

15. Reboot the system for changes to take effect.
16. The discovered LUN should appear in the **Boot Configuration** section and system BIOS section.

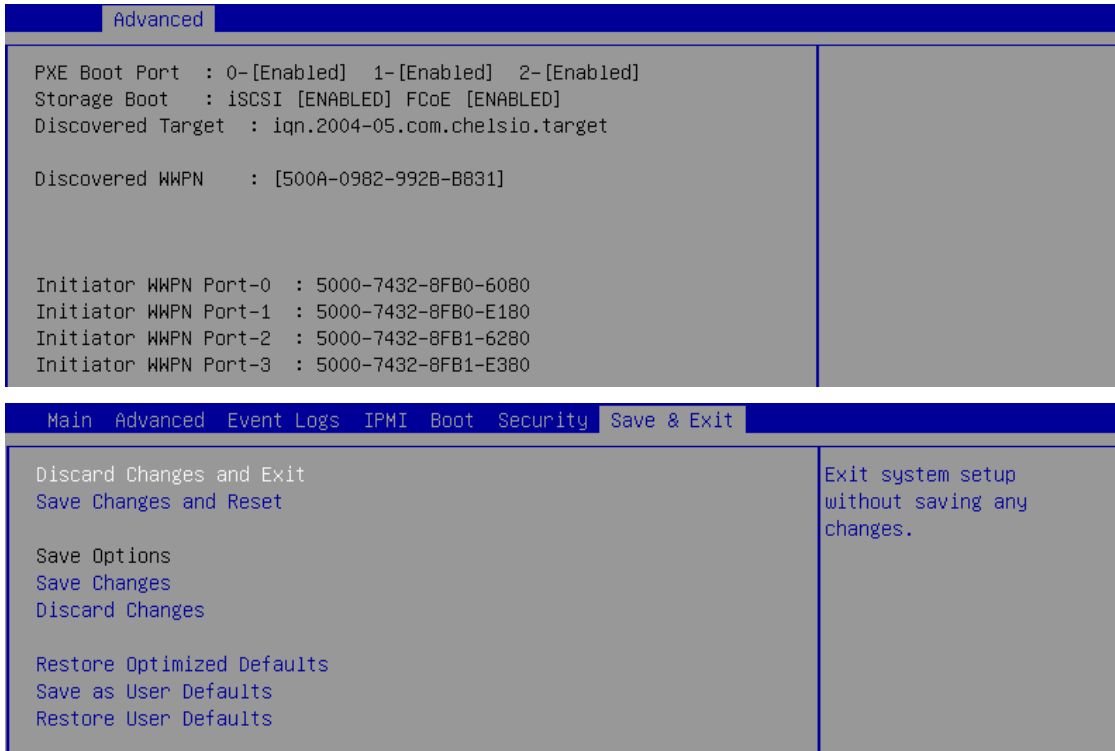

17. Select the LUN as the first boot device and exit from BIOS.
18. Either boot from the LUN or install the required OS.


### 4.4.2.2. drvcfg

This section describes the method to configure and use Chelsio uEFI FCoE interfaces using drvcfg.


1. Boot the system into EFI shell.
2. Run the following command to launch the configuration utility.

```
fs0:\> drvcfg -s_
```

3. Choose the Chelsio adapter on which needs to be configured.

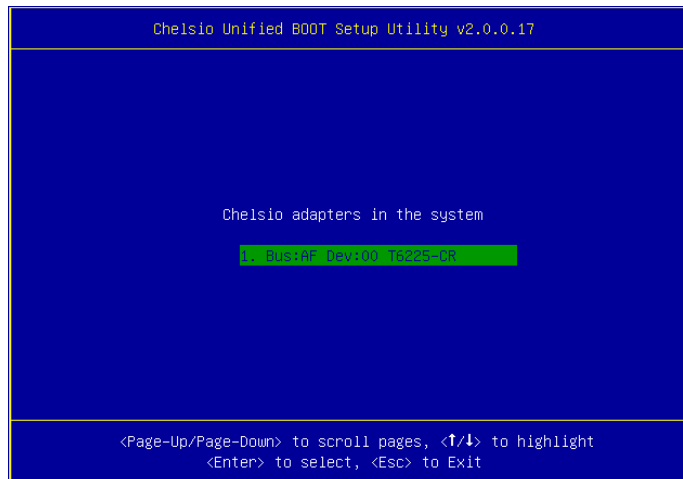

4. Highlight **Enter config utility** and press *[Enter]*.

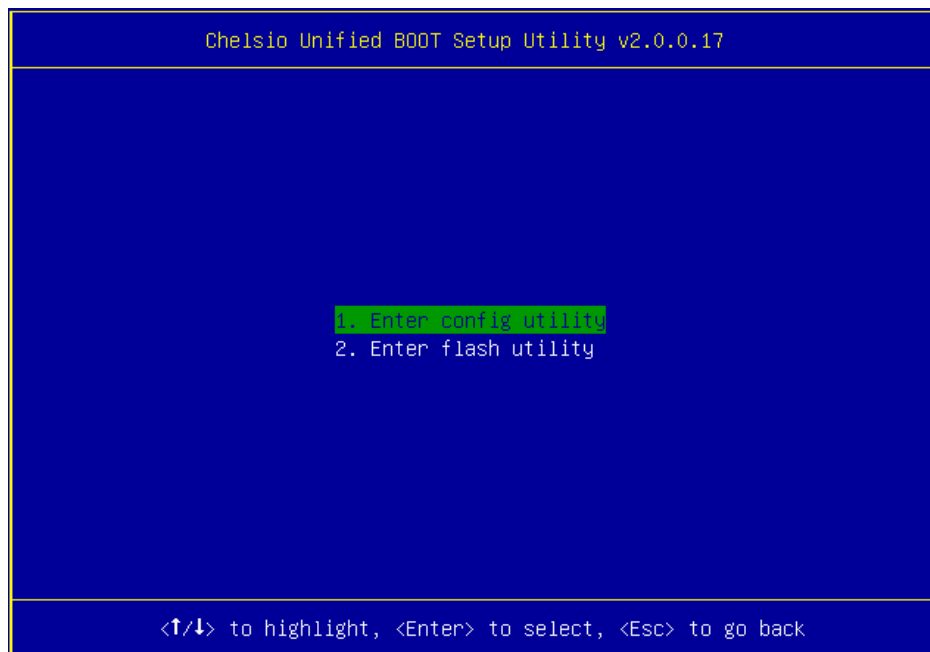

5. Further configuration steps are similar from step 4 of the [Legacy FCoE Boot](#) section.

## 4.5. iSCSI Boot Process

Before proceeding, ensure that the Chelsio CNA has been flashed with the provided firmware and option ROM (Refer to the [Flashing firmware and option ROM section](#)).

### 4.5.1. Legacy iSCSI Boot

1. Reboot the system.
2. Press `[Alt+C]` when the message to configure Chelsio adapters appears on the screen.

```
Chelsio Unified Boot BIOS
Copyright (C) 2003-2016 Chelsio Communications
Press <Alt-C> to Configure T5/T6 Card(s). Press <Alt-S> to skip BIOS.
```

3. The configuration utility appears as shown below:


```
Chelsio adapters in the system
1. Bus:81 Dev:00 T6225-CR
```

Choose the adapter on which you flashed the option ROM image and press `[Enter]`.

4. Enable the adapter BIOS if not already enabled and press `[Enter]`.

```
# 1: Chelsio T6 adapter at PCI Bus: 81 Device: 00

Adapter BIOS : ENABLED
Initialization platform : Both
Identify Ports
Boot Mode : Compatibility
EDD : 2.1
EBDA Relocation : PERMITTED
```



**Note** Use the default values for Boot Mode, EDD and EBDA Relocation parameters, unless instructed otherwise.

- Choose *iSCSI* from the list to configure and press *[Enter]*.

```

# 1: Chelsio T6 adapter at PCI Bus: 81 Device: 00

Choose a function to configure

1. PXE
2. FCoE
3. iSCSI
    
```

- Choose the first option, **Configure Function Parameters**, from the list of parameter type and press *[Enter]*.

```

Chelsio Unified BOOT Setup Utility

Ctrl : T6225-CR      FW :          DevId  : 0x6501  Ports   : 2
Bios  :             Bus: 81      Device  : 00      Function: 5

Choose the parameter type to configure

1. Configure Function Parameters
2. Configure Initiator Parameters
3. Configure CHAP Parameters
4. Configure Network Parameters
5. Configure Target Parameters
6. Discover iSCSI Target(s)
    
```

- Enable iSCSI BIOS if not already enabled. iBFT (iSCSI Boot Firmware Table) will be selected by default. Only iBFT is supported in Linux.

```

Ctrl : T6225-CR      FW :          DevId  : 0x6501  Ports   : 2
Bios  :             Bus: 81      Device  : 00      Function: 5

Bios : ENABLED

Port order for boot retry : 00      NONE

Discovery Timeout : 30

iSCSI OS Initiator : iBFT

iSCSI Login Retry (Slow NW) : 0
    
```

You can also configure the number of iSCSI login attempts (retries) in case the network is unreachable or slow

- Choose the order of the ports to discover iSCSI targets.

```

Ctrl  : T6225-CR      FW : 00.00.00.00  DevId  : 0x6501  Ports   : 2
Bios  : 00.00.00.00  Bus: 81          Device : 00      Function: 5

```

---

```

                Bios : ENABLED

Port order for boot retry : 00  31

        Discovery Timeout : 30

        iSCSI OS Initiator : iBFT

        iSCSI Login Retry (Slow NW) : 0

```

- Set discovery timeout to a suitable value. Recommended value is  $\geq 30$ .

```

Ctrl  : T6225-CR      FW : 00.00.00.00  DevId  : 0x6501  Ports   : 2
Bios  : 00.00.00.00  Bus: 81          Device : 00      Function: 5

```

---

```

                Bios : ENABLED

Port order for boot retry : 00  01

        Discovery Timeout : 30

        iSCSI OS Initiator : iBFT

        iSCSI Login Retry (Slow NW) : 0

```

- Press `[Esc]` and then `[Y]` to save the configuration.

```

Ctrl  : T6225-CR      FW : 00.00.00.00  DevId  : 0x6501  Ports   : 2
Bios  : 00.00.00.00  Bus: 81          Device : 00      Function: 5

```

---

```

                Bios : ENABLED

Port ord
i
        iSCSI Login Retry (Slow NW) : 0

```

**WARNING!**

Do you want to save the configuration?

<Y>=Yes, <N>=No, <C>=Cancel

- Go back and choose **Configure Initiator Parameters** to configure the initiator related properties.

```

Ctrl  : T6225-CR      FW :          DevId  : 0x6501  Ports   : 2
Bios  :              Bus: 81      Device  : 00      Function: 5

```

---

```

Choose the parameter type to configure

1. Configure Function Parameters
2. Configure Initiator Parameters
3. Configure CHAP Parameters
4. Configure Network Parameters
5. Configure Target Parameters
6. Discover iSCSI Target(s)

```

12. Initiator properties such as IQN, Header Digest, Data Digest are displayed. Change the values appropriately or continue with the default values. Press `[F10]` to save the configuration.

```

Initiator IQN : .com.chelsio.boot:00074304B160
Header Digest : None
Data Digest   : None
InitialR2T    : No
ImmediateData : Yes
MaxOutstandingR2T : 1
DefaultTime2Wait : 20
DefaultTime2Retain : 20
FirstBurstLength : 65536
MaxBurstLength  : 262144

```

**Note** *MaxBurstLength and FirstBurstLength range from 512 to 16777215 bytes.*

13. CHAP authentication is disabled by default. To enable and configure, go back and choose **Configure CHAP Parameters**.

```

Ctrl  : T6225-CR      FW :          DevId  : 0x6501  Ports   : 2
Bios  :              Bus: 81      Device  : 00      Function: 5

```

---

```

Choose the parameter type to configure

1. Configure Function Parameters
2. Configure Initiator Parameters
3. Configure CHAP Parameters
4. Configure Network Parameters
5. Configure Target Parameters
6. Discover iSCSI Target(s)

```

14. Enable CHAP authentication by selecting ONE-WAY or MUTUAL in the **CHAP Policy** field. Next, choose the CHAP method. Finally, provide Initiator and Target CHAP credentials as per the authentication method selected. Press *[F10]* to save the configuration.

```

Ctrl   : T6225-CR          FW : 00.00.00.00      DevId  : 0x6501  Ports   : 2
Bios   : 00.00.00.00      Bus: 81             Device : 00      Function: 5
-----
                                CHAP Policy : MUTUAL

                                CHAP Method  : None,CHAP

Initiator CHAP Username : init2x

Initiator CHAP Password : chelinit65

Target CHAP Username  : tar12x

Target CHAP Password  : cheltar65
    
```

15. Go back and choose **Configure Network Parameters** to configure the iSCSI Network related properties.

```

Ctrl   : T6225-CR          FW : 00.00.00.00      DevId  : 0x6501  Ports   : 2
Bios   : 00.00.00.00      Bus: 81             Device : 00      Function: 5
-----
                                Choose the parameter type to configure

                                1. Configure Function Parameters
                                2. Configure Initiator Parameters
                                3. Configure CHAP Parameters
                                4. Configure Network Parameters
                                5. Configure Target Parameters
                                6. Discover iSCSI Target(s)
    
```

16. Select the port using which you want to connect to the target. Press *[Enter]*.

```

Ctrl   : T6225-CR          FW : 00.00.00.00      DevId  : 0x6501  Ports   : 2
Bios   : 00.00.00.00      Bus: 81             Device : 00      Function: 5
-----
                                Choose a port to configure

                                1. Port 0
                                2. Port 1
    
```

17. Select **Yes** in the **Enable DHCP** field to configure port using DHCP or **No** to manually configure the port. Press **[F10]** to save the configuration.

```

Ctrl  : T6225-CR          FW : 00.00.00.00      DevId  : 0x6501  Ports   : 2
Bios  : 00.00.00.00      Bus: 81             Device  : 00    Function: 5
-----
Port 0 network parameter configuration

          VLAN ID : 3
          IP Version : IPV4
          Enable DHCP : No
          IP address : 102.80.80.92
          Subnet mask : 255.255.255.0
          Gateway : 0.0.0.0
          Ping IP address : 0.0.0.0
          Ping IP
    
```

18. Go back and choose **Configure Target Parameters** to configure iSCSI target related properties.

```

Ctrl  : T6225-CR          FW : 00.00.00.00      DevId  : 0x6501  Ports   : 2
Bios  : 00.00.00.00      Bus: 81             Device  : 00    Function: 5
-----
Choose the parameter type to configure

1. Configure Function Parameters
2. Configure Initiator Parameters
3. Configure CHAP Parameters
4. Configure Network Parameters
5. Configure Target Parameters
6. Discover iSCSI Target(s)
    
```

19. If you want to discover target using DHCP, select **Yes** in the **Discover Boot Target via DHCP** field. To discover target through static IP, select **No** and provide the target IP and press **[F10]** to save the configuration. The default TCP port selected is 3260.

```

Ctrl  : T6225-CR          FW : 00.00.00.00      DevId  : 0x6501  Ports   : 2
Bios  : 00.00.00.00      Bus: 81             Device  : 00    Function: 5
-----
Discover Boot Target via DHCP : No

          Target IP Version : IPV4
          Target IP address : 102.80.80.186
          Target TCP port : 3260
    
```

20. Go back and choose **Discover iSCSI Target (s)** to connect to a target.

```

Ctrl  : T6225-CR      FW :          DevId  : 0x6501  Ports   : 2
Bios  :              Bus: 81      Device  : 00     Function: 5

```

---

```

Choose the parameter type to configure

1. Configure Function Parameters
2. Configure Initiator Parameters
3. Configure CHAP Parameters
4. Configure Network Parameters
5. Configure Target Parameters
6. Discover iSCSI Target(s)

```

21. Select the portal group on which iSCSI service is provided by the target.

```

Ctrl  : T6225-CR      FW :          DevId  : 0x6501  Ports   : 2
Bios  :              Bus: 81      Device  : 00     Function: 5

```

---

```

Saved boot device

Portal                                LUN
-----                                ---
102.80.80.106:3260                     0

```

22. A list of available targets will be displayed. Select the target you wish to connect to and press **[Enter]**.

```

Ctrl  : T6225-CR      FW :          DevId  : 0x6501  Ports   : 2
Bios  :              Bus: 81      Device  : 00     Function: 5
CurPort: 0          IP   : 102.80.80.92  BootDev#: 0     Target#  : 1

```

---

```

List of discovered targets

1. iqn.2017-10.com.chl.target1
2. iqn.2017-10.com.chl.target2_

```

23. A list of LUNs configured on the selected target will be displayed. Select the LUN you wish to connect to and press *[Enter]*.

```

Ctrl   : T6225-CR          FW : ██████████   DevId   : 0x6501   Ports   : 2
Bios   : ██████████       Bus: 81          Device  : 00      Function: 5
CurPort: 0                IP  : 102.80.80.92  BootDev#: 0      Target#  : 1
    
```

List of LUNs present on the target

```

1. LUN: 0000000000000000 LIO-ORG 60.0000 GB
    
```

24. Press *[Esc]* and then *[Y]* to save the configuration.

```

Ctrl   : T6225-CR          FW : ██████████   DevId   : 0x6501   Ports   : 2
Bios   : ██████████       Bus: 81          Device  : 00      Function: 5
    
```

**WARNING!**

Do you want to save the configuration?

<Y>=Yes, <N>=No, <C>=Cancel


25. Reboot the machine.
26. During POST, allow the Chelsio Option ROM to discover iSCSI targets.

```

Chelsio Unified Boot BIOS ██████████
Copyright (C) 2003-2016 Chelsio Communications
Press <Alt-C> to Configure T5/T6 Card(s). Press <Alt-S> to skip BIOS.

Installing Chelsio T6 Storage iSCSI BIOS ██████████
PCI BIOS v3.0 , PCI FW v3.0 , PnP BIOS : YES PMM Entry is passed by BIOS
Bringing up link on PCI:81:00:5 Port 0 ... Done
Waiting for LLDP negotiation ... Done
Discovering iSCSI Target(s) on PCI:81:00:5 Port 0 ... Done
sd(1): T6225-CR          PCI:81:00:5 P(0) MAC:00:07:43:04:B3:F0 Host:102.80.80.92
iqn.2003-15.com.chelsio.boot: Target:102.80.80.186:3260 iqn.2017-18.com.chl.targ
et2 Lun(00) LIO-ORG vol1          4.0 60.0000 GB
Storage iSCSI BIOS Installed Successfully!
    
```

27. Enter BIOS setup and choose iSCSI target LUN discovered through the Chelsio adapter as the first boot device.

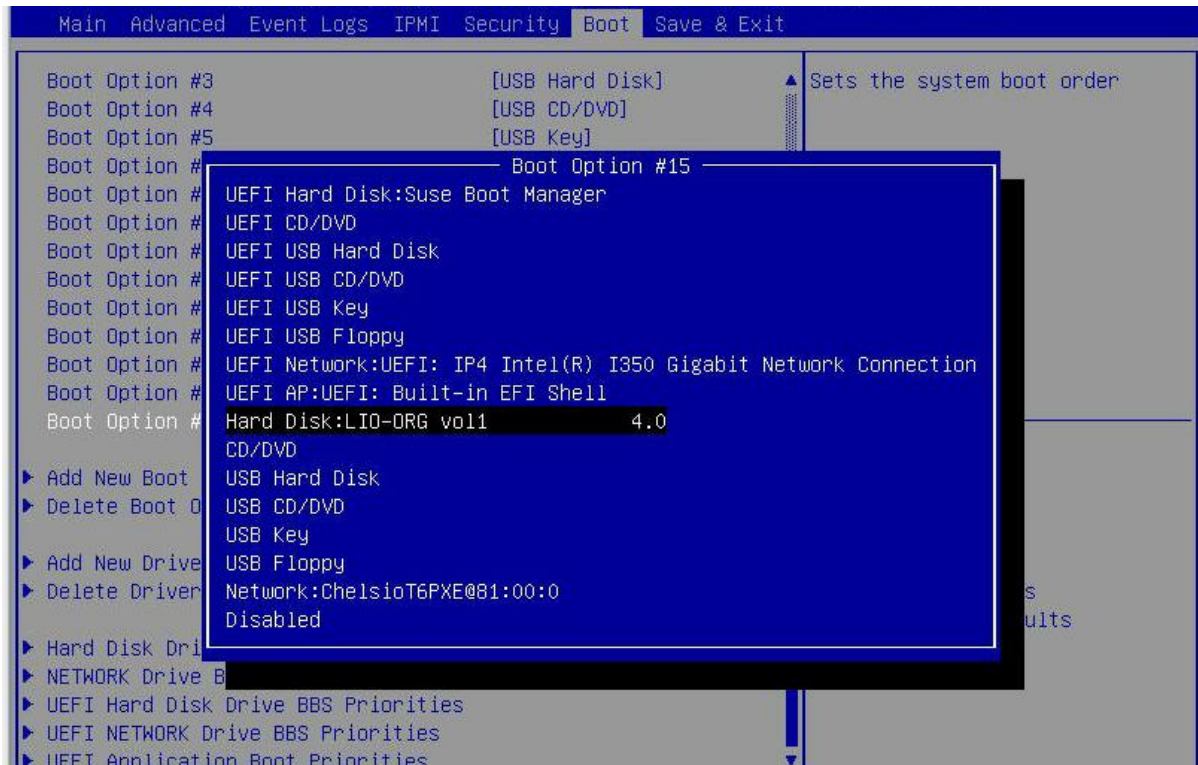

28. Reboot and boot from the iSCSI Target LUN or install the required OS using PXE.

### 4.5.2. uEFI iSCSI Boot




- Only uEFI v2.3.1, v2.4 and v2.5 supported.
- Any other uEFI version is NOT SUPPORTED and may render your system unusable.

#### 4.5.2.1. HII

This section describes the method to configure and use Chelsio uEFI iSCSI interfaces using HII.

1. Reboot the system and go into BIOS setup.
2. Select **Chelsio T5/T6** and press *[Enter]*.

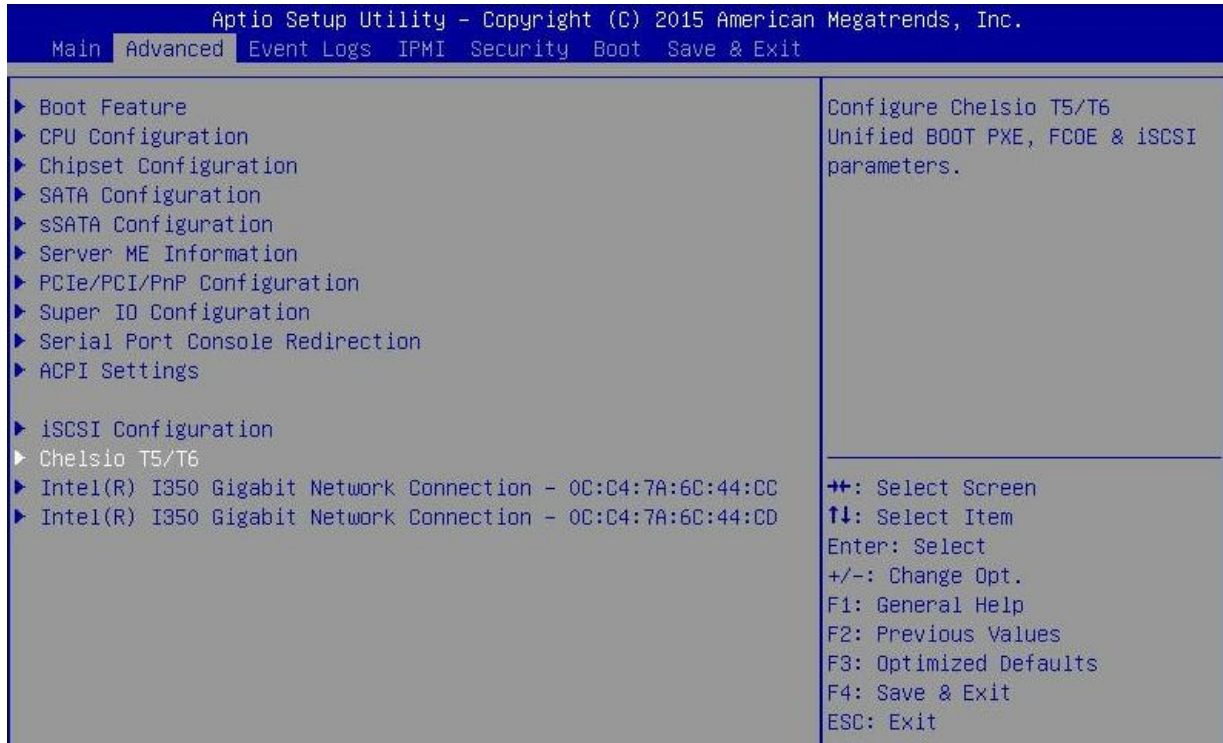

**Note** *Ensure that the Chelsio uEFI driver is loaded correctly as mentioned in the [Loading uEFI driver](#) section.*


3. Select the Chelsio adapter to be configured and press **[Enter]**.



4. Select **Configuration Utility** and press **[Enter]**.




5. Enable adapter BIOS if not already enabled.

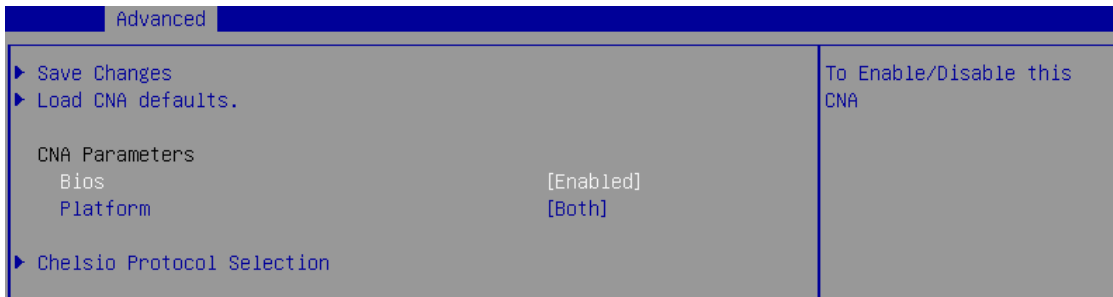


**Note** *It is highly recommended that you use the **Save Changes** option every time a parameter/option is changed.*


6. Select **Chelsio Protocol Selection** and press **[Enter]**.

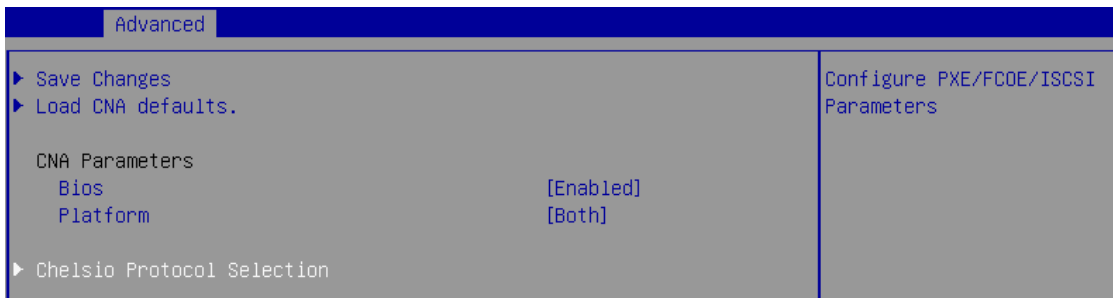


7. Select **iSCSI** and press **[Enter]**.

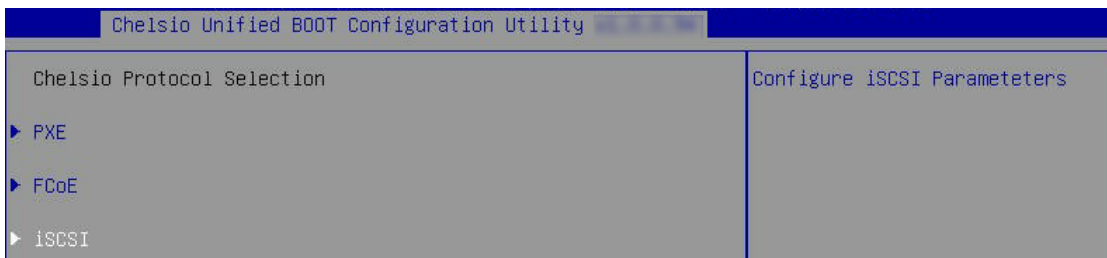


8. Under **Function Parameters**, enable iSCSI BIOS, if not already enabled.

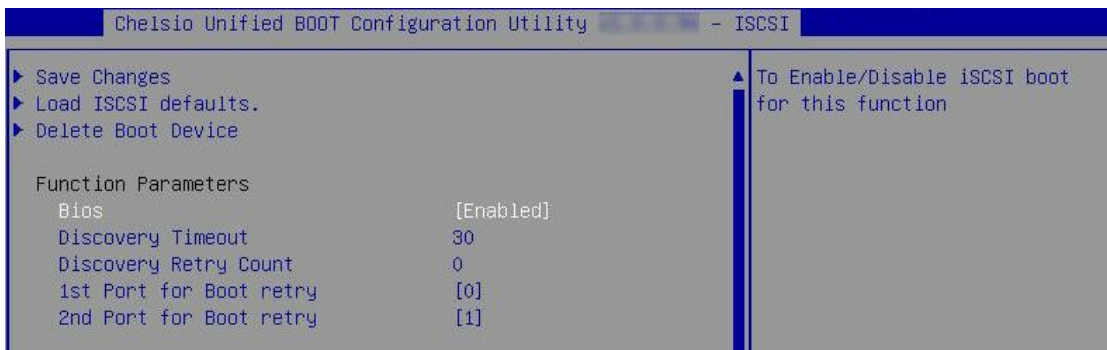


9. Set discovery timeout to a suitable value. The recommended value is  $\geq 30$ .

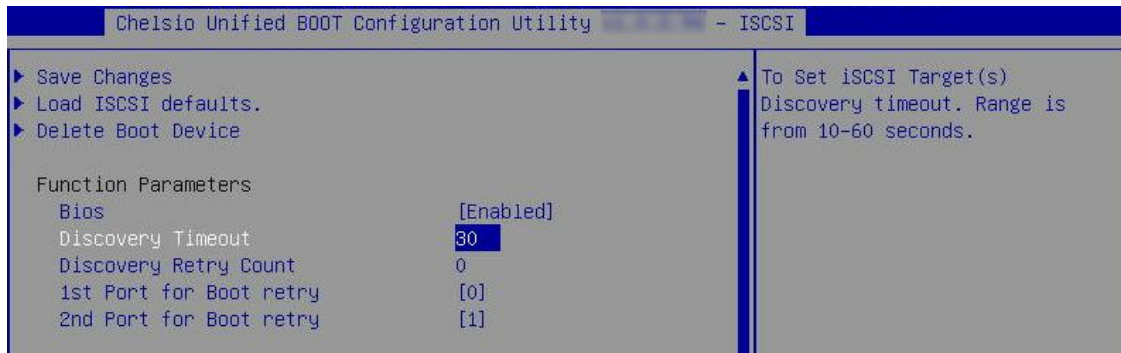

10. Choose the order of the ports to discover iSCSI targets.

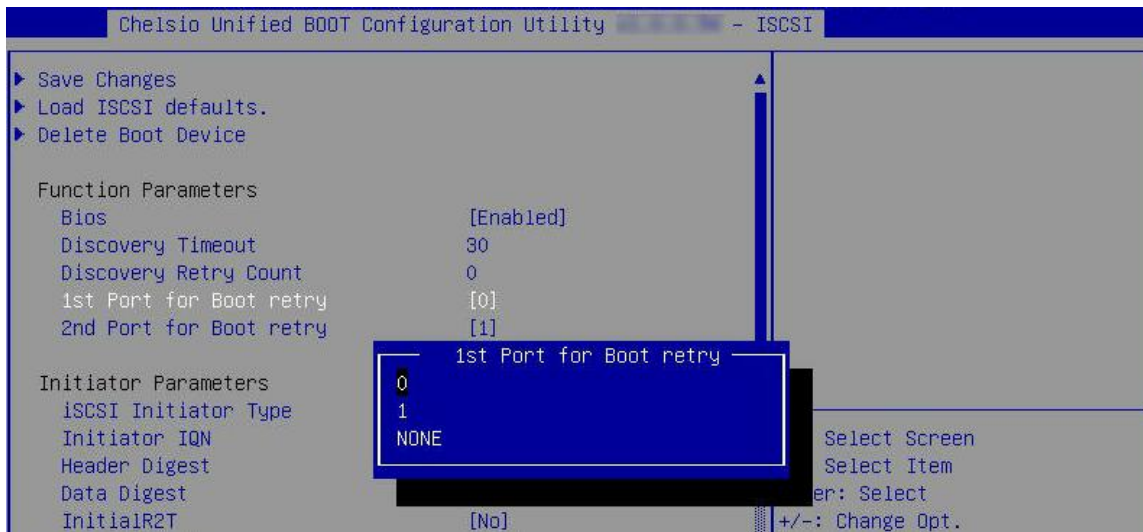


- Under **Initiator Parameters**, iSCSI Initiator properties such as IQN, Header Digest, Data Digest are displayed. Change the values appropriately or continue with the default values.

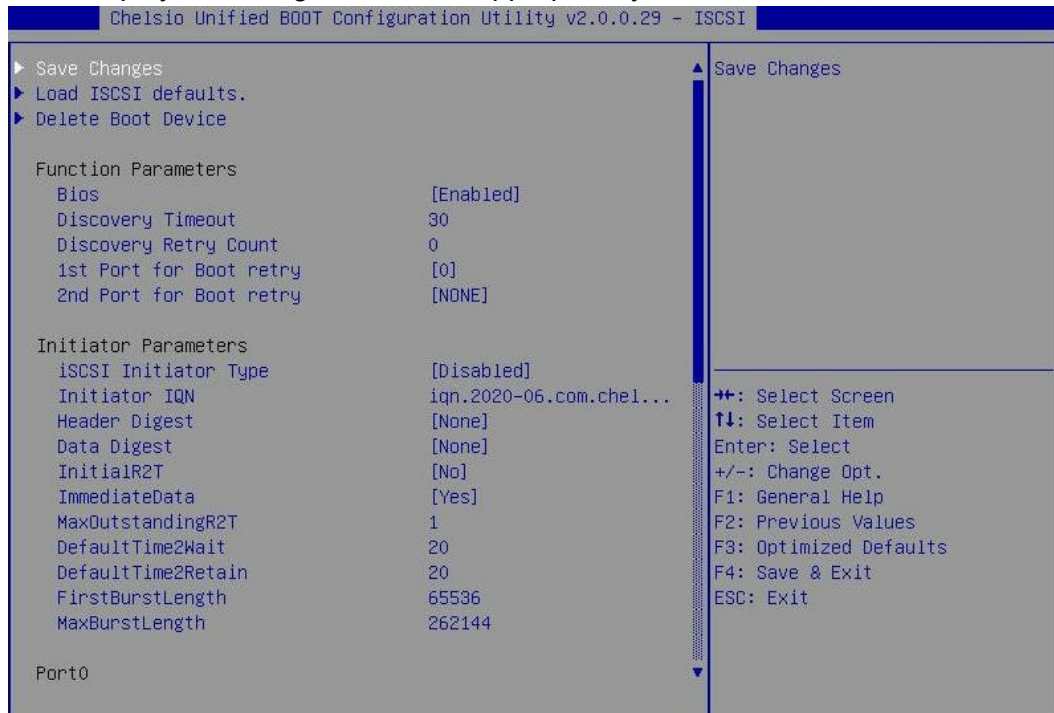


**Note** *MaxBurstLength and FirstBurstLength range from 512 to 16777215 bytes.*


- Under the first port, select **Enable DHCP** field, press **[Enter]**, and select **Enabled**. This will configure port using DHCP. Select **Disabled** to manually configure the port.

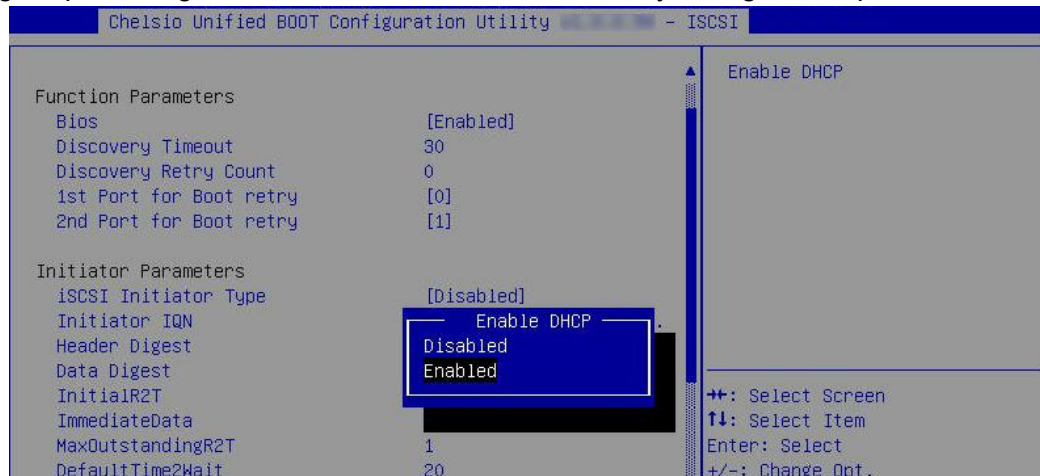


- Under **Target Parameters**, select **Enabled** for the **Boot Target via DHCP** parameter to discover target using DHCP.

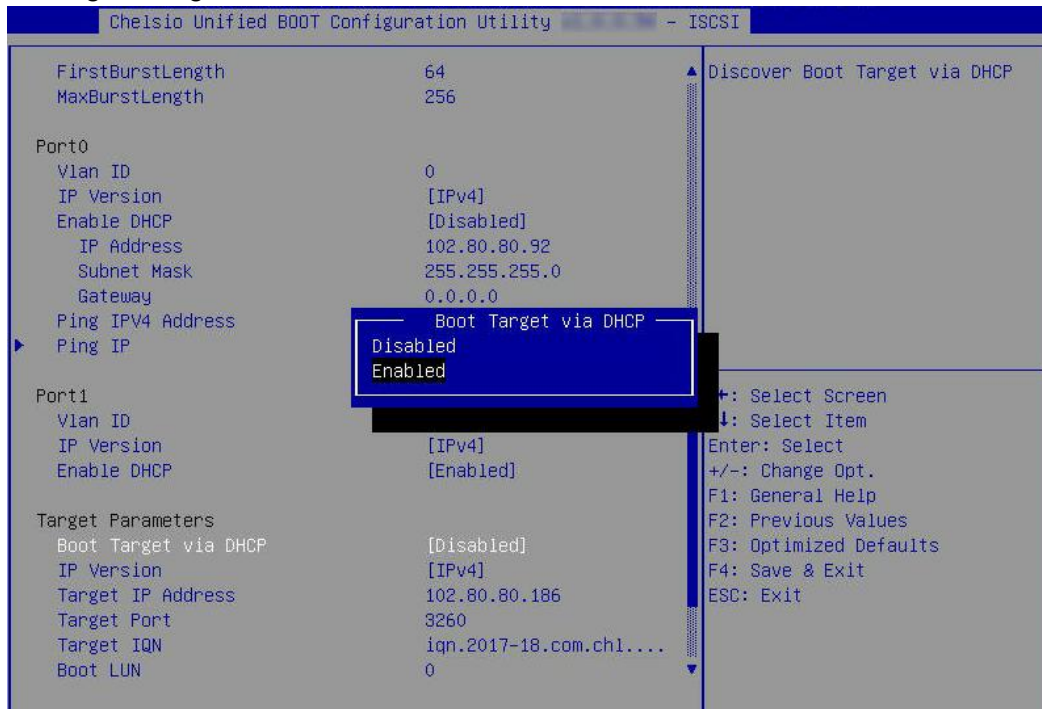


To discover target via static IP, select **Disabled** and provide the target IP address.

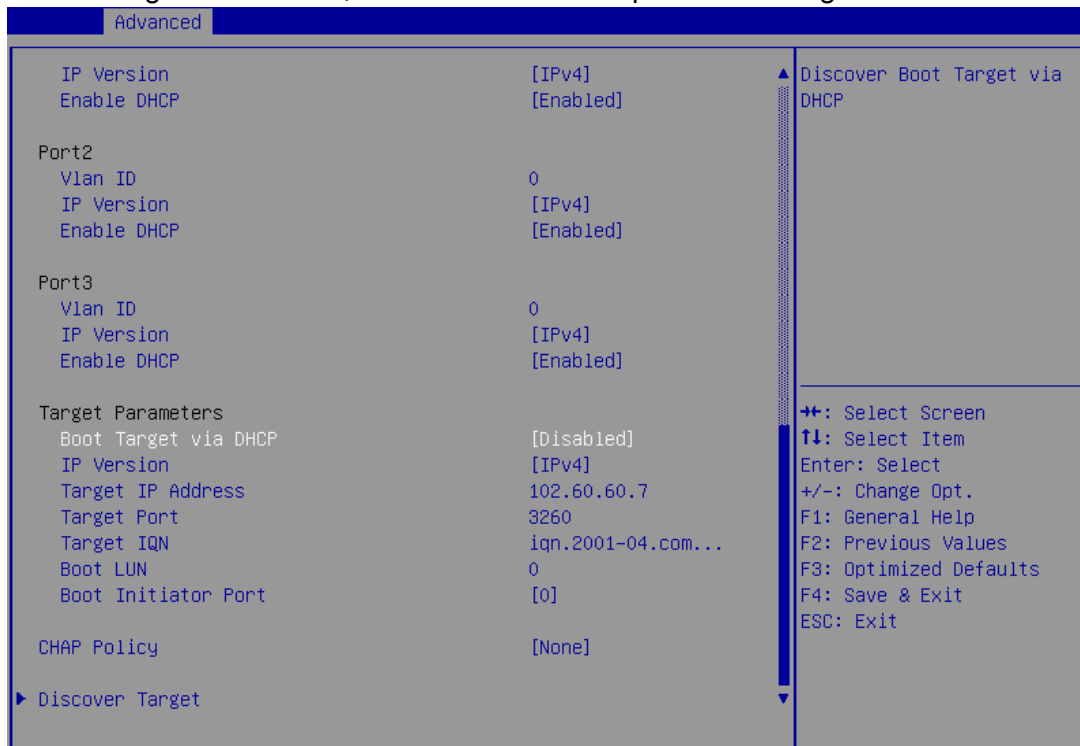


- CHAP authentication is disabled by default. To enable and configure, highlight **CHAP Policy** and hit **[Enter]**. Select the policy type from the corresponding pop-up and press **[Enter]** again.

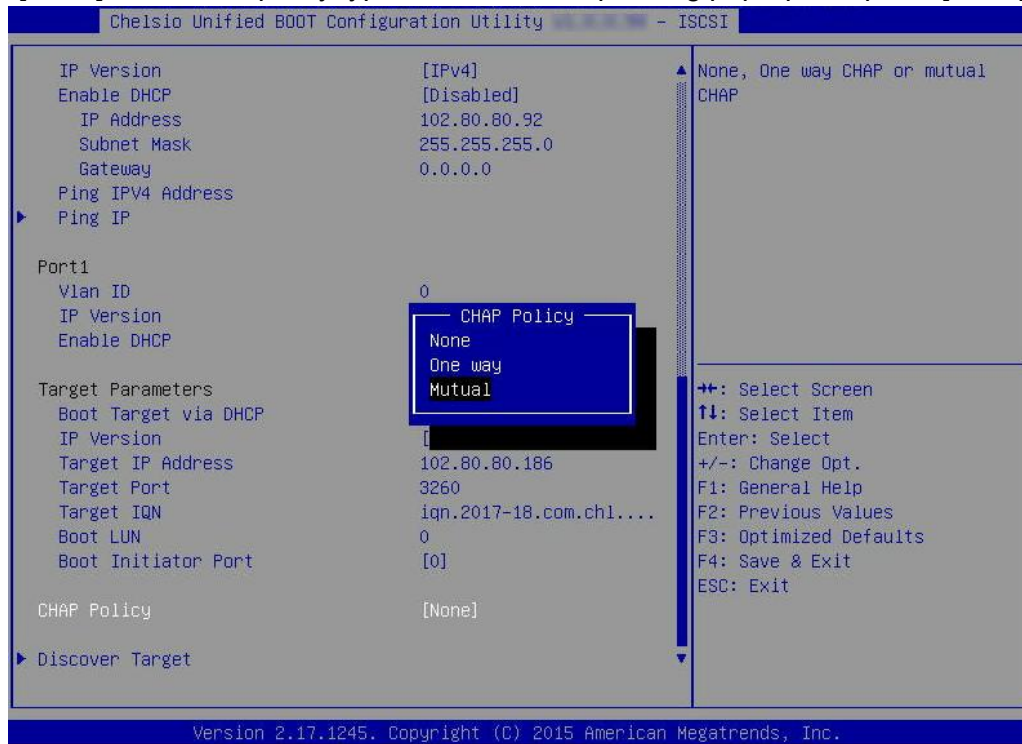

- Provide Initiator and Target CHAP credentials as per the CHAP policy selected.

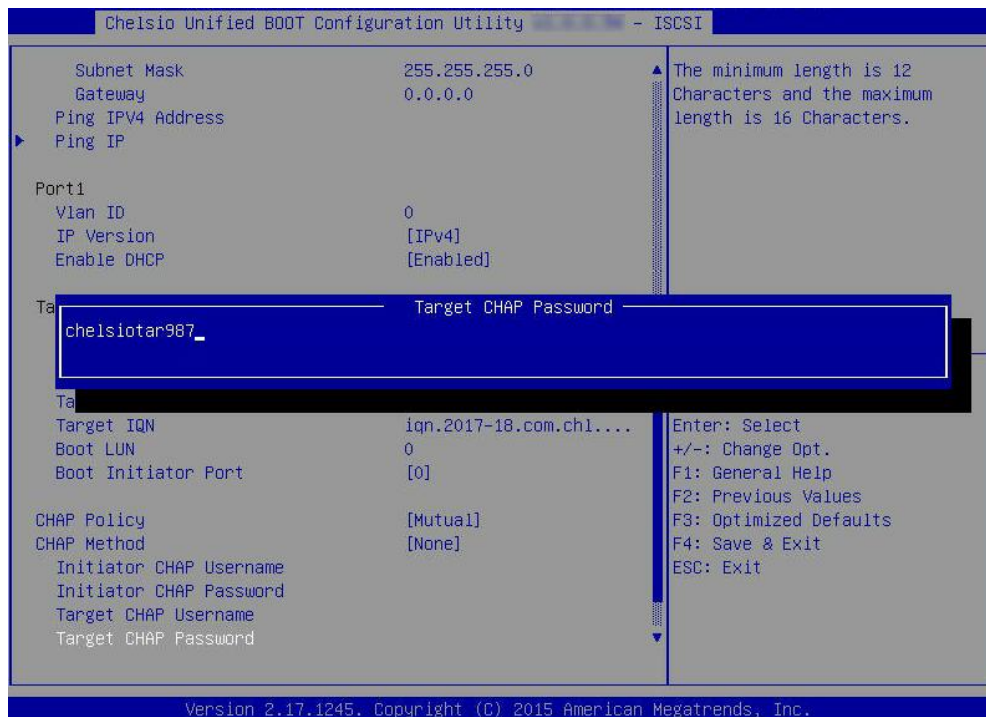


16. Select **Discover Target** and press *[Enter]* to discover iSCSI targets connected to the switch. Wait until all reachable targets have been discovered.

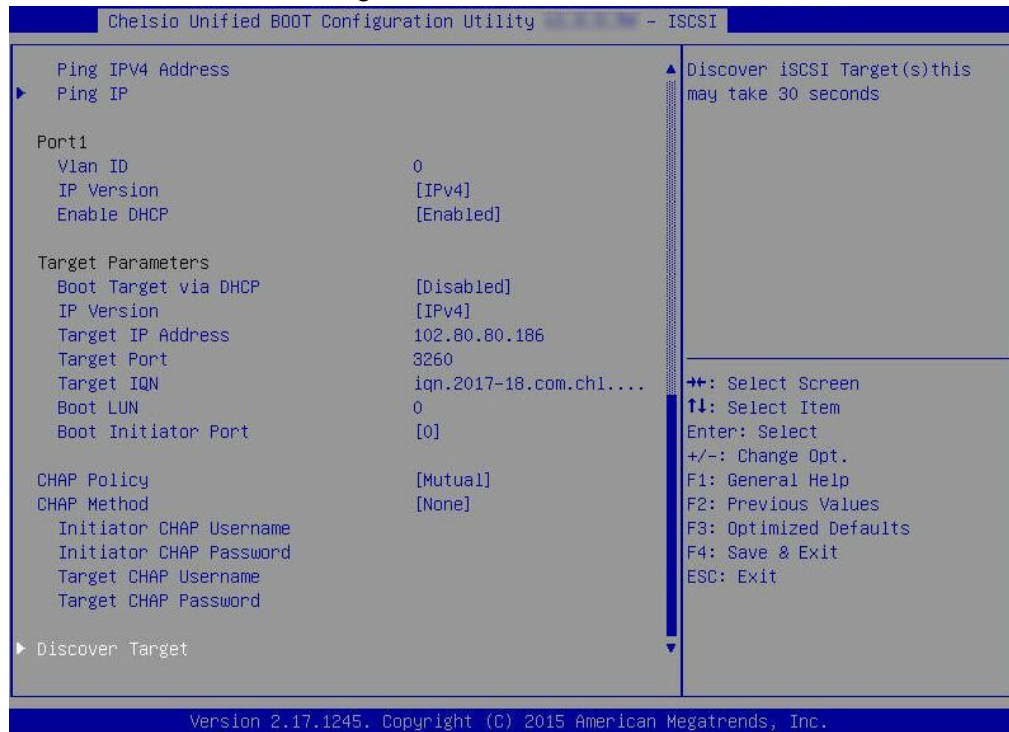


17. A list of available targets will be displayed. Select the target you wish to connect to and press *[Enter]*.




18. A list of LUNs configured on the selected target will be displayed. Select the LUN you want to connect to and press *[Enter]*.

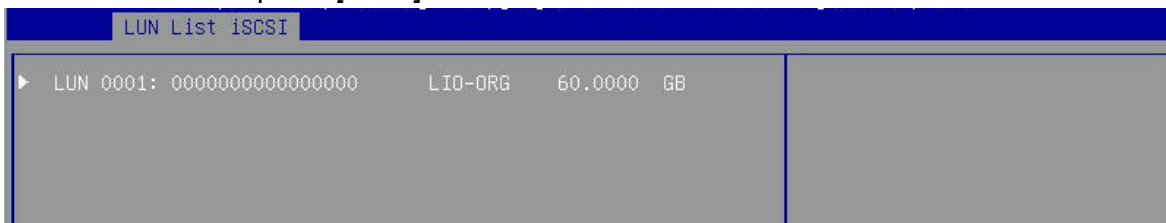

19. Select **Save Changes** and press *[Enter]*.

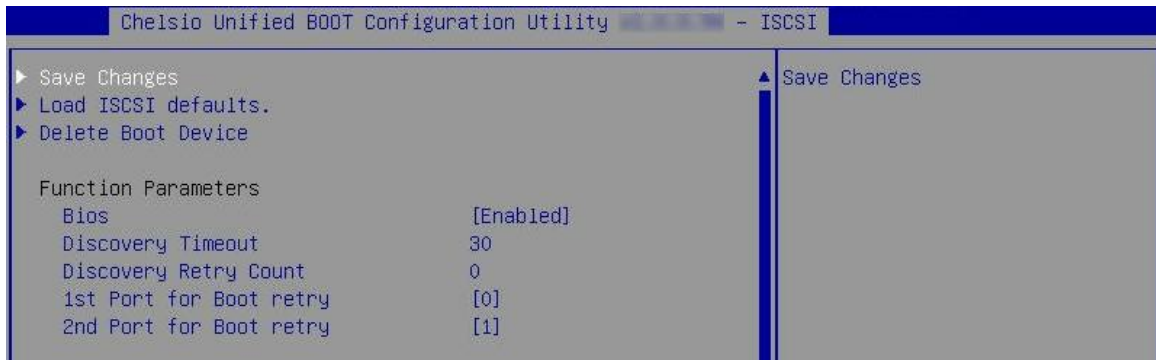

20. Reboot the system for changes to take effect.
21. The discovered LUN should appear in the **Boot Configuration/ Boot Information** section and system BIOS.

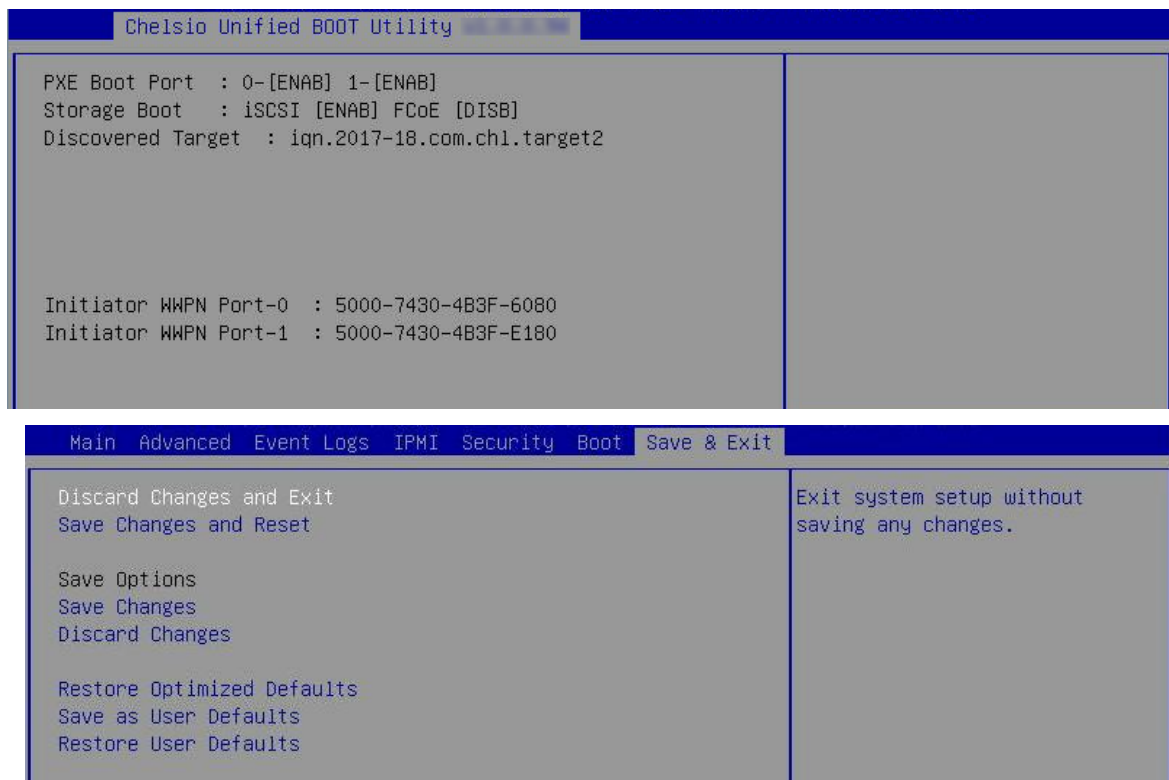

22. Select the LUN as the first boot device and exit from BIOS.
23. Either boot from the LUN or install the required OS.


### 4.5.2.2. drvcfg

This section describes the method to configure and use Chelsio uEFI iSCSI interfaces using drvcfg.


1. Boot the system into EFI shell.
2. Run the following command to launch the configuration utility.

```
fs0:\> drvcfg -s_
```

3. Choose the Chelsio adapter which needs to be configured.

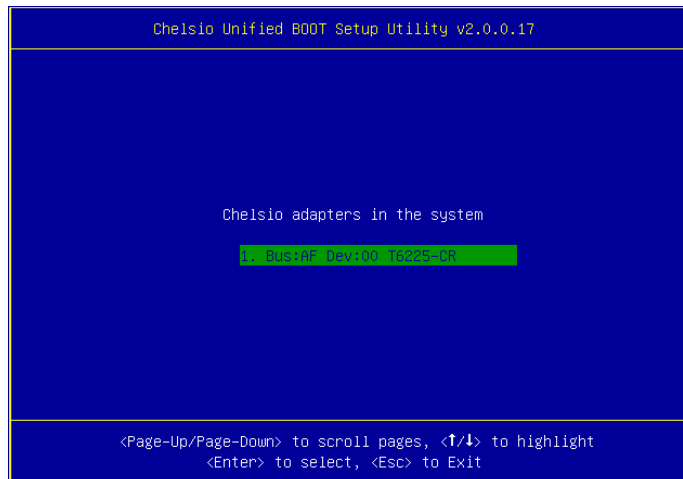

4. Highlight **Enter config utility** and press *[Enter]*.

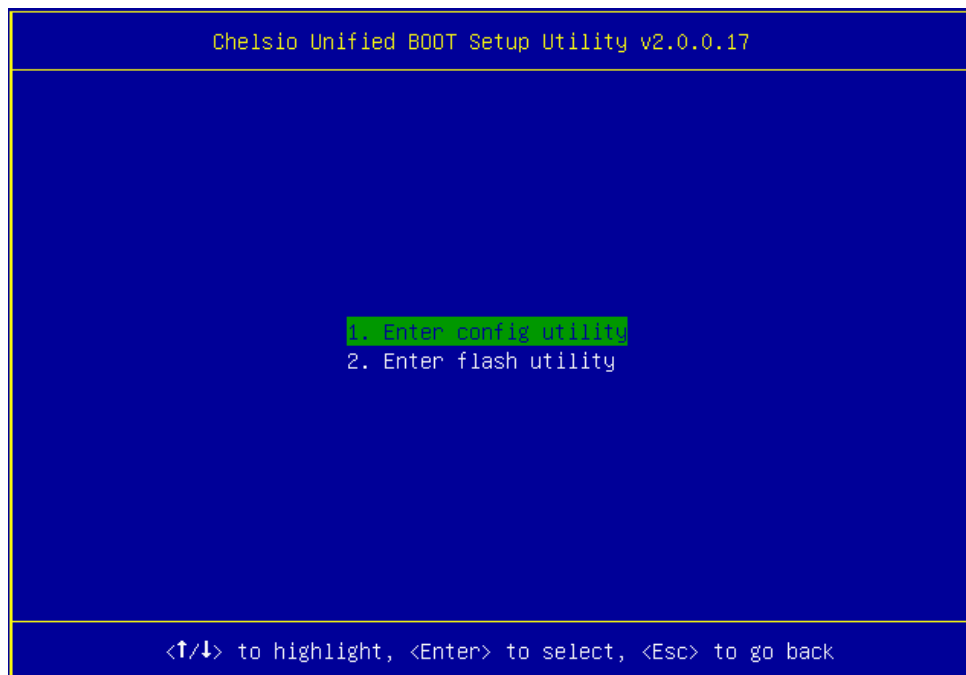

5. Further configuration steps are similar from step 4 of the [Legacy iSCSI Boot](#) section.

## 4.6. Update Option ROM settings

### 4.6.1. Default settings

If you wish to restore option ROM settings to their default values. That is PXE enabled, iSCSI and FCoE disabled, use any of the methods mentioned below:

#### 4.6.1.1. Using Option ROM (boot level)

- **Legacy PXE**

Boot the system into Chelsio's Unified Boot Setup utility and press *F8*.

```
# 1: Chelsio T6 adapter at PCI Bus: 81 Device: 00

Adapter BIOS : ENABLED

Initialization platform : Both

Identify Ports

Boot Mode : Compatibility

EDD : 2.1

EBDA Relocation : PERMITTED
```

- **uEFI PXE**

Boot the system into uEFI mode and press *F3*.

```
Main  Advanced  Event Logs  IPMI  Security  Boot  Save & Exit

▶ Boot Feature
▶ CPU Configuration
▶ Chipset Configuration
▶ SATA Configuration
▶ sSATA Configuration
▶ Server ME Information
▶ PCIe/PCI/PnP Configuration
▶ Super IO Configuration
▶ Serial Port Console Redirection
▶ ACPI Settings

▶ iSCSI Configuration
▶ Chelsio T5/T6
▶ Intel(R) I350 Gigabit Network Connection - 0C:C4:7A:6C:44:CC
▶ Intel(R) I350 Gigabit Network Connection - 0C:C4:7A:6C:44:CD

Configure Chelsio T5/T6
Unified BOOT PXE, FCoE & iSCSI
parameters.

⇧⇧: Select Screen
⇧⇩: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit
```

### 4.6.1.2. Using *cxgbtool* (OS level)

Change your working directory to *OptionROM* directory and use *cxgbtool* to flash the default boot configuration onto the adapter.

```
[root@host~]# cd ChelsioUwire-x.x.x.x/Uboot/OptionROM/
[root@host~]# cxgbtool <ethX> loadboot-cfg boot.cfg
```

The below command can be used to read the current settings.

```
[root@host~]# cxgbtool <ethX> readboot-cfg
```

```
root@host:~# cxgbtool enp66s0f4 readboot-cfg
current boot setting is : 0x1 (NIC_BOOT: Enabled; FCoE_BOOT: Disabled; iSCSI_BOOT: Disabled)
NIC_BOOT: Port[0] : Enabled, Port[1] : Enabled
Vlan:      Port[0] : 0, Port[1] : 0
```

### 4.6.2. Custom Settings (using *cxgbtool*)

*cxgbtool* utility can modify/update the following Option ROM settings using *modifyboot-cfg* option:

- PXE, FCoE and iSCSI BIOS
- Per port:
  - PXE Boot
  - VLAN

#### 4.6.2.1. Updating BIOS value

Use the below command to enable/disable PXE/FCoE/iSCSI boot for all the ports of the adapter.

```
[root@host~]# cxgbtool <ethX> modifyboot-cfg bios <value>
```

Where,

*ethX* : Chelsio interface.

*value* : Bitwise OR of boot types that need to be enabled. Ranging from 0x0 – 0x7.

PXE (NIC) = 0x1

FCoE = 0x2

iSCSI = 0x4

#### Examples:

- To enable NIC and FCoE boot on all the ports,

```
root@host:~# cxgbtool enp66s0f4 modifyboot-cfg bios 0x3
root@host:~# cxgbtool enp66s0f4 readboot-cfg
current boot setting is : 0x3 (NIC_BOOT: Enabled; FCoE_BOOT: Enabled; iSCSI_BOOT: Disabled)
NIC_BOOT: Port[0] : Enabled, Port[1] : Enabled
Vlan:      Port[0] : 0, Port[1] : 0
```

- To enable only iSCSI boot on all the ports,

```
root@host:~# cxgbtool enp66s0f4 modifyboot-cfg bios 0x4
root@host:~# cxgbtool enp66s0f4 readboot-cfg
current boot setting is : 0x4 (NIC_BOOT: Disabled; FCoE_BOOT: Disabled; iSCSI_BOOT: Enabled)
NIC_BOOT: Port[0] : Disabled, Port[1] : Disabled
Vlan:      Port[0] : 0, Port[1] : 0
```

#### 4.6.2.2. Per Port settings

Use the below command to enable/disable PXE (NIC) boot per port.

```
[root@host~]# cxgbtool <ethX> modifyboot-cfg port <port no.> <param>
```

Where,

*ethX* : Chelsio interface.

*port no.* : Port number ranging from 0 – 3.

*param* : en\_nicboot to enable and dis\_nicboot to disable NIC boot for the port.

#### Example:

- To disable NIC boot on Port 0,

```
root@host:~# cxgbtool enp66s0f4 modifyboot-cfg port 0 dis_nicboot
root@host:~# cxgbtool enp66s0f4 readboot-cfg
current boot setting is : 0x1 (NIC_BOOT: Enabled; FCoE_BOOT: Disabled; iSCSI_BOOT: Disabled)
NIC_BOOT: Port[0] : Disabled, Port[1] : Enabled
Vlan:      Port[0] : 0, Port[1] : 0
```

Use the below command to set the VLAN id for the port.

```
[root@host~]# cxgbtool <ethX> modifyboot-cfg port <port no.> vlan <id>
```

Where,

*ethX* : Chelsio interface.


*port no.* : Port number ranging from 0 – 3.

*id* : VLAN id ranging from 0 – 4095.

#### Example:

- To set vlan id 50 on Port 1,

```
root@host:~# cxgbtool enp66s0f4 modifyboot-cfg port 1 vlan 50
root@host:~# cxgbtool enp66s0f4 readboot-cfg
current boot setting is : 0x1 (NIC_BOOT: Enabled; FCoE_BOOT: Disabled; iSCSI_BOOT: Disabled)
NIC_BOOT: Port[0] : Enabled, Port[1] : Enabled
Vlan:      Port[0] : 0, Port[1] : 50
```

 **Note** For more information, refer to *cxgbtool* man page using `man cxgbtool`.

## 4.7. iPXE

iPXE is the leading, free, open source network boot firmware. It provides a full PXE implementation enhanced with additional features such as boot from a web server via HTTP, automating boot commands etc. The following are supported:

- TFTP Boot: Legacy & uEFI
- HTTP Boot: uEFI
- Linux (RHEL 10.1/10.0/9.7/9.6), Windows (10 Client, Server 2019/2022)
- Chainload into iPXE

### 4.7.1. Configuring iPXE Server for Linux OS installation

Before proceeding, ensure that the Linux iPXE Server is configured for [TFTP boot](#) or [HTTP boot](#). Follow the below steps to chainload iPXE:

1. Clone the iPXE repo.

```
[root@server ~]# git clone https://github.com/ipxe/ipxe
[root@server ~]# cd ipxe
[root@server ipxe]# git checkout 06e229590c6e94c1dd8606a374714f7cfc50241a
```

2. Build the code to generate *undionly.kpxe* for Legacy or *ipxe.efi* for uEFI modes.

#### Legacy:

```
[root@server ipxe]# cd src
[root@server src]# make bin/undionly.kpxe
```

#### uEFI:

```
[root@server ipxe]# cd src
[root@server src]# make bin-x86_64-efi/ipxe.efi
```

3. Copy the generated files to TFTP or HTTP server directories.

#### Legacy TFTP:

```
[root@server ~]# mkdir -p /var/lib/tftpboot/ipxe
[root@server ~]# cp undionly.kpxe /var/lib/tftpboot/ipxe/.
```

#### uEFI TFTP:

```
[root@server ~]# mkdir -p /var/lib/tftpboot/ipxe
[root@server ~]# cp ipxe.efi /var/lib/tftpboot/ipxe/.
```

**uEFI HTTP:**

```
[root@server ~]# mkdir -p /var/www/ipxe
[root@server ~]# cp ipxe.efi /var/www/ipxe/.
```

4. Update the dhcp server configuration file `/etc/dhcp/dhcpd.conf`.

**Legacy/uEFI TFTP:**

```
option client-architecture code 93 = unsigned integer 16;
  if exists user-class and option user-class = "iPXE" {
    filename "http://101.1.1.66/boot.php";
  } elseif option client-architecture = 00:00 {
    filename "ipxe/undionly.kpxe";
  } else {
    filename "ipxe/ipxe.efi";
  }
}
```

**uEFI HTTP:**

```
if option client-architecture = encode-int ( 16, 16 ) {
  option vendor-class-identifier "HTTPClient";
  filename "http://101.1.1.66/ipxe/ipxe.efi";
} else {
filename "http://101.1.1.66/boot.php";
}
```

5. Extract the OS installation DVD and copy `initrd.img` and `vmlinuz` to the required http path.
6. Configure `boot.php` with the iPXE commands.

```
[root@server ~]# vim /var/www/boot.php
#!/ipxe
set base http://101.1.1.66/RHEL92/

prompt -k 0x197e -t 10000 Press F12 to install RHEL9.2... || exit


:start
menu Welcome to Chelsio iPXE Boot Menu

item Install_RHEL_9_2 RHEL 9.2 Installation

choose --default Install_RHEL_9_2 --timeout 30000 target && goto ${target}
##### Menu Items #####

:Install_RHEL_9_2
kernel ${base}/images/pxeboot/vmlinuz fastboot initrd=initrd.img
inst.repo=${base}
initrd ${base}/images/pxeboot/initrd.img
boot

goto start
```

 **Note** *The above configurations are provided for example purposes only. Update them based on your environment. For more information, refer to the [iPXE documentation section](#).*

## 4.7.2. Legacy iPXE TFTP Boot

Before proceeding, ensure that the Chelsio adapter on the client machine has been flashed with the provided firmware, Option ROM, and boot configuration (Refer to the [Flashing Firmware and Option ROM](#) section).

1. Reboot the system and go into the BIOS Boot Manager. *Chelsio PXE* device should be listed. Select it and press *[Enter]*. If it is not listed, follow the instructions in the [Legacy PXE Boot](#) section.



```
Chelsio UNDI, PXE-v2.0.0.47
Copyright (C) 2003-2016 Chelsio Communications
Copyright (C) 1997-2008 Intel Corporation

PCI Bus:Dev:Fcn = 02000
VLAN Disabled

Initializing link in port:0 Done

CLIENT MAC ADDR: 00 07 43 04 AE 00 GUID: 00000000-0000-0000-0000-0CC47A6C6F8E
CLIENT IP: 101.1.1.50 MASK: 255.255.255.0 DHCP IP: 101.1.1.66
PXE->EB: iPXE at 9580:0060, entry point at 9580:00FA
        UNDI code segment 9580:3E80, data segment 8AA2:8160 (554-615kB)
        UNDI device is PCI 02:00.0, type DIX+002.3
        554kB free base memory after PXE unload
iPXE initialising devices...
PCI Bus:Dev:Fcn = 02000
VLAN Disabled
```

2. iPXE will start to initialize.

```
iPXE initialising devices...
PCI Bus:Dev:Fcn = 02000
VLAN Disabled

Initializing link in port:0 Done
ok

iPXE 1.21.1+ (g22653) -- Open Source Network Boot Firmware -- https://ipxe.org
Features: DNS HTTP iSCSI TFTP AoE ELF MBOOT PXE bzImage Menu PXEXT

net0: 00:07:43:04:ae:00 using undionly on 0000:02:00.0 (Ethernet) [open]
[Link:up, TX:0 TXE:1 RX:0 RXE:0]
[TXE: 1 x "Network unreachable (https://ipxe.org/200806011)"]
Configuring (net0 00:07:43:04:ae:00)..... ok
net0: 101.1.1.51/255.255.255.0
Next server: 101.1.1.66
Filename: http://101.1.1.66/boot.php
http://101.1.1.66/boot.php... ok
boot.php : 818 bytes [script]
Press F12 to install RHEL9.2...
```

3. Press *F12* and the OS installation menu appears. Continue with the OS installation.



### 4.7.3. uEFI iPXE TFTP Boot

Before proceeding, ensure that the Chelsio adapter on the client machine has been flashed with the provided firmware, Option ROM, and boot configuration (Refer to the [Flashing Firmware and Option ROM](#) section).

1. Reboot the system and go into the BIOS Boot Manager. *uEFI: IP4 Chelsio PXE* device should be listed. Select it and press *[Enter]*.

If it is not listed, follow the instructions in the [uEFI PXE Boot](#) section.



2. iPXE will start to initialize.

```

iPXE initialising devices...ok

iPXE 1.21.1+ (g22653) -- Open Source Network Boot Firmware -- https://ipxe.org
Features: DNS HTTP iSCSI TFTP VLAN SRP AoE EFI Menu

net2: 00:07:43:04:ae:80 using NII on NII-0000:02:00.0 (Ethernet) [open]
  [Link:down, TX:0 TXE:1 RX:0 RXE:0]
  [Link status: Unknown (https://ipxe.org/1a086194)]
  [TXE: 1 x "Network unreachable (https://ipxe.org/28086090)"]
Configuring (net2 00:07:43:04:ae:80)..... ok
net0: fe80::ec4:7aff:fe6c:6f8e/64 (inaccessible)
net1: fe80::ec4:7aff:fe6c:6f8f/64 (inaccessible)
net2: 101.1.1.51/255.255.255.0
net2: fe80::207:43ff:fe04:ae80/64
net3: fe80::207:43ff:fe04:ae88/64 (inaccessible)
Next server: 101.1.1.66
Filename: http://101.1.1.66/boot.php
Root path: iscsi:101.1.1.66:::iqn.2015-12.org.linux-iscsi.chelsio.target1
Registered SAN device 0x80
http://101.1.1.66/boot.php... ok
boot.php : 818 bytes [script]
Press F12 to install RHEL9.2...
    
```


3. Press *F12* and the OS installation menu will show up. Continue with the OS installation.




#### 4.7.4. uEFI iPXE HTTP Boot


Before proceeding, ensure that the Chelsio adapter on the client machine has been flashed with the provided firmware, Option ROM, and boot configuration (Refer to the [Flashing Firmware and Option ROM](#) section).

1. Reboot the system and go into the BIOS Boot Manager. *PCI/MAC(00:07:43:xx:xx:xx)/IPv4/Uri()* device should be listed. Select it and press *[Enter]*. If it is not listed, follow the instructions in the [uEFI PXE Boot](#) section.

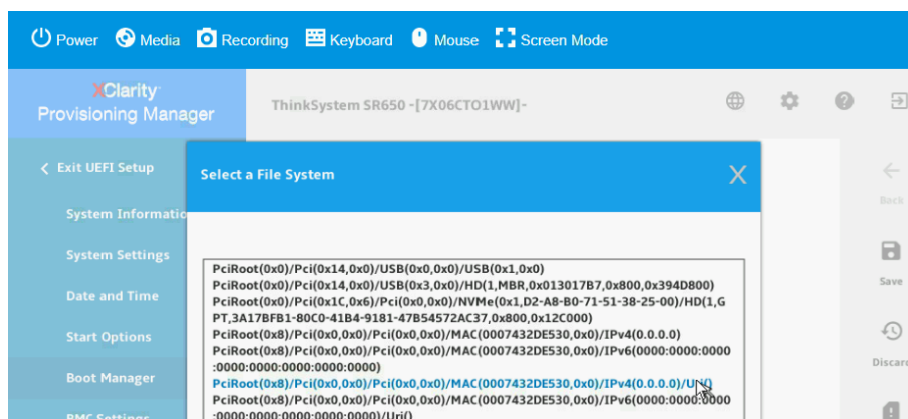


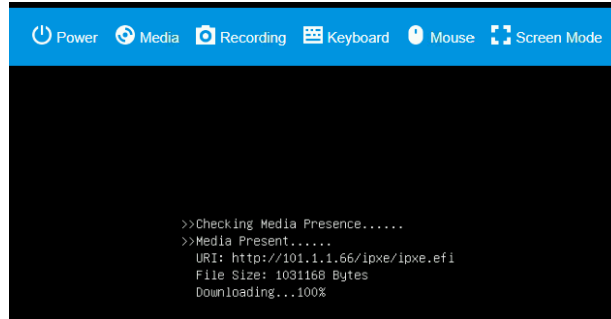

2. iPXE will initialize.

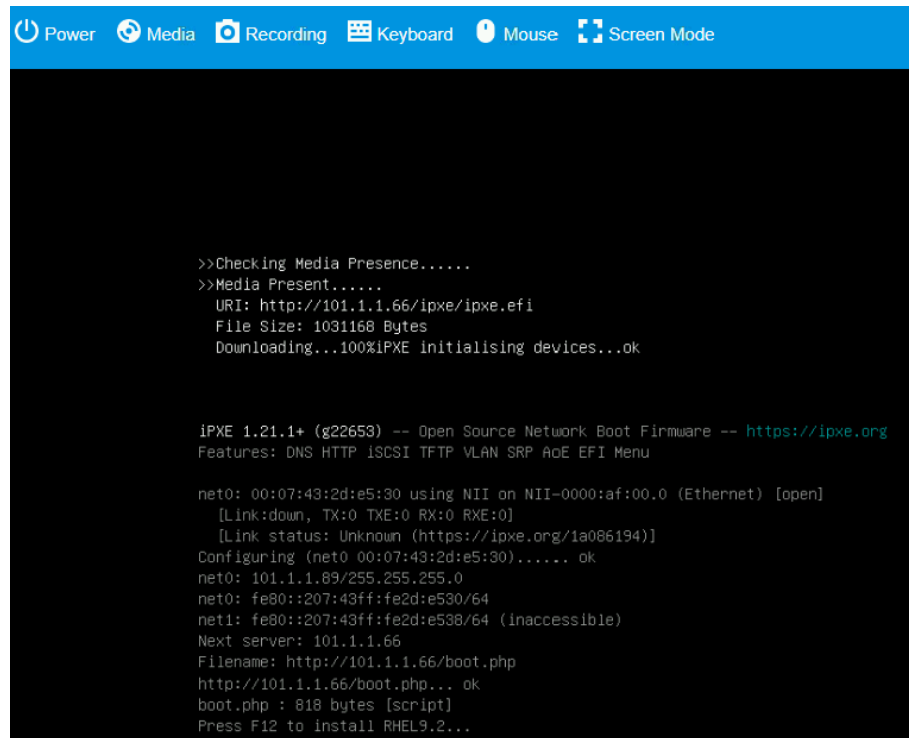

3. Press *F12*. The OS installation menu appears, and continue with the OS installation.

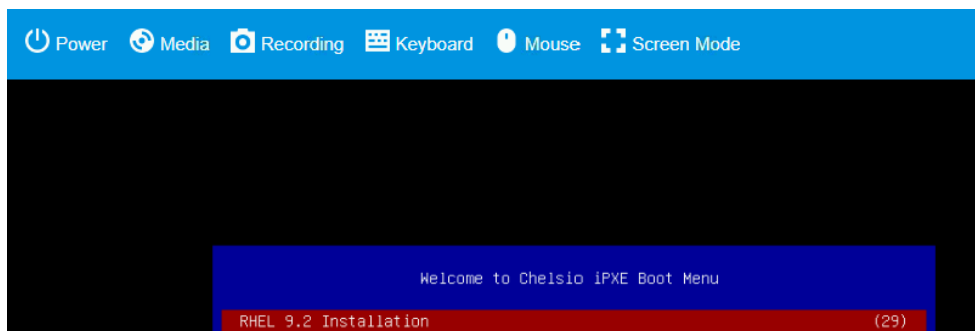

## XXXIV. Appendix

---

## 1. Limitations

The following is the limitation in this release of Chelsio Unified Wire:

- Some iWARP UDP libraries will not compile unless the user has root privileges.

## 2. Troubleshooting

- **Cannot bring up Chelsio interface**

Make sure you have created the corresponding network-script configuration file as stated in [Chelsio Unified Wire](#) chapter (See [Creating Network Manager keyfiles manually](#)). If the file does exist, make sure the structure and contents are correct. A sample is given in the **Chelsio Unified Wire** chapter (See [Configuring NetworkManager keyfiles](#)). Another reason may be that the IP address mentioned in the configuration file is already in use on the network.

- **Cannot ping through Chelsio interface**

First, ensure that the interface was successfully brought up using `ifup ethX` (where `ethX` is your interface) and that it is linked to an IP address, either static or obtained through DHCP.

Then, check whether the destination host (i.e., the machine you are trying to ping) is up and running and accepts ICMP requests such as ping. If you get a return value of 0 when doing a `cat /proc/sys/net/ipv4/icmp_echo_ignore_all` on the remote host that means it is configured to reply to incoming pings. Change `ipv4` to `ipv6` in the path if you are using IPv6. Note that this is a Linux-only tip.

If you have more than one interface wired to the network, ensure that you are using the right one for your outgoing ping requests. This can be done by using the `-I` option of the ping command, as shown in the following example:

```
[root@host~]# ping -I eth1 10.192.167.1
```

Where **10.192.167.1** is the IP address of the machine you want to ping.

- **Configuring firewall for your application**

In many cases, the firewall software on the systems may prevent the applications from working properly. Refer to the appropriate documentation for the Linux distribution on how to configure or disable the firewall.

- **Configuring Ethernet interfaces on the Cisco switch**

Always configure Ethernet interfaces on the Cisco switch in trunk mode.

- **The Cisco nexus switch reporting “pauseRateLimitErrDisable”**

If the switch-port on the Cisco nexus switch is reporting “pauseRateLimitErrDisable”, then perform an Ethernet port shut/no shut.

- **“unexpected CM event” messages seen with iWARP traffic**

One reason for this could be port number collisions. To fix this, use iWARP port mapper (iwpmnd).

```
[root@host~]# iwpmnd
```

 **Note** *iWARP port mapper (iwpmnd) has its own issues.*

- **Multiple Chelsio adapters**

Chelsio Option ROM supports up to four Chelsio adapters in a machine. In case of using more than four adapters, it is recommended to disable the Option ROM on the adapters.

- **Ubuntu OS upgrade**

With the Chelsio Unified Wire package installed, the Ubuntu OS upgrade might run into some Debian package conflicts, because of firmware files. To avoid this,

1. Uninstall the Chelsio Unified Wire Package.

```
[root@host~]# cd ChelsioUwire-x.x.x.x  
[root@host~]# make uninstall
```

2. Upgrade the OS.

```
[root@host~]# apt-get clean  
[root@host~]# apt-get update && apt-get upgrade
```

3. Boot to the newly installed kernel/OS and install Chelsio Unified Wire.

```
[root@host~]# reboot  
[root@host~]# cd ChelsioUwire-x.x.x.x  
[root@host~]# make install
```

- **Installer issues**

In case of any failures while running the Chelsio Unified Wire Installer, collect the below:

- install.log file, if installed using install.py
- Entire make command output, if installed using the makefile

- **Logs collection**

In case of any driver/firmware issues, run the below command to collect all the necessary log files:

```
[root@host~]# chdebug
```

A compressed tar ball, *chelsio\_debug\_logs\_with\_cudbg.tar.bz2* will be created with all the logs.

In case of kernel panics, the following files need to be provided for analysis:

```
vmcore, vmcore-dmesg.txt, vmlinux, System.map-$(uname -r), Chelsio modules  
.ko files
```

## 3. Chelsio End-User License Agreement (EULA)

Installation and use of the driver/software implies acceptance of the terms in the Chelsio End-User License Agreement (EULA).

IMPORTANT: PLEASE READ THIS SOFTWARE LICENSE CAREFULLY BEFORE DOWNLOADING OR OTHERWISE USING THE SOFTWARE OR ANY ASSOCIATED DOCUMENTATION OR OTHER MATERIALS (COLLECTIVELY, THE "SOFTWARE"). BY CLICKING ON THE "OK" OR "ACCEPT" BUTTON YOU AGREE TO BE BOUND BY THE TERMS OF THIS AGREEMENT. IF YOU DO NOT AGREE TO THE TERMS OF THIS AGREEMENT, CLICK THE "DO NOT ACCEPT" BUTTON TO TERMINATE THE INSTALLATION PROCESS.

IMPORTANT: PLEASE READ THIS SOFTWARE LICENSE CAREFULLY BEFORE DOWNLOADING OR OTHERWISE USING THE SOFTWARE OR ANY ASSOCIATED DOCUMENTATION OR OTHER MATERIALS (COLLECTIVELY, THE "SOFTWARE"). BY CLICKING ON THE "OK" OR "ACCEPT" BUTTON YOU AGREE TO BE BOUND BY THE TERMS OF THIS AGREEMENT. IF YOU DO NOT AGREE TO THE TERMS OF THIS AGREEMENT, CLICK THE "DO NOT ACCEPT" BUTTON TO TERMINATE THE INSTALLATION PROCESS.

IMPORTANT: PLEASE READ THIS SOFTWARE LICENSE CAREFULLY BEFORE DOWNLOADING OR OTHERWISE USING THE SOFTWARE OR ANY ASSOCIATED DOCUMENTATION OR OTHER MATERIALS (COLLECTIVELY, THE "SOFTWARE"). BY CLICKING ON THE "OK" OR "ACCEPT" BUTTON YOU AGREE TO BE BOUND BY THE TERMS OF THIS AGREEMENT. IF YOU DO NOT AGREE TO THE TERMS OF THIS AGREEMENT, CLICK THE "DO NOT ACCEPT" BUTTON TO TERMINATE THE INSTALLATION PROCESS.

1. License. Chelsio Communications, Inc. ("Chelsio") hereby grants you, the Licensee, and you hereby accept, a limited, non-exclusive, non-transferable license to install and use the Software with one or more Chelsio network adapters on a single server computer for use in communicating with one or more other computers over a network. You may also make one copy of the Software in machine readable form solely for back-up purposes, provided you reproduce Chelsio's copyright notice and any proprietary legends included with the Software or as otherwise required by Chelsio.

2. Restrictions. The license granted hereunder does not constitute a sale of the Software or any copy thereof. The Software contains trade secrets and, in order to protect them, you may not decompile, reverse engineer, disassemble, or otherwise reduce the Software to a human-perceivable form, except to the extent that such activity is expressly permitted in Section 5 (Authorized Distribution) by applicable law notwithstanding this limitation. You assume full responsibility for the use of the Software and agree to use the Software legally and responsibly. You may not distribute, lease, or lend the Software to third parties except as expressly provided in a separate mutual agreement or under the authorized distribution terms defined in this Agreement.

3. Ownership of Software. As Licensee, you own only the media upon which the Software is recorded or fixed (if applicable), but Chelsio retains all right, title, and interest in and to the Software and all copies of the Software, whether original or subsequent, and regardless of who possesses them. This ownership remains with Chelsio regardless of the form or media in or on which the Software may be embedded.

4. Confidentiality. You agree to maintain the non-public aspects of the Software (including source code and internal logic) in confidence. You shall not disclose the Software to any third party without the express written consent of Chelsio, except where such disclosure is a necessary part of a distribution authorized by Chelsio via mutual agreement. You further agree to take all reasonable precautions to limit access of the Software to those of your employees who reasonably require such access to perform their employment obligations and who are bound by confidentiality agreements with you. In the

event of an authorized distribution, you agree to pass on these confidentiality obligations to the recipient.

5. Authorized Distribution. You are granted a limited, non-exclusive right to distribute the Software to your end-users solely for the purpose of operating [Specific Hardware/System Name] products, provided that:

(a) Flow-Down: You ensure that your end-users are subject to a license agreement with terms no less protective of Chelsio's rights (including Confidentiality and Reverse Engineering restrictions) than those contained herein.

(b) Indemnification: You agree to indemnify and hold Chelsio harmless from any claims arising out of your distribution or your end-users' use of the Software.

6. Term. This license is effective in perpetuity, unless terminated earlier. You may terminate the license at anytime by destroying the Software (including the related documentation), together with all copies or modifications in any form. Chelsio may terminate this license, and this license shall be deemed to have automatically terminated, if you fail to comply with any term or condition of this Agreement. Upon any termination, including termination by you, you must destroy the Software (including the related documentation), together with all copies or modifications in any form.

7. Limited Warranty. If Chelsio furnishes the Software to you on media, Chelsio warrants only that the media upon which the Software is furnished will be free from defects in material or workmanship under normal use and service for a period of thirty (30) days from the date of delivery to you.

CHELSIO DOES NOT AND CANNOT WARRANT THE PERFORMANCE OR RESULTS YOU MAY OBTAIN BY USING THE SOFTWARE OR ANY PART THEREOF. EXCEPT FOR THE FOREGOING LIMITED WARRANTY, CHELSIO MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, AND HEREBY DISCLAIMS ALL OTHER WARRANTIES, INCLUDING, BUT NOT LIMITED TO, NON-INFRINGEMENT OF THIRD PARTY RIGHTS, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow the exclusion of implied warranties or limitations on how long an implied warranty may last, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

8. Remedy for Breach of Warranty. The sole and exclusive liability of Chelsio and its distributors, and your sole and exclusive remedy, for a breach of the above warranty, shall be the replacement of any media furnished by Chelsio not meeting the above limited warranty and which is returned to Chelsio. If Chelsio or its distributor is unable to deliver replacement media which is free from defects in materials or workmanship, you may terminate this Agreement by returning the Software.

9. Limitation of Liability. IN NO EVENT SHALL CHELSIO HAVE ANY LIABILITY TO YOU OR ANY THIRD PARTY FOR ANY INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, HOWEVER CAUSED, AND ON ANY THEORY OF LIABILITY, ARISING OUT OF OR RELATED TO THE LICENSE OR USE OF THE SOFTWARE, INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR LOSS OF ANTICIPATED PROFITS, EVEN IF CHELSIO HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT SHALL CHELSIO'S LIABILITY ARISING OUT OF OR RELATED TO THE LICENSE OR USE OF THE SOFTWARE EXCEED THE AMOUNTS PAID BY YOU FOR THE LICENSE GRANTED HEREUNDER. THESE LIMITATIONS SHALL APPLY NOTWITHSTANDING ANY FAILURE OF ESSENTIAL PURPOSE OF ANY LIMITED REMEDY.

10. High Risk Activities. The Software is not fault-tolerant and is not designed, manufactured or intended for use or resale as online equipment control equipment in hazardous environments requiring fail-safe performance, such as in the operation of

nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines, or weapons systems, in which the failure of the Software could lead directly to death, personal injury, or severe physical or environmental damage. Chelsio specifically disclaims any express or implied warranty of fitness for any high risk uses listed above.

11. Export. You acknowledge that the Software is of U.S. origin and subject to U.S. export jurisdiction. You acknowledge that the laws and regulations of the United States and other countries may restrict the export and re-export of the Software. You agree that you will not export or re-export the Software or documentation in any form in violation of applicable United States and foreign law. You agree to comply with all applicable international and national laws that apply to the Software, including the U.S. Export Administration Regulations, as well as end-user, end-use, and destination restrictions issued by U.S. and other governments.

12. Government Restricted Rights. The Software is subject to restricted rights as follows. If the Software is acquired under the terms of a GSA contract: use, reproduction or disclosure is subject to the restrictions set forth in the applicable ADP Schedule contract. If the Software is acquired under the terms of a DoD or civilian agency contract, use, duplication or disclosure by the Government is subject to the restrictions of this Agreement in accordance with 48 C.F.R. 12.212 of the Federal Acquisition Regulations and its successors and 49 C.F.R. 227.7202-1 of the DoD FAR Supplement and its successors.

13. General. You acknowledge that you have read this Agreement, understand it, and that by using the Software you agree to be bound by its terms and conditions. You further agree that it is the complete and exclusive statement of the agreement between Chelsio and you, and supersedes any proposal or prior agreement, oral or written, and any other communication between Chelsio and you relating to the subject matter of this Agreement. No additional or any different terms will be enforceable against Chelsio unless Chelsio gives its express consent, including an express waiver of the terms of this Agreement, in writing signed by an officer of Chelsio. This Agreement shall be governed by California law, except as to copyright matters, which are covered by Federal law. You hereby irrevocably submit to the personal jurisdiction of, and irrevocably waive objection to the laying of venue (including a waiver of any argument of forum non conveniens or other principles of like effect) in, the state and federal courts located in Santa Clara County, California, for the purposes of any litigation undertaken in connection with this Agreement. Should any provision of this Agreement be declared unenforceable in any jurisdiction, then such provision shall be deemed severable from this Agreement and shall not affect the remainder hereof. All rights in the Software not specifically granted in this Agreement are reserved by Chelsio. You may not assign or transfer this Agreement (by merger, operation of law or in any other manner) without the prior written consent of Chelsio and any attempt to do so without such consent shall be void and shall constitute a material breach of this Agreement.

Should you have any questions concerning this Agreement, you may contact Chelsio by writing to:

Chelsio Communications, Inc.  
735 N Pastoria Avenue,  
Sunnyvale, CA 94085